

Contractor: Eaton Asphalt

Plant: 100




Slack: 0"

4. KY-206 FRAME & COVER "STORM" SUPPLIED BY ICAST
FRAME TO BE CAST INTO TOP PHASE TOP FLANGE SIDE UP


12085 lb

Structure Total: 12985 lb

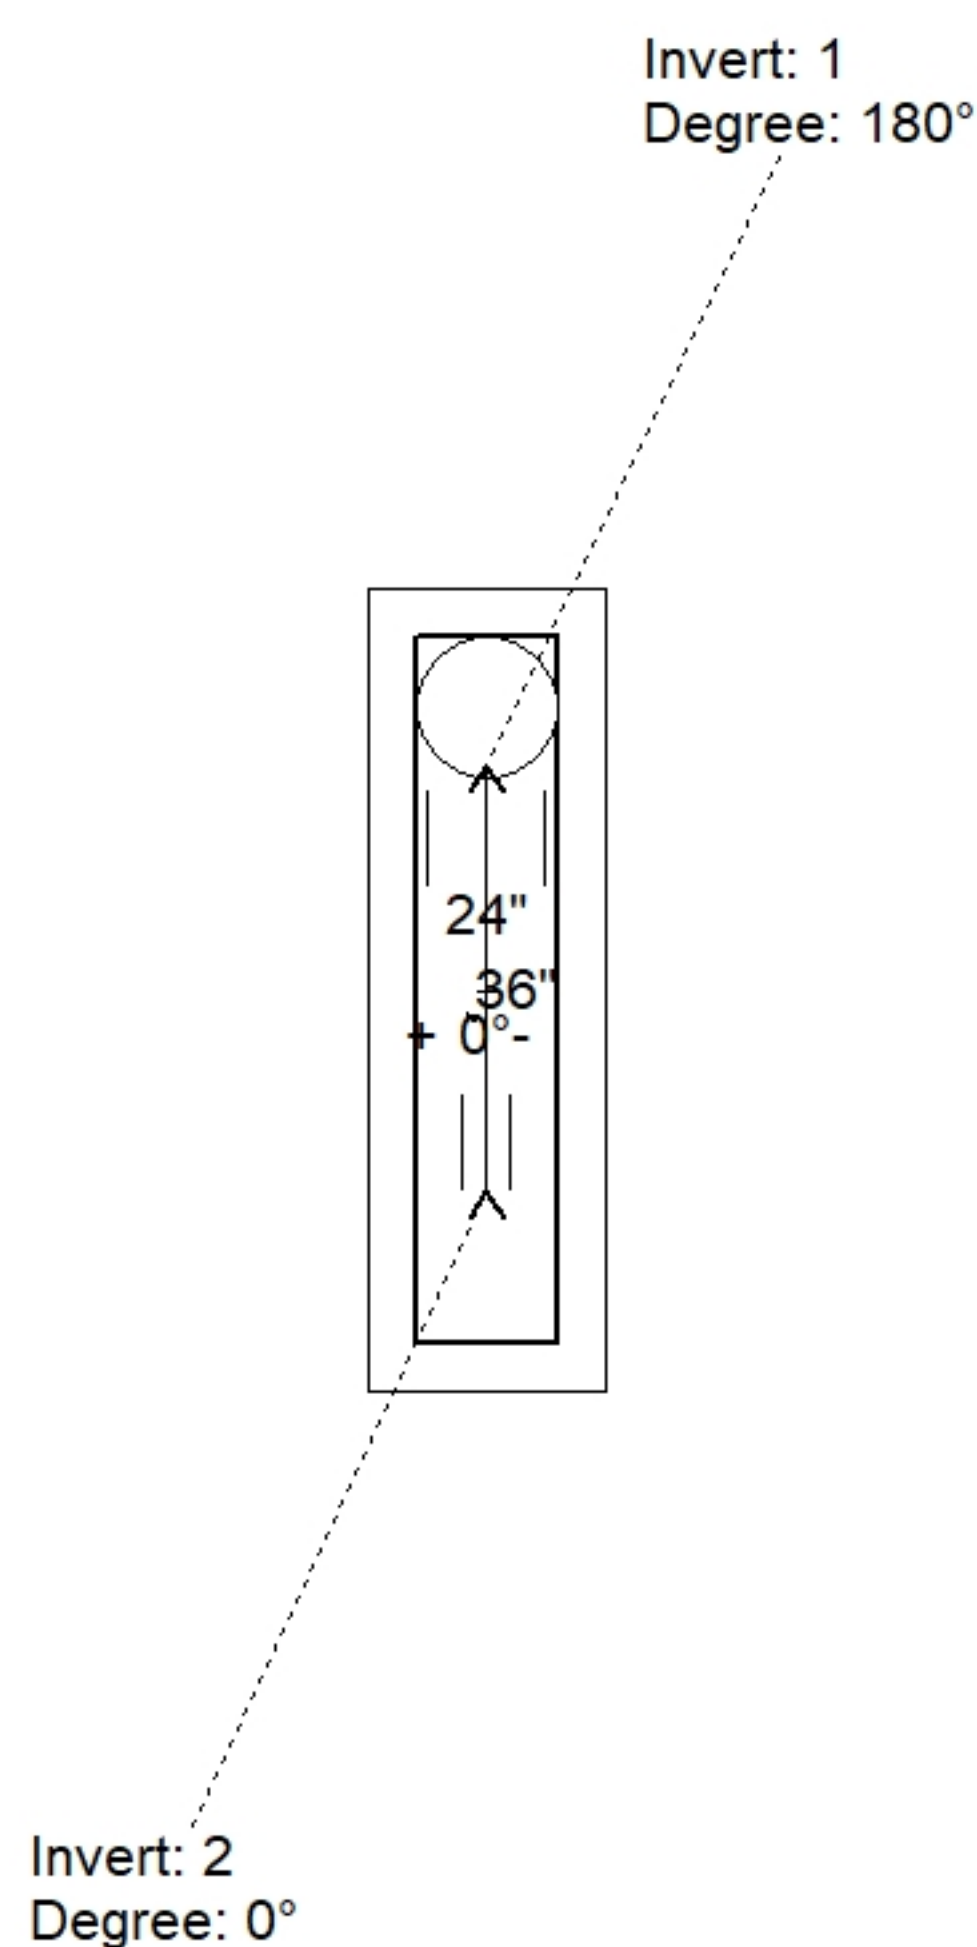

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	891.02'							
Reducer								
Invert 1	886.27'	180°	15" ADS N-12	18"	20"	Hole 20	-2.5"	P1
Invert 2	887.85'	0°	4" HDPE (perf pipe)	4.8"	8"	Hole 8	16.96"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

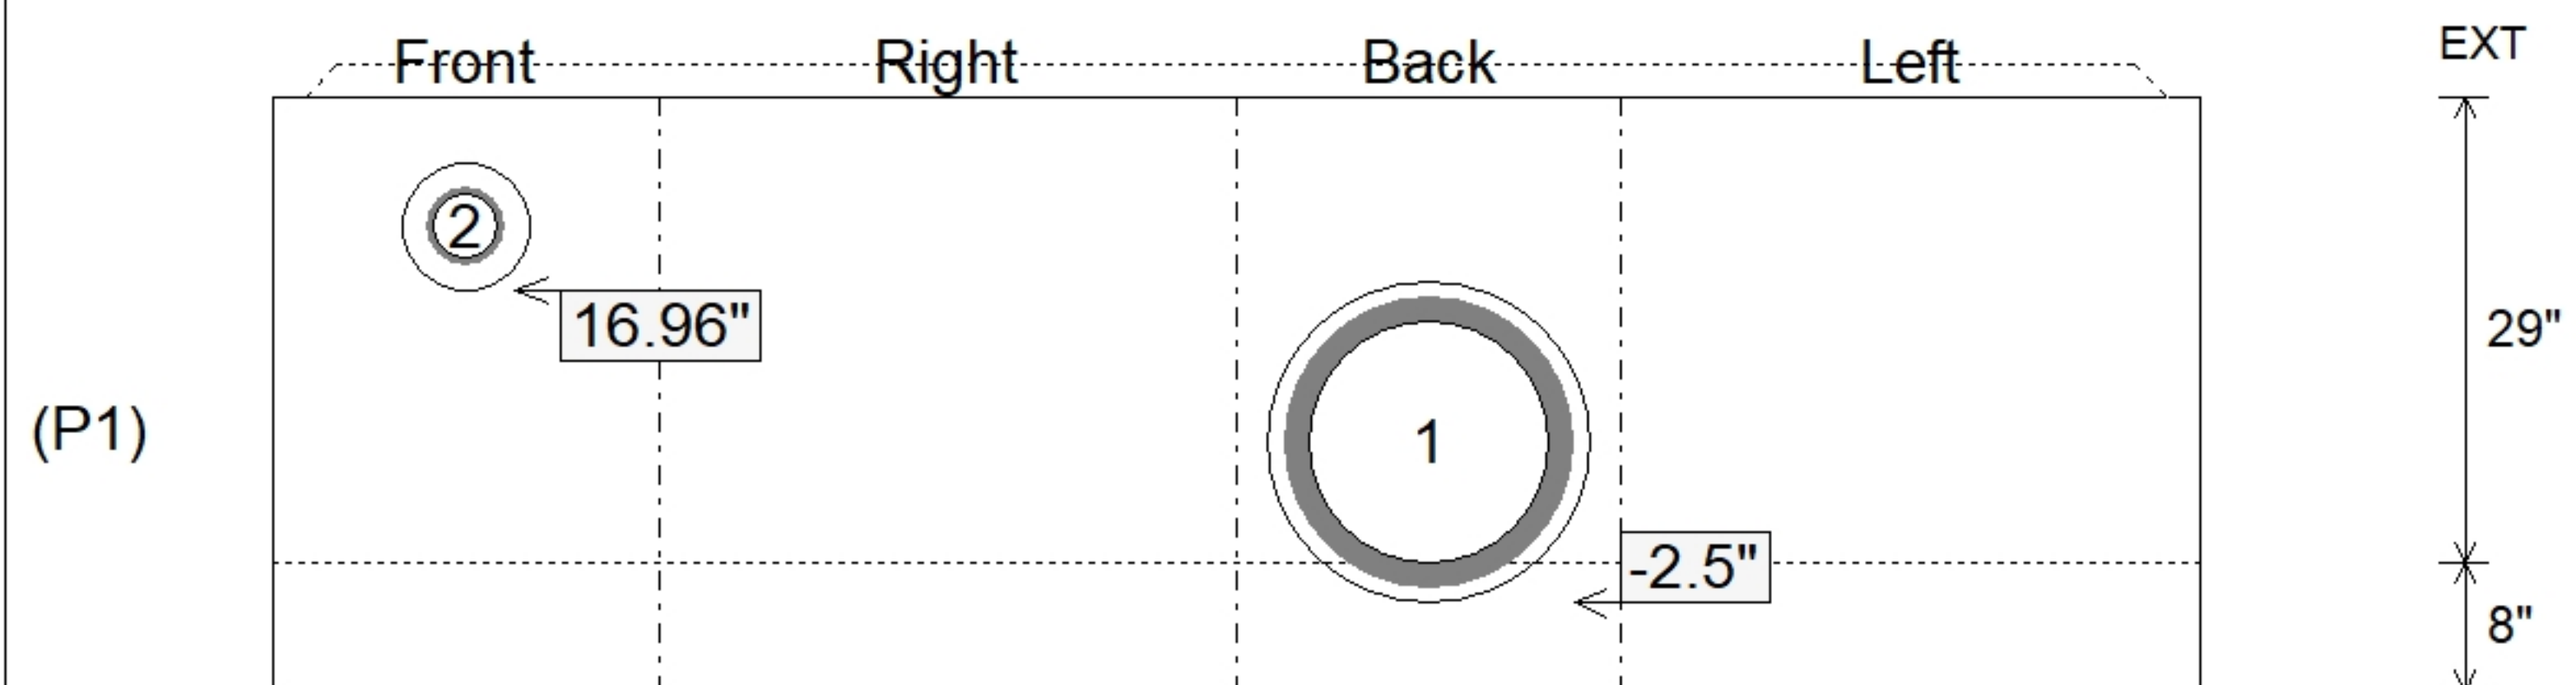

24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 29" - (P1)

SUBMITTAL
APPROVED BY: