

Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)

Job Location: Independence, KY

Contractor: Eaton Asphalt

Plant: 100

7/1/2026 12:29:48 PM

Tech: Jared - A

PC: J. Jarvis



Structure ID: 458

P1 BX24300808VF

BOX BASE 8inW, 8inF, Variable Ht

P3) 15" x 27" - P.I.P. - BY OTHERS - 8"

P2) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE - 8"

P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 40"

1) CASTING - HOE KY-230-G F/G (GRADE)

1) 24" x 30" - Conseal CS-102 1.00"

1) 15" x 27" - Conseal CS-102 1.00"

1) Hole - 20

2) Hole - 4

0 lb

963 lb

4767 lb

237 lb

0 lb

0 lb

0 lb

0 lb

Structure Total: 5967 lb

Structure Notes:

KYTC STATE PROJECT

1. HOE KY-230-G F/G (GRADE) PROVIDED BY ICAST.

2. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S.

3. CONCRETE = 4,000 PSI AT 28 DAYS.

4. REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.

- WALLS (As .31) #5 BARS AT 12" C.C.E.W..

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

5. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB

(SPACED AT 12" CC) AROUND THE 15" X 27" HOLE

Rim: 891.63'

Rim to Invert: 4.67'


Slack: 0.04"

Sump: 0"


Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	886.96'	0°	20"	15" ADS N-12	18"	Hole 20	20"	20"	-2.5"	0"
Invert 2	889.62'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	31.92"	0"
Invert 3	889.62'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	31.92"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

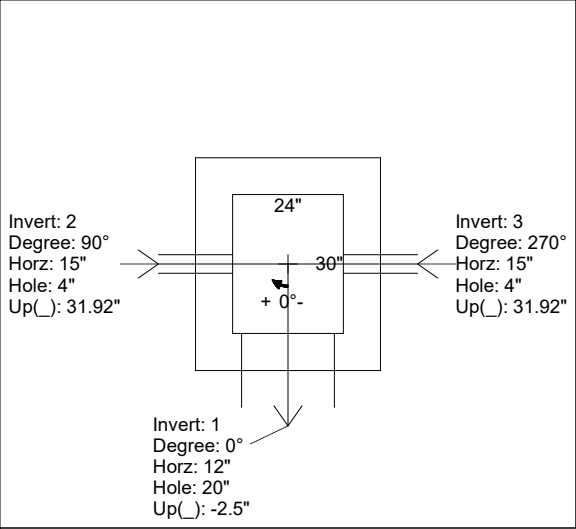

UPSIDE-DOWN VIEW (int. dimenions)

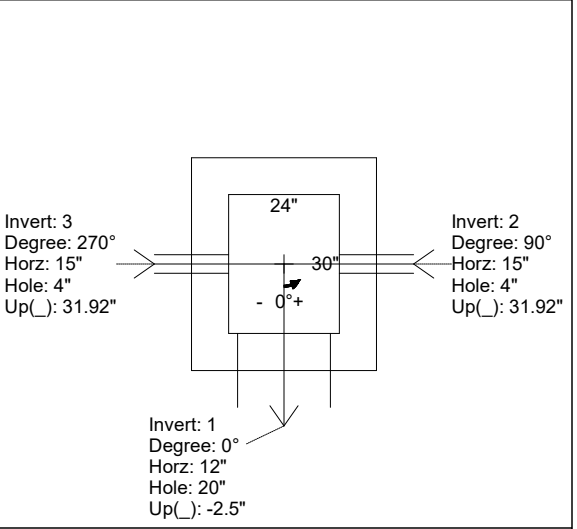

INSIDE WALL DIMENSIONS

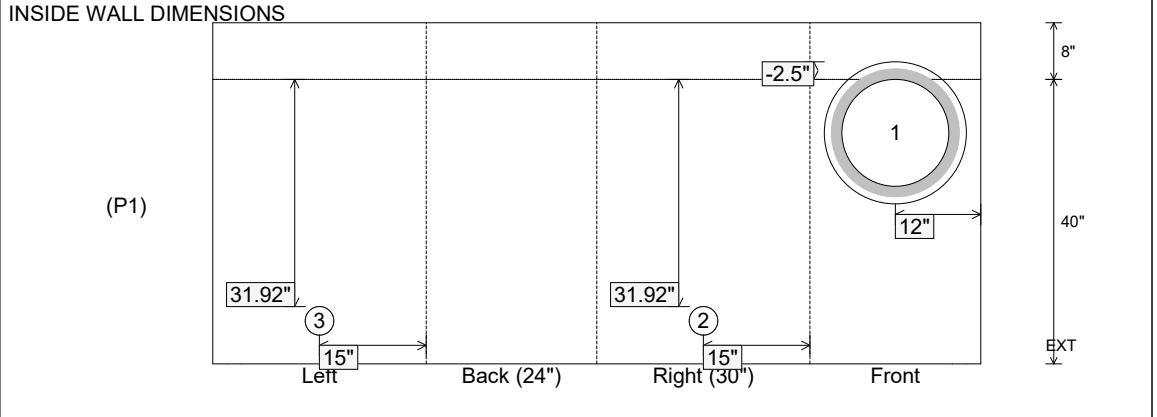

Coating (Int):

Coating (Ext):

Seam Up: Flat

Seam Dn: n/a

Wall Thickness: 8"

Floor Height: 8"

Height (Int): 40"

Height (Ext): 48"

Weight (Net): 4767 lb

Volume (Net): 1.22cu.yd