



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt				Plant: 100 7/1/2026 12:36:38 PM		Tech: Jared - A PC: J. Jarvis						
Structure ID: 460												
P2		BX2430-08R18		BOX RISER 8inW								
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE - 8" P2) 24" x 30" - BOX RISER 8inW - 18" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 44" 1) CASTING - HOE KY-230-G F/G (GRADE) 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 2) Hole - 24 2) Hole - 4						0 lb 963 lb 1675 lb 4839 lb 237 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 7714 lb		Structure Notes: . **KYTC STATE PROJECT** 1. HOE KY-230-G F/G (GRADE) PROVIDED BY ICAST. 2. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 5. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB (SPACED AT 12" CC) AROUND THE 15" X 27" HOLE				
Rim: 892.74'		Rim to Invert: 6.54'		Slack: 0.48"		Sump: 0"		Step Position:				
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1												
Invert 2												
Invert 3	890.74'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	8.48"	0"		
Invert 4	890.74'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	8.48"	0"		
Invert 5												
Invert 6												
Invert 7												
Invert 8												

RIGHT-SIDE UP VIEW (int. dimensions)

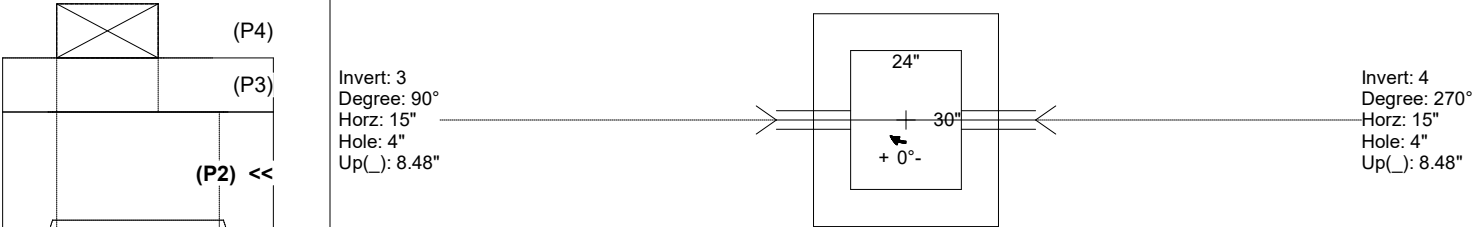

INSIDE WALL DIMENSIONS

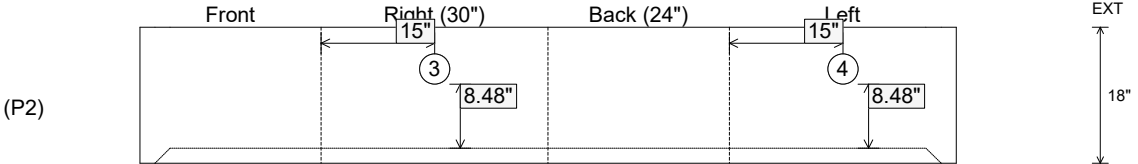

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 18" Height (Ext): 18"	Weight (Net): 1675 lb Volume (Net): 0.43cu.yd
----------------------------------	----------------------------------	--	--	--