



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt				Plant: 100 7/1/2026 12:29:54 PM		Tech: Jared - A PC: J. Jarvis				
Structure ID: 461										
P1 MH048BA54		MH BASE								
P4) 24" - CASTING HEIGHT - 8" P3) 24" - GRADE RING - 3" P2) 48" - ECC CONE w/ 24" HOLE - 24" P1) 48" - MH BASE - 54" 1) CASTING - HOE KY-510 F/C (KY TY.2) 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 20 6) MH Step ML-10-TDS-NCR - 10"				0 lb 202 lb 1550 lb 4573 lb 510 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 6835 lb		Structure Notes: . **KYTC STATE PROJECT** 1. HOE KY-510 F/C (KY TY2) PROVIDED BY ICAST. 2. PER KYTC MH A / ASTM C478 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60.) - CONE (As .62) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.				
Rim: 893.11' Rim to Invert: 7.23' Slack: 0.76" Sump: 3" Step Position: 0°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	885.88'	0°	0"	18" ADS N-12	22"	Hole 24	24"	25.133"	0"	0"
Invert 2	885.88'	146°	73.897"	18" ADS N-12	22"	Hole 24	24"	25.133"	0"	0"
Invert 3	885.88'	247°	125.018"	15" ADS N-12	18"	Hole 20	20"	20.629"	0.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

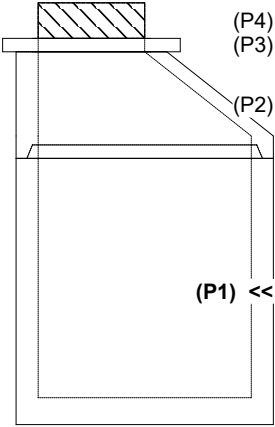

(P4)
(P3)
(P2)
(P1) <<

RIGHT-SIDE UP VIEW (int. dimensions)

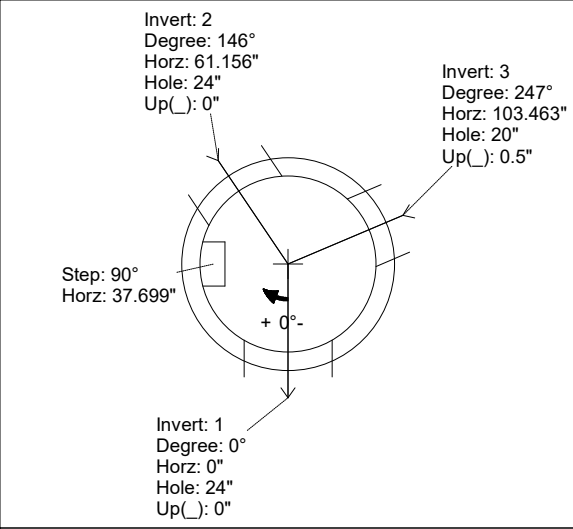

Invert: 2
Degree: 146°
Horz: 61.156"
Hole: 24"
Up(): 0"


Invert: 3
Degree: 247°
Horz: 103.463"
Hole: 20"
Up(): 0.5"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 24"
Up(): 0"

Step: 90°
Horz: 37.699"

+ 0°-

UPSIDE-DOWN VIEW (int. dimensions)

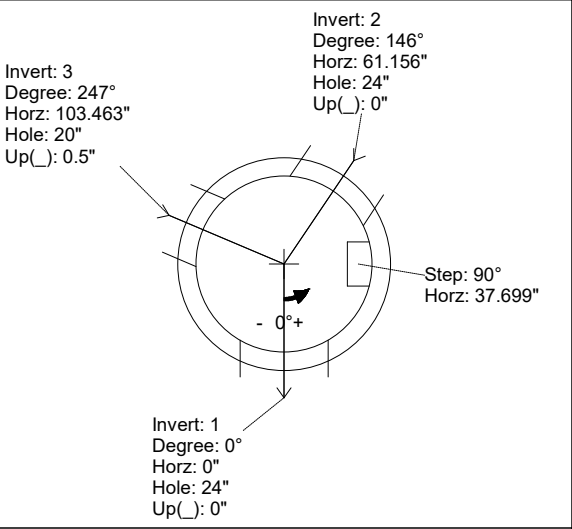

Invert: 2
Degree: 146°
Horz: 61.156"
Hole: 24"
Up(): 0"


Invert: 3
Degree: 247°
Horz: 103.463"
Hole: 20"
Up(): 0.5"

Invert: 1
Degree: 0°
Horz: 0"
Hole: 24"
Up(): 0"

Step: 90°
Horz: 37.699"

- 0°+

INSIDE WALL DIMENSIONS

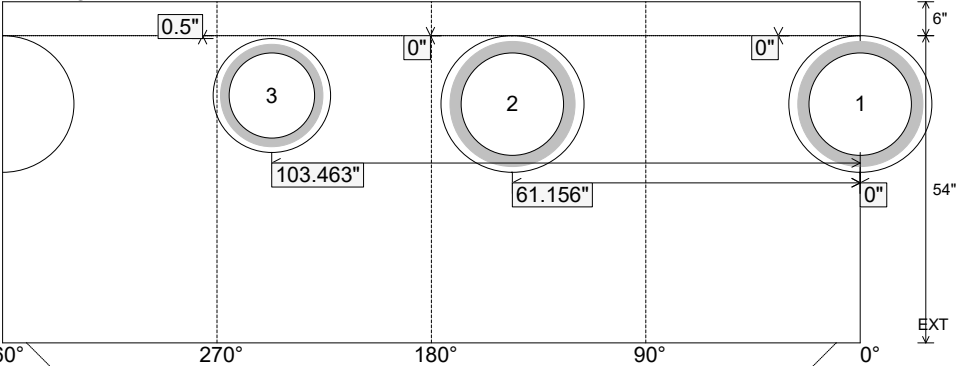

(P1)

0.5" 0" 0"

103.463" 61.156" 0"

360° 270° 180° 90° 0°

6" 54" EXT

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 54" Height (Ext): 60"	Weight (Net): 4573 lb Volume (Net): 1.17cu.yd
----------------------------------	---------------------------------	--	--	--