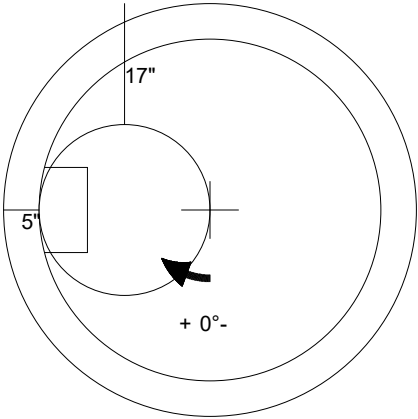
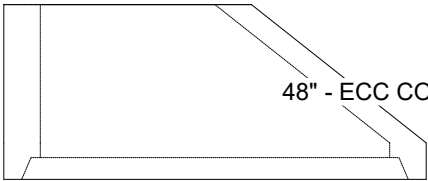


Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt		Plant: 100 7/1/2026 12:33:19 PM	Tech: Jared - A PC: J. Jarvis		
Structure ID: 461					
P2 MH048CN24		ECC CONE w/ 24" HOLE			
P4) 24" - CASTING HEIGHT - 8" P3) 24" - GRADE RING - 3" P2) 48" - ECC CONE w/ 24" HOLE - 24" P1) 48" - MH BASE - 54" 1) CASTING - HOE KY-510 F/C (KY TY.2) 1) 48" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 20 6) MH Step ML-10-TDS-NCR - 10"		0 lb 202 lb 1550 lb 4573 lb 510 lb 0 lb 0 lb 0 lb 0 lb ----- 6835 lb	Structure Notes: . **KYTC STATE PROJECT** 1. HOE KY-510 F/C (KY TY2) PROVIDED BY ICAST. 2. PER KYTC MH A / ASTM C478 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60.) - CONE (As .62) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.		
					
 48" - ECC CONE w/ 24" HOLE - 24" - (P2)					
Coating (Int): Coating (Ext):		Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 24"	Weight (Net): 1550 lb Volume (Net): 0.33cu.yd