

Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)
Job Location: Independence, KY
Contractor: Eaton Asphalt

Plant: 100

7/1/2026 12:33:22 PM

Tech: Jared - A

PC: J. Jarvis



Structure ID: 463

P2 BX024060-08LD08-1559

BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S)

P3) 15" x 59" - P.I.P. - BY OTHERS - 8"
P2) 24" x 60" - BX FLAT LID 8inW, w/15"x59" HOLE (KYTC DBI-13S) - 8"
P1) 24" x 60" - BOX BASE 8inW, 8inF - 42"
1) CASTING - HOE KY-230-S F/G (SAG)
1) 24" x 60" - Conseal CS-102 1.00"
1) Hole - 20
2) Hole - 4


0 lb
1461 lb
7183 lb
474 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 9118 lb


Structure Notes:

****KYTC STATE PROJECT****

1. HOE KY-230-S F/G (SAG) PROVIDED BY ICAST.
2. KYTC DBI TYPE 13S / ASTM C-913 SPEC'S.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. (DBL MAT).
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W..
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
5. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB
(SPACED AT 12" CC) AROUND THE 15" X 59" HOLE

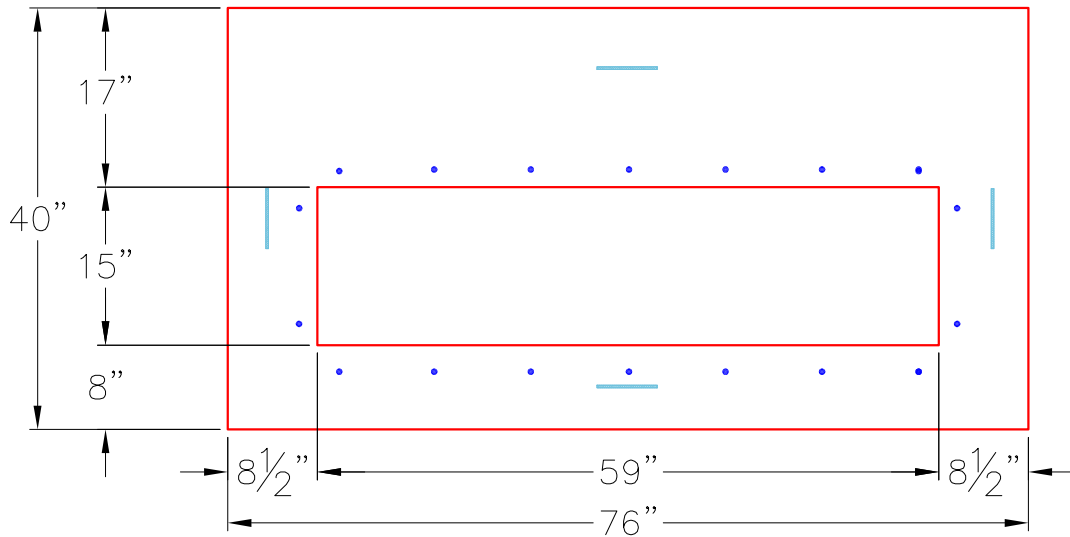

TOP VIEW

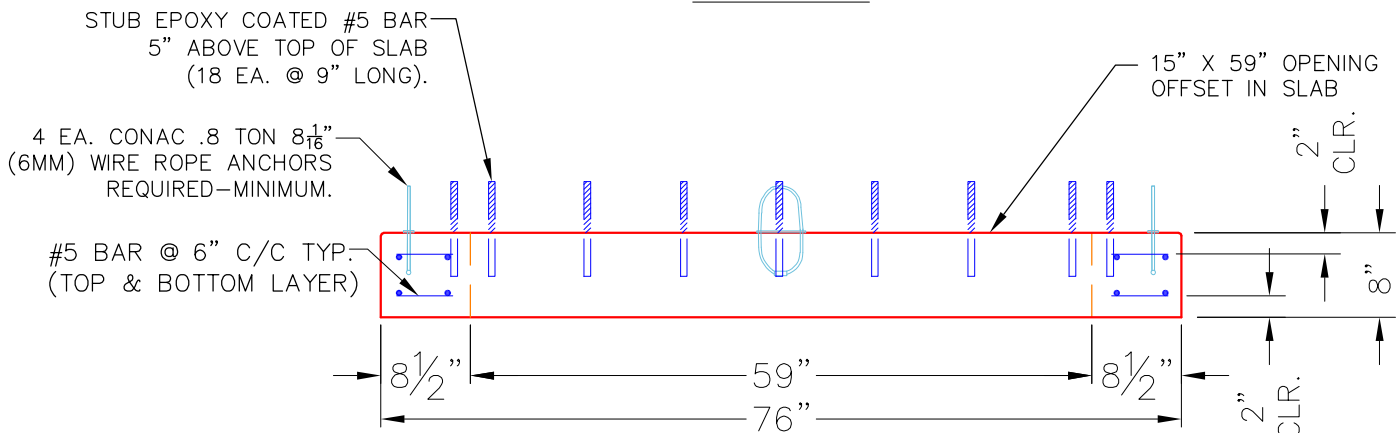

FRONT VIEW

NOTES:

- CONCRETE: 4500 PSI @ 28 DAYS.
- MANUFACTURED TO KYTC & ASTM C-913 SPECIFICATIONS.
- REINFORCING: #5 BAR AS SHOWN-GRADE 60. (T&B LAYER)
- 4 EA. CONAC WIRE LOOP LIFTS REQUIRED (MIN.)

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1461 lb
Volume (Net): 0.37cu.yd