

Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)
Job Location: Independence, KY
Contractor: Eaton Asphalt

Plant: 100

7/1/2026 12:30:38 PM

Tech: Jared - A

PC: J. Jarvis



Structure ID: 472

P1 BX2436-08BVF

BOX BASE 8inW, 8inF, Variable Ht

- P4) 15" x 27" - P.I.P. - BY OTHERS - 8"
P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE - 8"
P2) 24" x 36" - CB FT REDUCER 24"x30" HOLE - 8"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 49"
1) CASTING - HOE KY-230-G F/G (GRADE)
1) 24" x 36" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) 15" x 27" - Conseal CS-102 1.00"
2) Hole - 30
1) Hole - 20
2) Hole - 4

0 lb
963 lb
913 lb
5172 lb
237 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb

Structure Total: 7285 lb

Structure Notes:

KYTC STATE PROJECT




- HOE KY-230-G F/G (GRADE) PROVIDED BY ICAST.
- KYTC DBI TYPE 13G / ASTM C-913 SPEC'S.
- CONCRETE = 4,000 PSI AT 28 DAYS.
- REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W..
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
- STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB
(SPACED AT 12" CC) AROUND THE 15" X 27" HOLE

Rim: 893.69' Rim to Invert: 6.14' Slack: 0.68" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	887.55'	110°	29.347"	24" ADS N-12	28"	Hole 30	30"	31.925"	-3"	-3.696"
Invert 2	887.55'	180°	21"	15" ADS N-12	18"	Hole 20	20"	20"	-2.5"	1"
Invert 3	887.55'	285°	28.253"	24" ADS N-12	28"	Hole 30	30"	31.058"	-3"	-3"
Invert 4	890.69'	0°	20"	4" WEEP HOLE	4"	Hole 4	4"	4"	37.68"	0"
Invert 5	890.69'	180°	20"	4" WEEP HOLE	4"	Hole 4	4"	4"	37.68"	0"
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

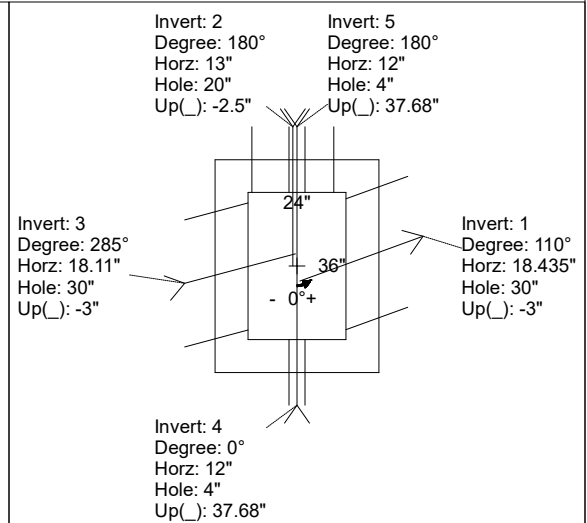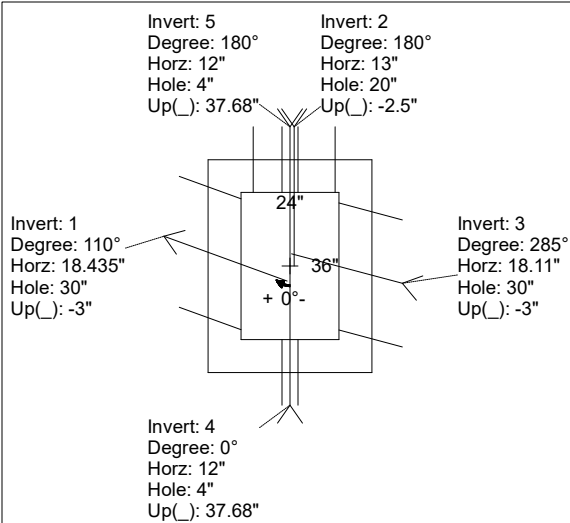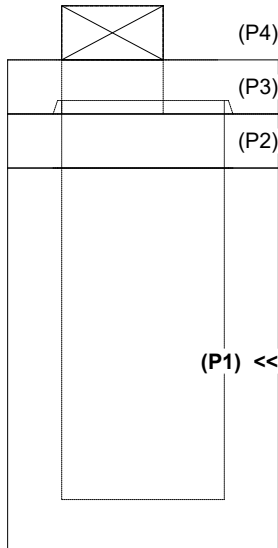

INSIDE WALL DIMENSIONS

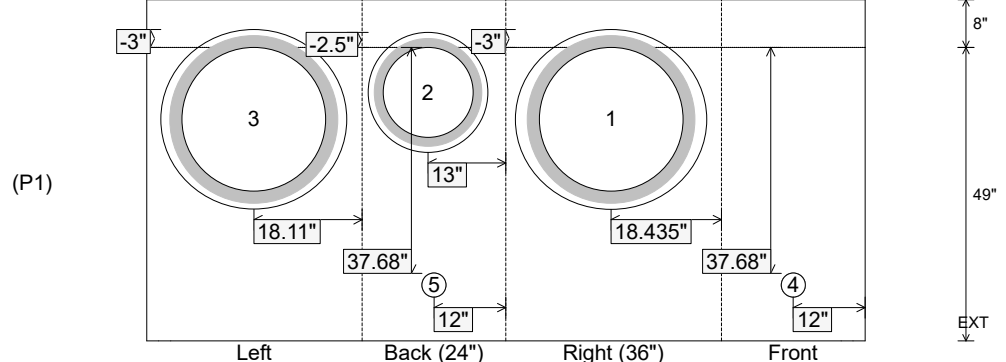

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: n/a

Wall Thickness: 8"
Floor Height: 8"

Height (Int): 49"
Height (Ext): 57"

Weight (Net): 5172 lb
Volume (Net): 1.32cu.yd