

Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)
Job Location: Independence, KY
Contractor: Eaton Asphalt

Plant: 100

7/1/2026 12:33:22 PM

Tech: Jared - A

PC: J. Jarvis



Structure ID: 472

P2 BX024036-08TS024030

CB FT REDUCER 24"X30" HOLE


- P4) 15" x 27" - P.I.P. - BY OTHERS - 8"
P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE - 8"
P2) 24" x 36" - CB FT REDUCER 24"X30" HOLE - 8"
P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 49"
1) CASTING - HOE KY-230-G F/G (GRADE)
1) 24" x 36" - Conseal CS-102 1.00"
1) 24" x 30" - Conseal CS-102 1.00"
1) 15" x 27" - Conseal CS-102 1.00"
2) Hole - 30
1) Hole - 20
2) Hole - 4

Structure Total: 7285 lb


Structure Notes:

****KYTC STATE PROJECT****

1. HOE KY-230-G F/G (GRADE) PROVIDED BY ICAST.
2. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W..
 - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
5. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB
(SPACED AT 12" CC) AROUND THE 15" X 27" HOLE

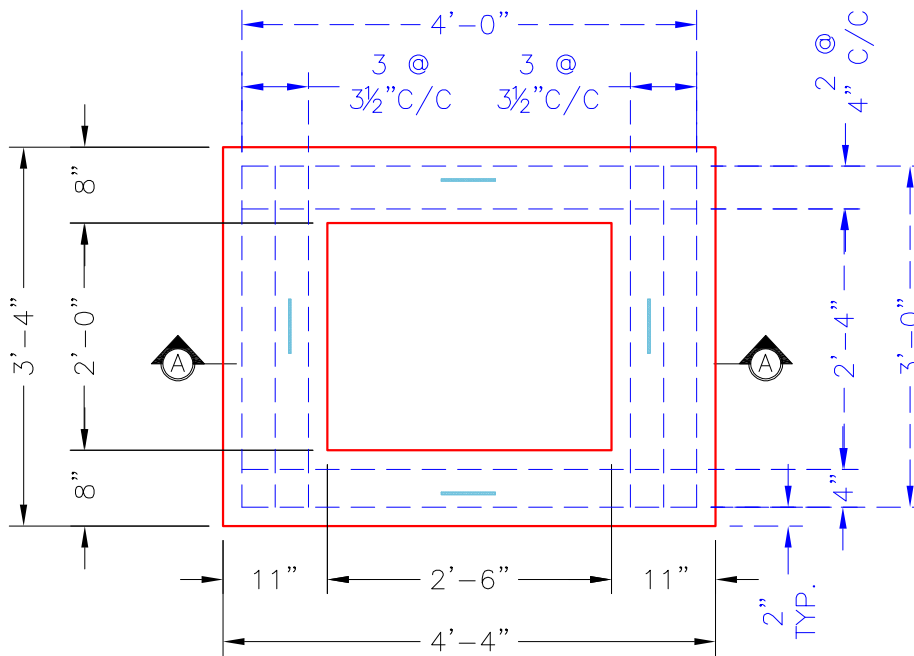

PLAN VIEW

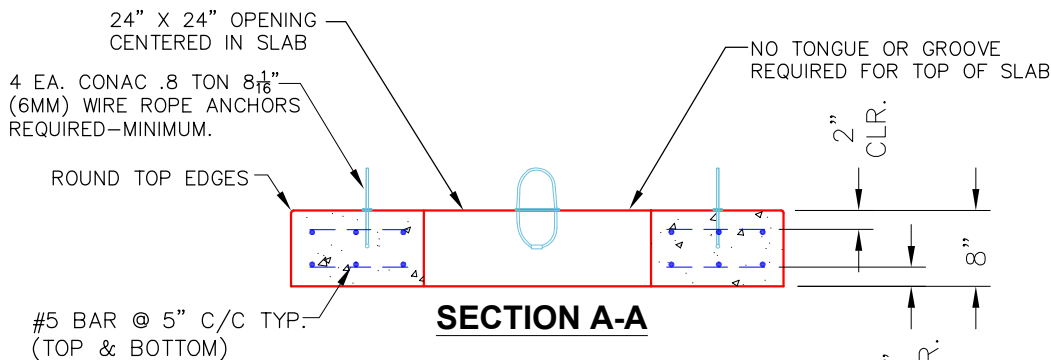

NOTES:

- CONCRETE: 4500 PSI @ 28 DAYS.
- MANUFACTURED TO KYTC & ASTM C-913 SPECIFICATIONS.
- REINFORCING: #5 BAR AS SHOWN-GRADE 60. (T&B LAYER)
- 4 EA. CONAC WIRE LOOP LIFTS REQUIRED (MIN.)

#5 BAR CUT LIST

- 8 EA. @ 48" LG.
- 12 EA. @ 36" LG.

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 913 lb
Volume (Net): 0.23cu.yd