



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt					Plant: 100 7/1/2026 12:36:37 PM		Tech: Jared - A PC: J. Jarvis				
Structure ID: 476											
P2 BX2430-08R30 BOX RISER 8inW											
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE - 8" P2) 24" x 30" - BOX RISER 8inW - 30" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht - 43" 1) CASTING - HOE KY-230-G F/G (GRADE) 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 2) Hole - 24 2) Hole - 4						0 lb 963 lb 2803 lb 4669 lb 237 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 8672 lb		Structure Notes: . **KYTC STATE PROJECT** 1. HOE KY-230-G F/G (GRADE) PROVIDED BY ICAST. 2. KYTC DBI TYPE 13G / ASTM C-913 SPEC'S. 3. CONCRETE = 4,000 PSI AT 28 DAYS.. 4. REINFORCING PER ASTM A615 (GRADE 60). - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W. - WALLS (As .31) #5 BARS AT 12" C.C.E.W.. - FLOOR (As .31) #5 BARS AT 12" C.C.E.W. 5. STUB #5 BARS 12" OUT OF THE TOP OF THE SLAB (SPACED AT 12" CC) AROUND THE 15" X 27" HOLE			
Rim: 893' Rim to Invert: 7.44' Slack: 0.28" Sump: 0" Step Position:											
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3	891'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	20.28"	0"	
Invert 4	891'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	20.28"	0"	
Invert 5											
Invert 6											
Invert 7											
Invert 8											

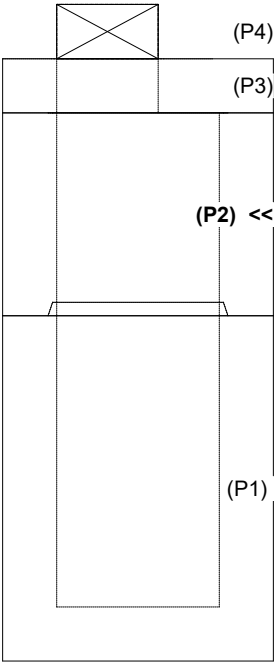

(P4)
(P3)
(P2) <<
(P1)


RIGHT-SIDE UP VIEW (int. dimensions)

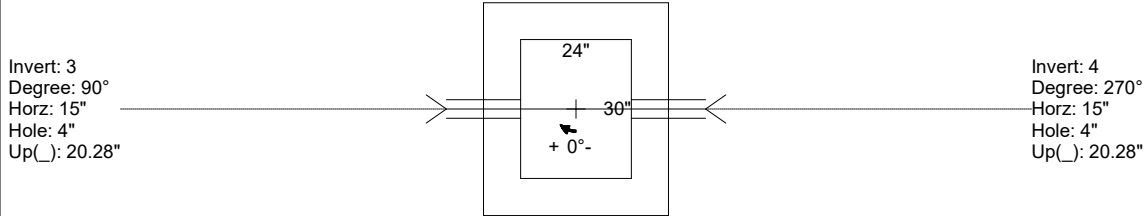

Invert: 3
Degree: 90°
Horz: 15"
Hole: 4"
Up(): 20.28"

Invert: 4
Degree: 270°
Horz: 15"
Hole: 4"
Up(): 20.28"

INSIDE WALL DIMENSIONS

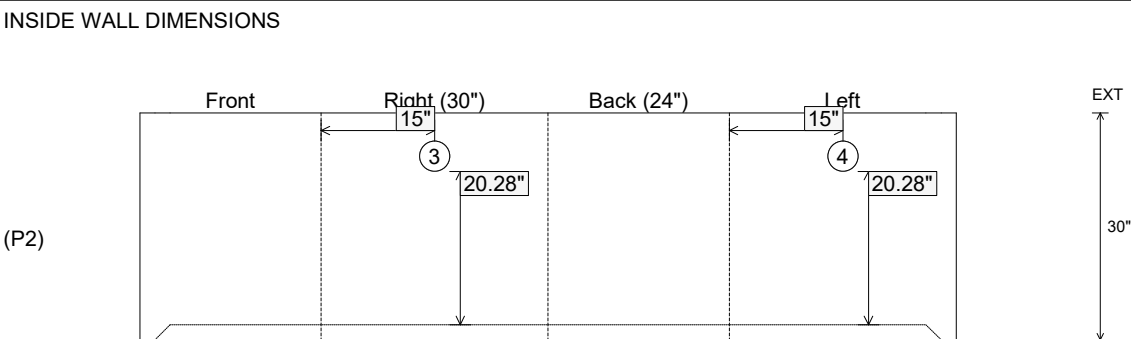

(P2)

Front Right (30") 15" 20.28" 3
Back (24") Left 15" 20.28" 4
EXT 30"

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 30" Height (Ext): 30"	Weight (Net): 2803 lb Volume (Net): 0.72cu.yd
----------------------------------	----------------------------------	--	--	--