
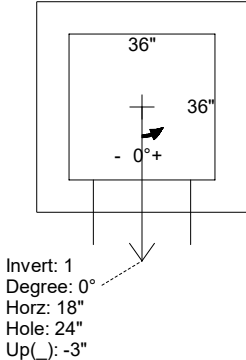
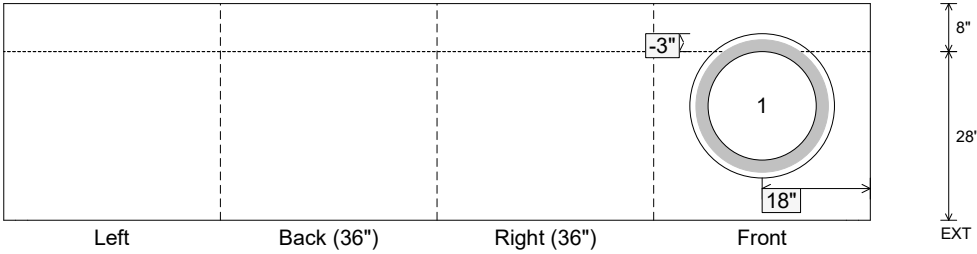


Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt					Plant: 100 6/4/2026 4:52:20 PM		Tech: Jared - A PC: J. Jarvis				
Structure ID: 507											
P1		BX3636-08BAVF		BOX BASE 8inW, 8inF, Variable Ht F/n							
P2) 36" x 36" - P.I.P. - BY OTHERS - 8" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 28" 1) CASTING - HOE KY-316 SET (DBI 1) 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 24					0 lb 4820 lb 317 lb 0 lb 0 lb Structure Total: 5137 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC DBI TY 1 / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STORM INVERT 5. NO STEPS 6. KY-316 FRAME & GRATES SUPPLIED BY ICAST - FRAME TO BE POURED IN PLACE BY OTHERS 7. STUB #5 BAR @ 12" C.C. (GRADE 60) 20" OUT TOP OF WALLS FOR FIELD POUR TIE-IN - MIN. 4" PENETRATION INTO WALLS				
Rim: 867'		Rim to Invert: 3'		Slack: 0"		Sump: 0"		Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1	864'	0°	26"	18" ADS N-12	22"	Hole 24	24"	24"	-3"	0"	
Invert 2											
Invert 3											
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											
RIGHT-SIDE UP VIEW (int. dimensions) UPSIDE-DOWN VIEW (int. dimenions)   INSIDE WALL DIMENSIONS  Coating (Int): Coating (Ext): Seam Up: Flat Seam Dn: n/a Wall Thickness: 8" Floor Height: 8" Height (Int): 28" Height (Ext): 36" Weight (Net): 4820 lb Volume (Net): 1.23cu.yd											