



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt				Plant: 100 6/4/2026 4:54:16 PM		Tech: Jared - A PC: J. Jarvis						
Structure ID: 517												
P2 BX2436-08R-VH				BOX RISER 8inW, Variable Ht T/G								
P4) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10" P3) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18" P2) 24" x 36" - BOX RISER 8inW, Variable Ht T/G - 19" P1) 24" x 36" - BOX BASE 8inW, 8inF T/n - 60" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) This Structure Includes a Cast-in Item - KY-206 Frame (Supplied by iCast) 2) 24" x 36" - Conseal CS-102 1.00" 3) Hole - 24 1) Hole - 20 2) Hole - 8						3398 lb 5270 lb 1871 lb 6548 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TY A / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STEPS 5. KY-206 FRAME & COVER "STORM" SUPPLIED BY iCAST - FRAME TO BE CAST INTO TOP PHASE TOP FLANGE SIDE UP				
Rim: 837.19' Rim to Invert: 8.96' Slack: 0.52" Sump: 0" Step Position:						Structure Total: 17293 lb						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5	833.98'	0°	20"	4" HDPE (perf pipe)	4.8"	Hole 8	8"	8"	5"	0"		
Invert 6	833.98'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 8	8"	8"	5"	0"		
Invert 7												
Invert 8												

RIGHT-SIDE UP VIEW (int. dimensions)

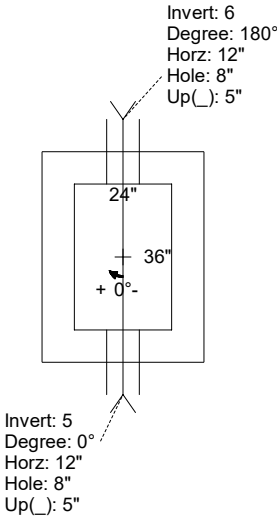

INSIDE WALL DIMENSIONS

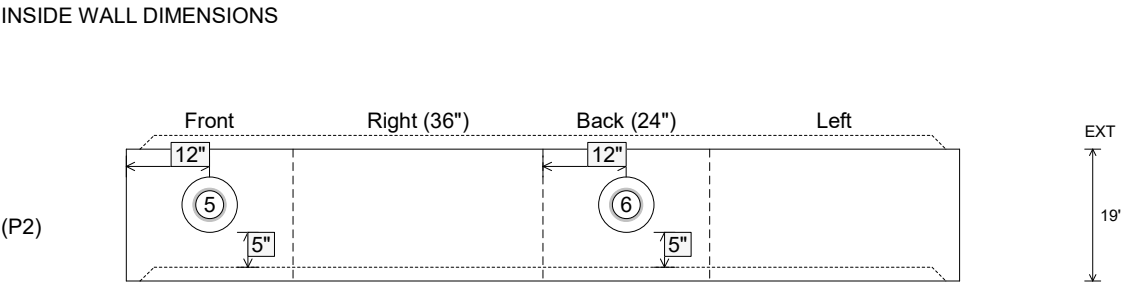

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 19" Height (Ext): 19"	Weight (Net): 1871 lb Volume (Net): 0.48cu.yd
----------------------------------	------------------------------------	--	--	--