




Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt				Plant: 100 6/5/2026 9:04:13 AM		Tech: Jared - A PC: J. Jarvis						
Structure ID: 539												
P2 BX2430-08R24				BOX RISER 8inW F/G								
P4) 15" x 27" - P.I.P. - BY OTHERS - 8" P3) 24" x 30" - CB FLAT TOP 8"W w/15"x27" HOLE F/F - 8" P2) 24" x 30" - BOX RISER 8inW F/G - 24" P1) 24" x 30" - BOX BASE 8inW, 8inF, Variable Ht T/n - 35" 1) CASTING - HOE KY-230-G F/G (GRADE) 2) 24" x 30" - Conseal CS-102 1.00" 1) 15" x 27" - Conseal CS-102 1.00" 2) Hole - 24 2) Hole - 4						0 lb 963 lb 2239 lb 3993 lb 237 lb 0 lb 0 lb 0 lb 0 lb ----- 7432 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC DBI TY 13G / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STEPS 5. KY-230G FRAME & GRATE SUPPLIED BY ICAST - POURED IN PLACE BY OTHERS				
Rim: 836.53' Rim to Invert: 6.31' Slack: 0.72" Sump: 0" Step Position:												
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset		
Invert 1												
Invert 2												
Invert 3	834.47'	90°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	14"	0"		
Invert 4	834.47'	270°	23"	4" WEEP HOLE	4"	Hole 4	4"	4"	14"	0"		
Invert 5												
Invert 6												
Invert 7												
Invert 8												

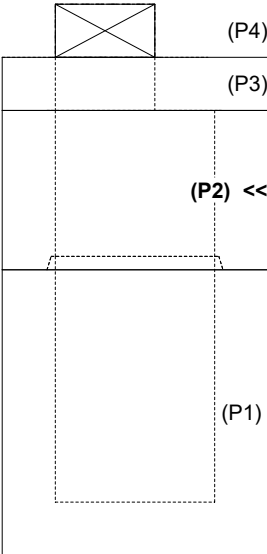

RIGHT-SIDE UP VIEW (int. dimensions)

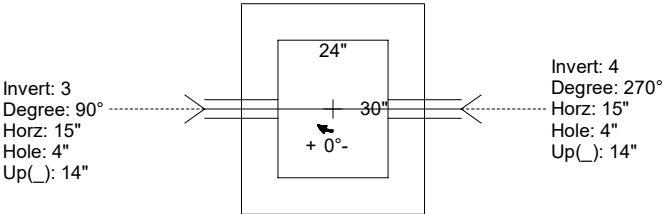

INSIDE WALL DIMENSIONS

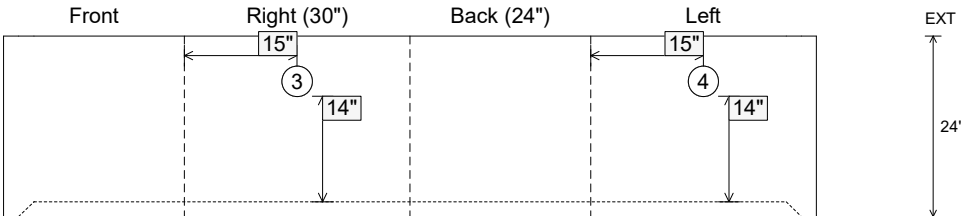

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 2239 lb Volume (Net): 0.57cu.yd
----------------------------------	----------------------------------	--	--	--