



Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320) Job Location: Independence, KY Contractor: Eaton Asphalt					Plant: 100 6/4/2026 4:54:15 PM		Tech: Jared - A PC: J. Jarvis						
Structure ID: 567													
P2		BX2436-08R24		BOX RISER 8inW T/G									
P4) 24" x 120" - CB INLET KY A 10' TOP RIGHT F/G - 10" P3) 24" x 120" - CB INLET KY A 10' BOTTOM RIGHT T/G - 18" P2) 24" x 36" - BOX RISER 8inW T/G - 24" P1) 24" x 36" - BOX BASE 8inW, 8inF, Variable Ht T/n - 40" 1) CASTING - HOE KY-206 F/C (KY TY1) 1) This Structure Includes a Cast-in Item - KY-206 Frame (Supplied by iCast) 2) 24" x 36" - Conseal CS-102 1.00" 2) Hole - 24 1) Hole - 20 2) Hole - 8						3398 lb 5270 lb 2381 lb 4660 lb 206 lb 0 lb 0 lb 0 lb 0 lb 0 lb		Structure Notes: ** KYTC STATE PROJECT ** 1. PER KYTC CBI TY A / ASTM C-913 SPECS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. NO STEPS 5. KY-206 FRAME & COVER "STORM" SUPPLIED BY ICAST - FRAME TO BE CAST INTO TOP PHASE TOP FLANGE SIDE UP					
Rim: 854.04'						Rim to Invert: 7.67'		Slack: 0.04"		Sump: 0" Step Position:			
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset			
Invert 1													
Invert 2													
Invert 3													
Invert 4	850.87'	0°	20"	4" HDPE (perf pipe)	4.8"	Hole 8	8"	8"	10"	0"			
Invert 5	850.87'	180°	20"	4" HDPE (perf pipe)	4.8"	Hole 8	8"	8"	10"	0"			
Invert 6													
Invert 7													
Invert 8													

RIGHT-SIDE UP VIEW (int. dimensions)

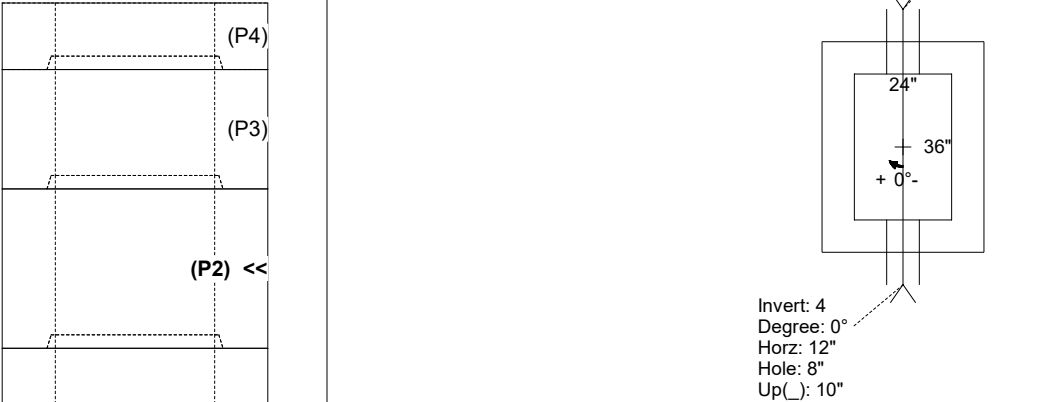

INSIDE WALL DIMENSIONS

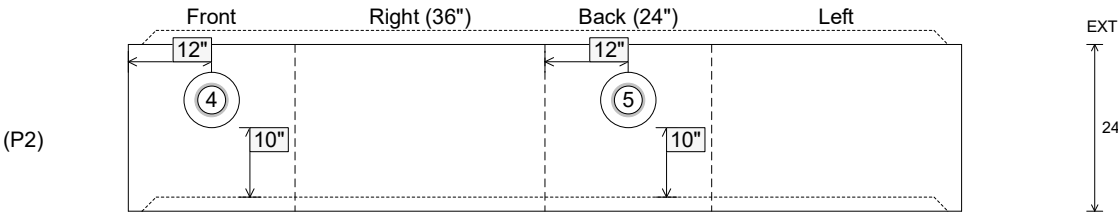

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 24" Height (Ext): 24"	Weight (Net): 2381 lb Volume (Net): 0.61cu.yd
----------------------------------	------------------------------------	--	--	--