
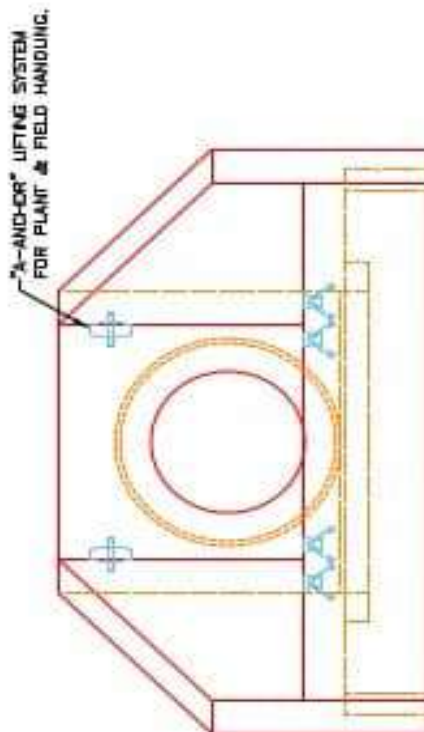
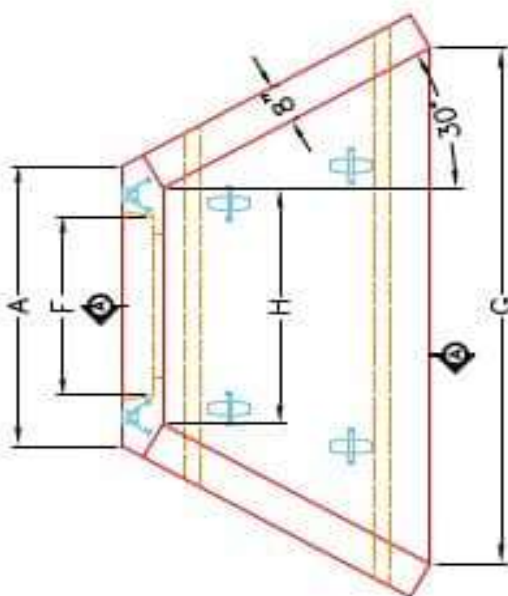


36" - PIPE CULVERT HEADWALL F/F

ISOMETRIC VIEW

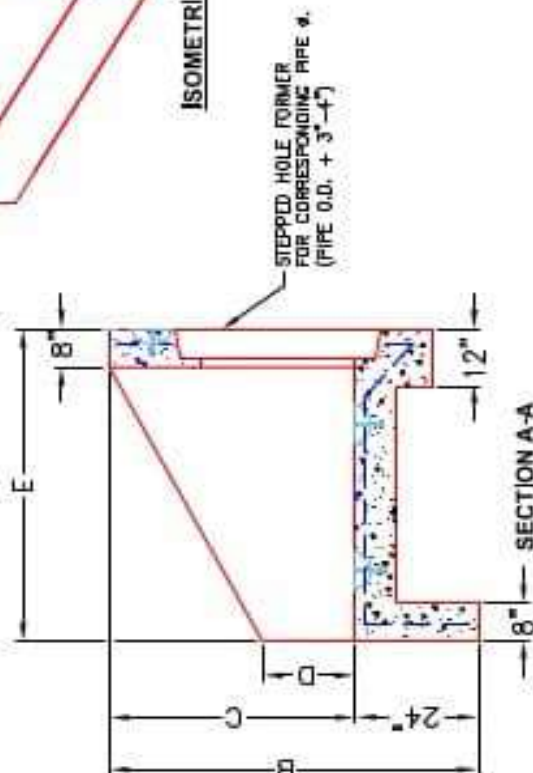

APPROVED FOR DESIGN ONLY		INSTRUCTION	
APPROVED SEE PERMIT FOR LOCATION, NOTES KATY DIV. OF CONSTRUCTION		1/20/2021 9:50 AM	
BY:		DATE:	
INFRASTRUCTURE PRECAST, INC. 601 WEST 7TH ST., BEAVER DAM, KY. 40005 PHONE: (502) 388-4200, FAX: (502) 388-4081			
KATY 30" - 80" PPE CULVERT HEADWALL			
ISSUING: MEL. RYAN PPE-18	DATE: 12-14-20		
RECHECKED: BEN J. H. RYAN, P.E.	ISSUED BY: M. TUCKER		
FOR: WWW.ICASTCON.COM	SCALE: N/A		

NOTES:

1. CONCRETE: KYTC APPROVED.
2. REINFORCING: #5 BAR @ 12" C/C E.W. - GRADE 60, (WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING RDH-110-02, RDH-210-D3 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
6. $\frac{3}{4}$ " CHAMFER ON ALL EXPOSED EDGES.
7. PERFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3" - 4".