



36" - PIPE CULVERT HEADWALL F/F

ISOMETRIC VIEW

STEPPED HOLE FORMER
FOR CORRESPONDING PIPE Ø.
(PIPE O.D. + 3"-4")

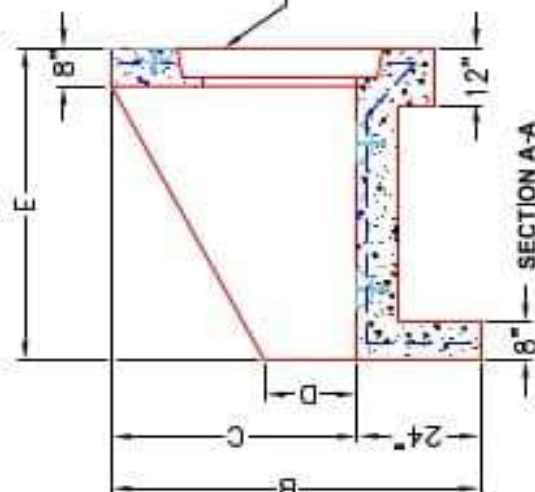


FRONT ELEVATION

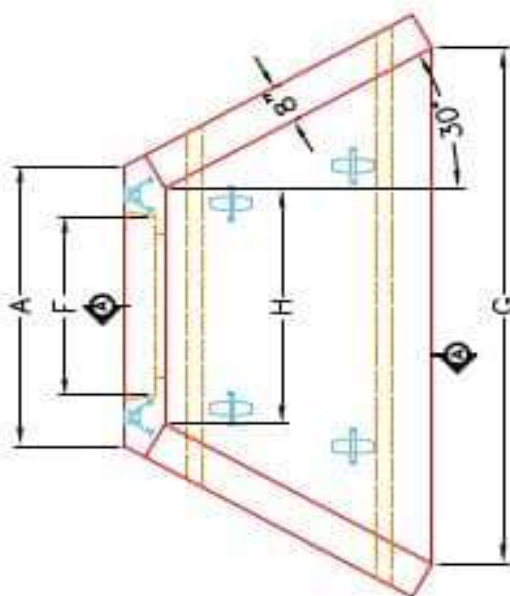

PLAN VIEW

"A-ANCHOR" LIFTING SYSTEM
FOR PLANT & FIELD HANDLING.

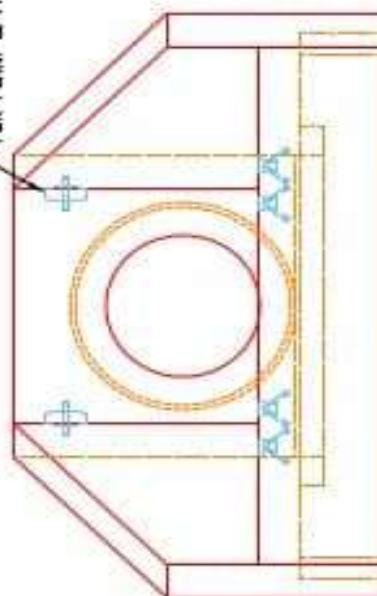

- ~NOTES:

1. CONCRETE: KYTC APPROVED.
2. REINFORCING: #5 BAR @ 12" C/C E.W.-GRADE 60,
(WITH 2" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. PIPE AND LIFTING ANCHOR POCKETS TO BE GROUTED
WITH KYTC APPROVED NON-SHRINK GROUT.
5. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING
RDH-110-02, RDH-210-D3 AND THE STANDARD SPECIFICATIONS FOR ROAD
AND BRIDGE CONSTRUCTION.
6. $\frac{3}{4}$ " CHAMFER ON ALL EXPOSED EDGES.
7. PERFORMED STEPPED HOLE SIZED AS PER O.D. OF PIPE + 3" - 4".

APPROVED FOR DESIGN ONLY

APPROVED

4/20/2021 9:50 am

10/10/10



INFRASTRUCTURE PRECAST, INC.
601 WEST 77TH ST., NEW YORK, NY 10023
PHONE: (212) 351-3300 FAX: (212) 351-3301

KYTC 30°-60° PIPE CULVERT HEADWALL

ISSN: 0013-7928

500	500
-----	-----

FOR INFO	CONTACT US
----------	------------

THIS DRAWING IS THE PROPERTY OF HERMASTRUCTURE PAPER, INC. ANY USE OR REPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.