

Job Name: 25-3193 - KYTC Kenton Co Call 328 (251320)
Job Location: Independence, KY
Contractor: Eaton Asphalt

Plant: 100
6/10/2026 11:59:15 AM

Tech: Jared - A
PC: J. Jarvis




Structure ID: ICAST LI9 (2)

P1 HWPC3453


53" x 34" - PIPE CULVERT HEADWALL (ELL.RCP) F/F

GENERAL NOTES:


- THIS DRAWING TO BE USED IN CONJUNCTION WITH KYTC STANDARD DRAWINGS RDH-110-02, RDH-220-02, RDH-350-03, & STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONSTRUCTION
- CONCRETE: 4,500 PSI AT 28 DAYS
- REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60)
- REINFORCING BARS TO BE TACK WELDED OR TIED
- 3/4" CHAMFER REQUIRED ON ALL EXPOSED EDGES
- PIPE & LIFTING ANCHOR POCKETS TO BE GROUTED BY CONTRACTOR
- WEIGHT: 16,225 LBS

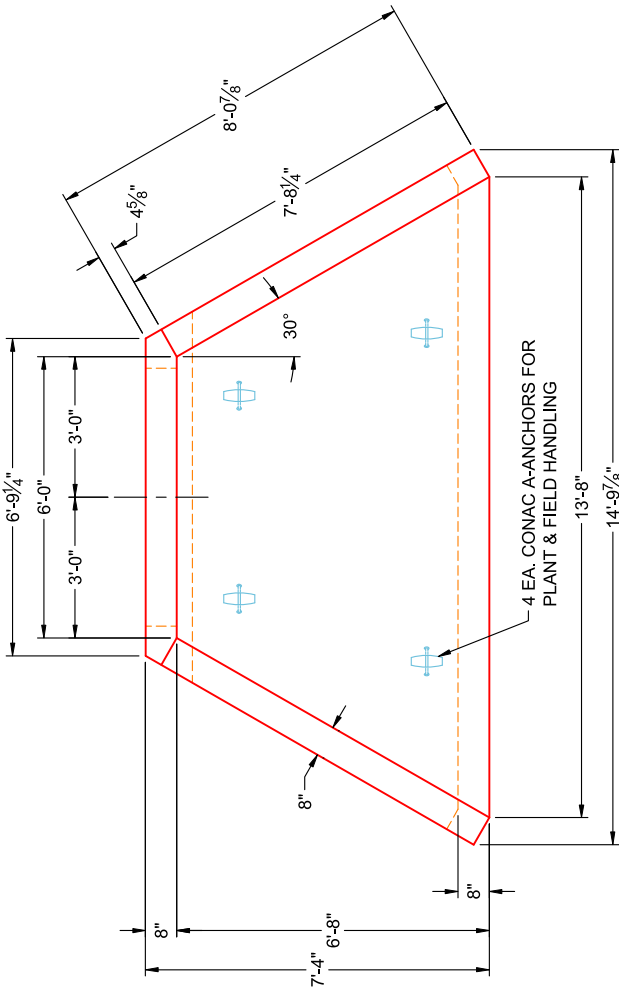

TOP VIEW

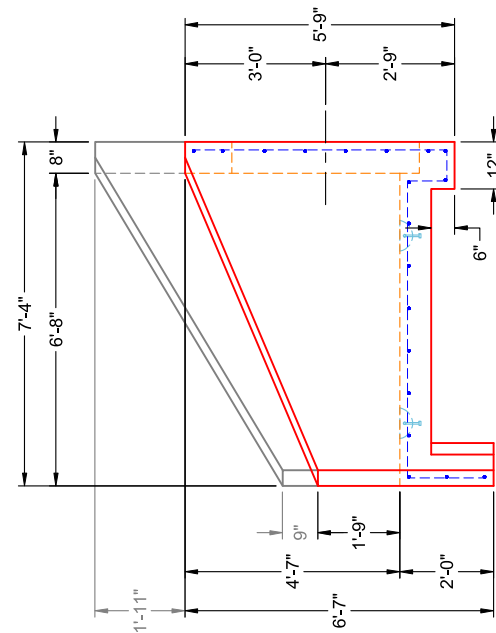

SIDE VIEW

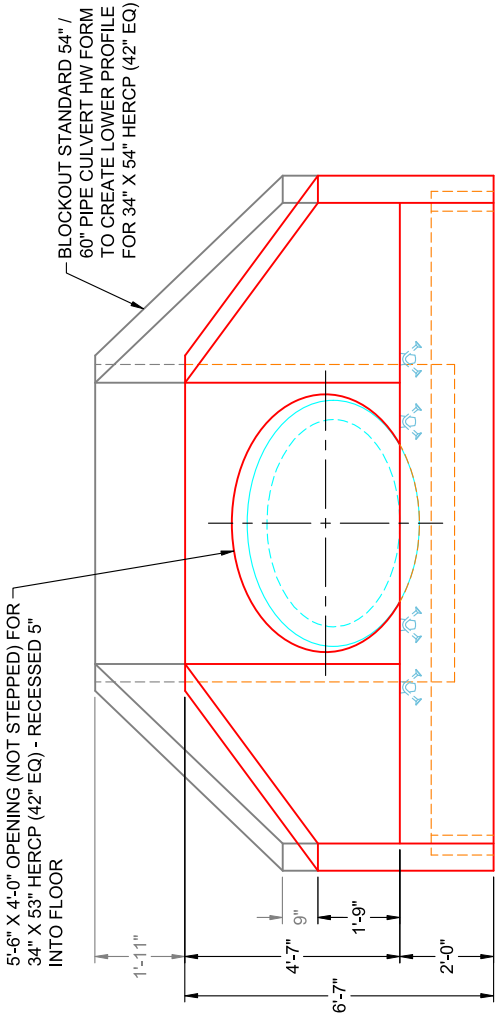

FRONT VIEW