

Job Name: 25-3241P2 - Buck Hills Subdivision
Job Location: Lawrenceburg, KY 40342
Contractor: Edmonson Plumbing & Heating Supply

Plant: 100

7/24/2026 12:44:46 PM

Tech: Jared - A

PC: C. Goff



Structure ID: CB 4

P2 MH060LD08-24X36RECT

MH FLAT TOP w/24"x36" Hole

P3) 24" x 36" - CASTING HEIGHT - 6"
P2) 60" - MH FLAT TOP w/24"x36" Hole - 8"
P1) 60" - MH BASE Custom Ht - 41"
1) CASTING - HOE 525 LV SET (F/G/H)
1) 60" - Conseal CS-102 1.00"
1) 24" x 36" - Conseal CS-102 1.00"
2) Hole - 38


Structure Total:

0 lb
2153 lb
5793 lb
442 lb
0 lb
0 lb
0 lb
0 lb

8389 lb


Structure Notes:

1. HOE 525 LV SET (F/G/H) PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
 - RISER/WALLS (As .18)
 - FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

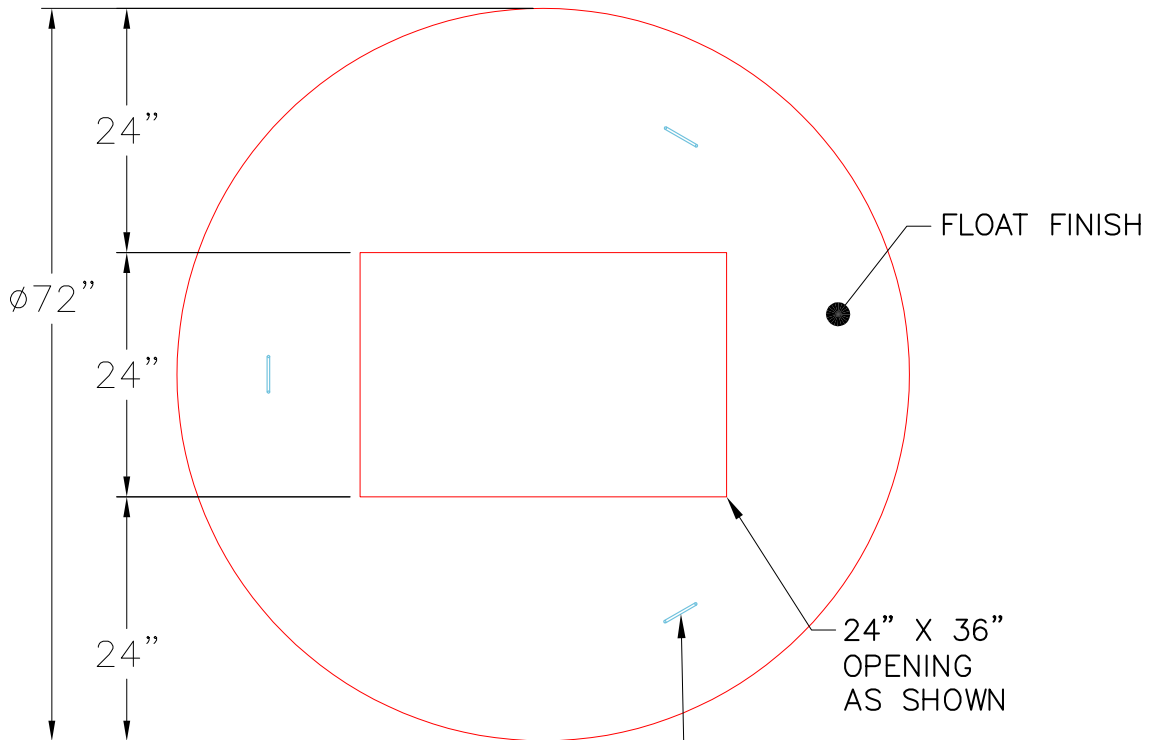

TOP VIEW

3 EA. CONAC .8 TON 8 $\frac{1}{16}$ " (6MM) WIRE ROPE ANCHORS REQUIRED.—MINIMUM.

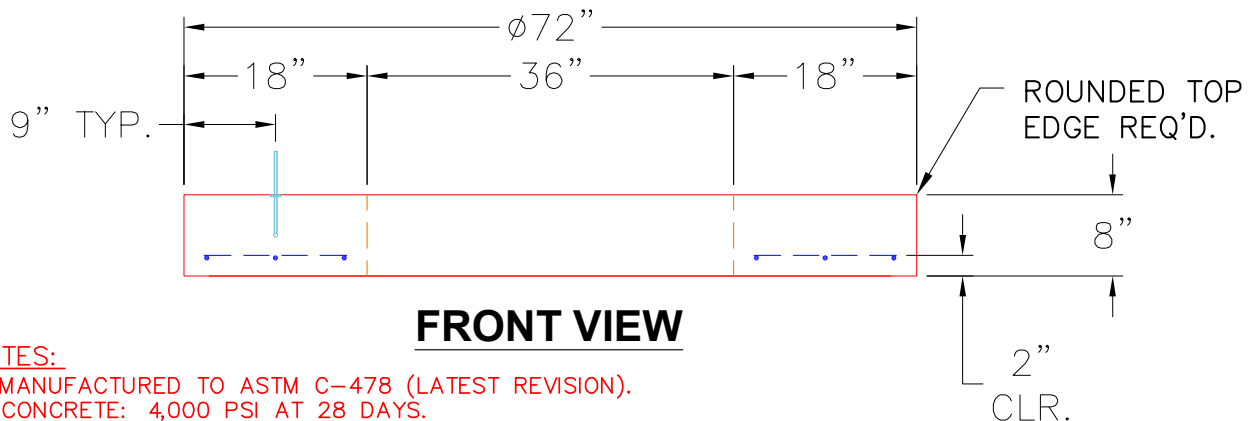

FRONT VIEW

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 2153 lb
Volume (Net): 0.55cu.yd