

Job Name: 25-3241P2 - Buck Hills Subdivision  
Job Location: Lawrenceburg, KY 40342  
Contractor: Edmonson Plumbing & Heating Supply

Plant: 100

7/24/2026 12:44:47 PM

Tech: Jared - A

PC: C. Goff



**Structure ID: CB 7**

**P2 MH048LD12-24X36RECT**

**MH FLAT TOP w/24"x36" Hole**



- P3) 24" x 36" - CASTING HEIGHT - 6"  
P2) 48" - MH FLAT TOP w/24"x36" Hole - 12"  
P1) 48" - MH BASE - 30"  
1) CASTING - HOE 525 LV SET (F/G/H)  
1) 48" - Conseal CS-102 1.00"  
1) 24" x 36" - Conseal CS-102 1.00"  
2) Hole - 20

Structure Total:

0 lb  
1300 lb  
3155 lb  
442 lb  
0 lb  
0 lb  
0 lb  
-----  
4897 lb

Structure Notes:

1. HOE 525 LV SET (F/G/H) PROVIDED BY ICAST.
2. PER ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. REINFORCING PER ASTM A615 (GRADE 60).
  - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
  - RISER/WALLS (As .12)
  - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

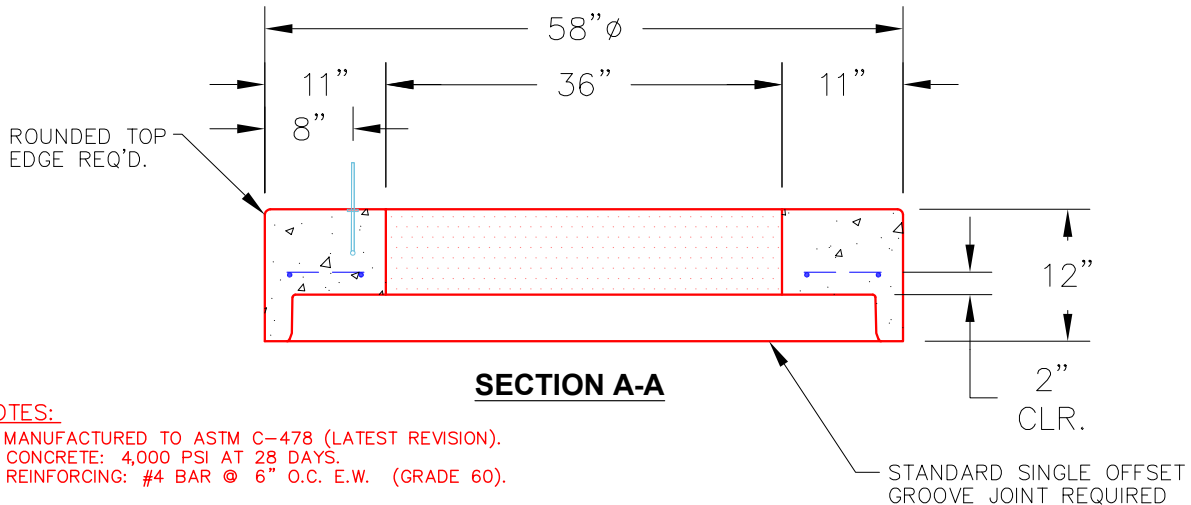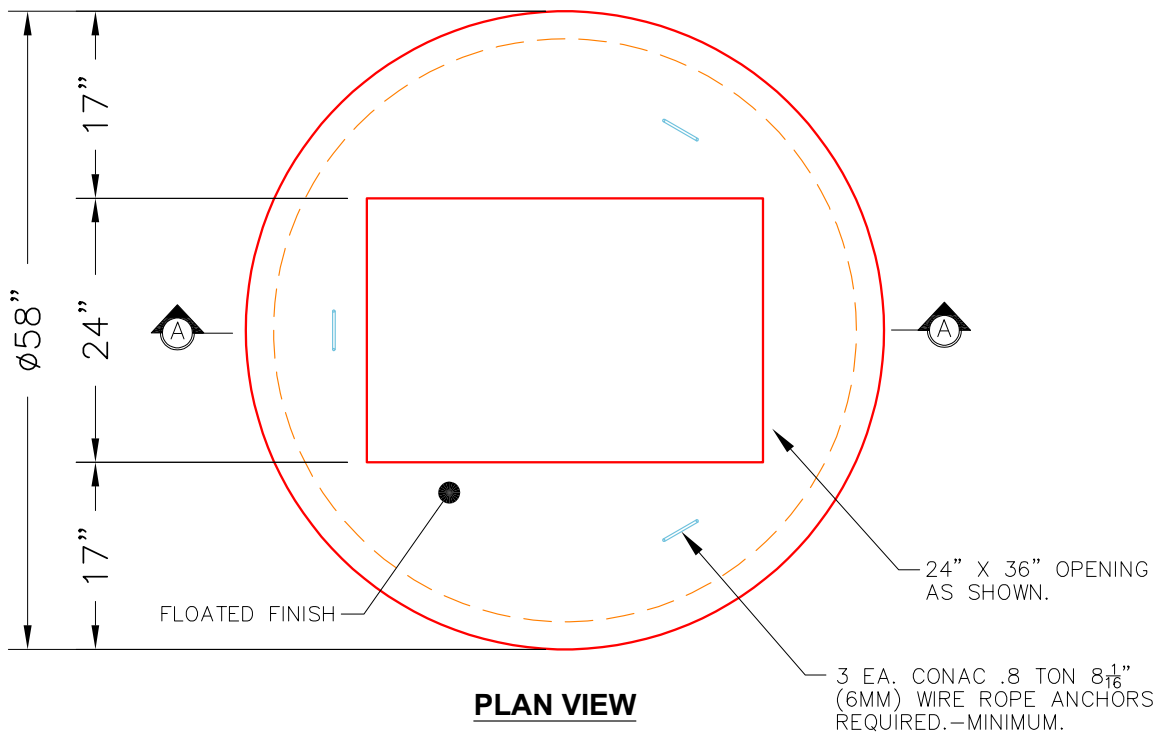

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):  
Coating (Ext):

Seam Up: Flat  
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1300 lb  
Volume (Net): 0.46cu.yd