Job Name: 25-3304 - Vuteq Warehouse Expansion Job Location: Georgetown, KY Contractor: Brown General Contractors	Plant: 100 3/19/2026 11:40:29 AM	Tech: Jared - A PC: Erica Bradley	

Structure ID: ST-8

P1 MH060BA66 MH BASE T/n

P5) 24" - CASTING HEIGHT - 7"	0 lb
P4) 48" - ECC CONE w/ 24" HOLE F/G - 36"	3000 lb
P3) 48" - MH RISER SPECIAL T/G - 54"	3575 lb
P2) 60" - MH Transition Slab 48" Hole T/G - 15"	2204 lb
P1) 60" - MH BASE T/n - 66"	8460 lb
1) CASTING - HOE MC-315 F/C Storm	258 lb
1) 60" - Conseal CS-102 1.00"	0 lb
2) 48" - Conseal CS-102 1.00"	0 lb
1) Hole - 40	0 lb
1) Hole - 24	0 lb
1) Hole - 34	0 lb
13) MH Step ML-10-TDS-NCR - 10"	0 lb
Structure Total:	17498 lb

Structure Notes:
1. PER ASTM C-478 SPECIFICATIONS
2. CONCRETE: 4,000 PSI AT 28 DAYS
3. REINFORCEMENT: PER ASTM A615
4. NO STORM INVERT
5. STEPS AT 106.5 DEGREES
6. HOE MC-315 FRAME & COVER "STORM" SUPPLIED BY ICAST

Rim: 921.6' Rim to Invert: 14.62' Slack: 0.94" Sump: 3.5" Step Position: 106.5°

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1	906.98'	0°	0"	30" RCP B WALL	37"	Hole 40	40"	43.784"	0"	0"
Invert 2										
Invert 3	907.48'	260°	163.375"	24" RCP B WALL	30"	Hole 34	34"	36.147"	6.5"	0"
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

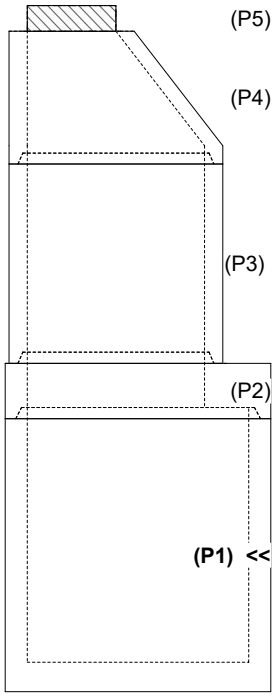

RIGHT-SIDE UP VIEW (int. dimensions)

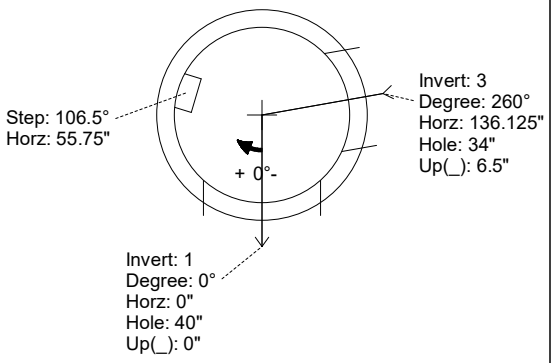

UPSIDE-DOWN VIEW (int. dimenions)

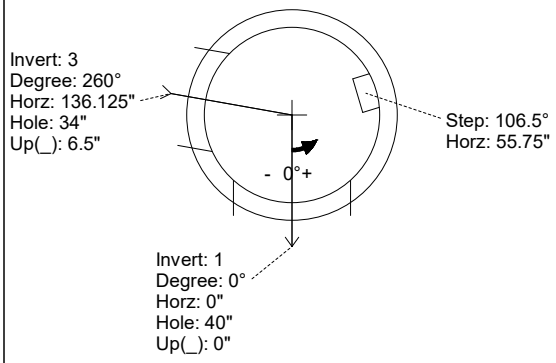

INSIDE WALL DIMENSIONS

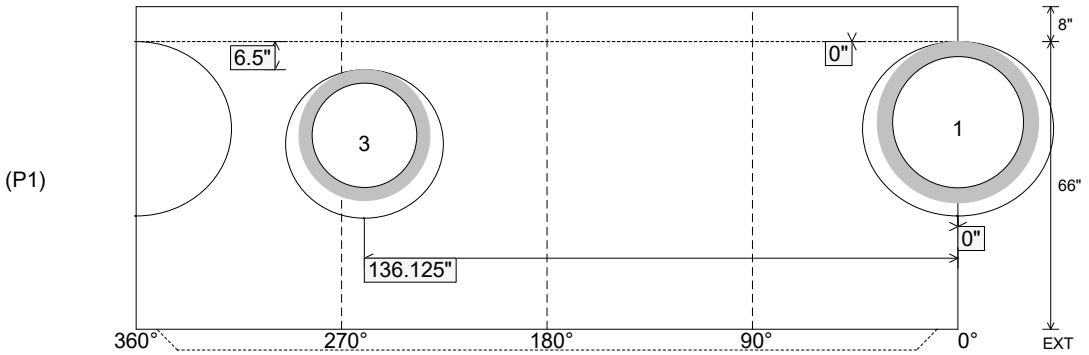

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 6" Floor Height: 8"	Height (Int): 66" Height (Ext): 74"	Weight (Net): 8460 lb Volume (Net): 2.16cu.yd