Job Name: 25-3334 Hickory Industrial Park Job Location: Hickory, KY Contractor: Crider Paving & Excavating	Plant: Beaver Dam 11/17/2025 11:38:15 AM	Tech: C.Russ PC: E.Bradley	

Structure ID: WET WELL

P3 MH072LD15S MH FLAT TOP w/42"x42" Hatch

P3)	72" - MH FLAT TOP w/42"x42" Hatch - 15"	5091 lb	
P2)	72" - MH RISER Custom Ht - 81"	11672 lb	
P1)	72" - MH BASE EF Cust. Ht. 12"F (14"EF =114"OD) - 84"	22523 lb	
1)	JOINT WRAP - 12" WD x 072" MAC WRAP	0 lb	
1)	This Structure Includes a Cast-in Item	0 lb	
1)	SECONDARY POUR	0 lb	
2)	72" - Conseal CS-102 1.00" (Double)	0 lb	
2)	Hole - 8	0 lb	
1)	PSX - 12-08 NYLO	8 lb	
1)	Hole - 4	0 lb	
407.91 SqFt)	Carboline Bitumastic 300M [EXT]	0 lb	
	Structure Total:	39294 lb	

Structure Notes:
1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. HALLIDAY HATCH 42"x42" BY OTHERS CAST INTO CENTER OF TOP SLAB.
4. REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB (As .31)#5 BAR @ 6" O.C.E.W
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.
5. STRUCTURE TO HAVE TWO EXTERIOR COATS OF CARBOLINE 300M.
6. LINKS SEALS FOR 4" DI PIPE BY OTHERS

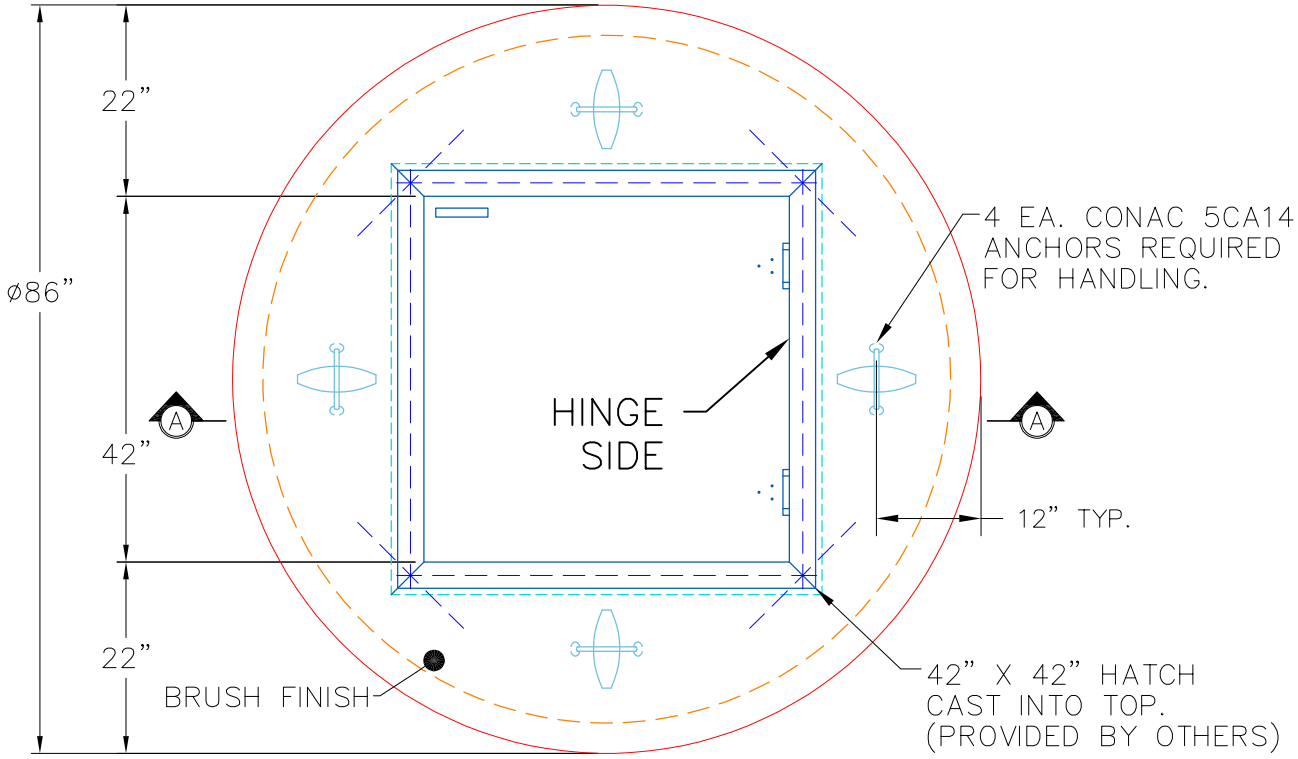

PLAN VIEW

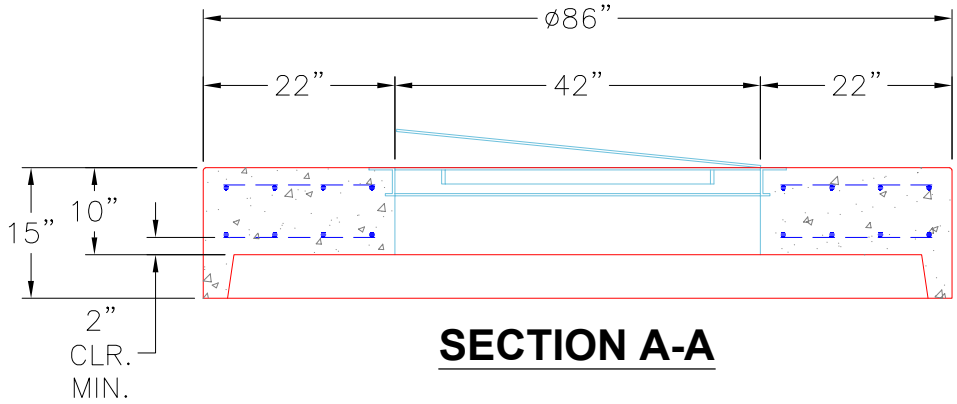

SECTION A-A

Coating (Int): Coating (Ext): Carboline Bitumastic 300M	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 7"	Height (Ext): 15"	Weight (Net): 5091 lb Volume (Net): 1.3cu.yd