

Contractor: Core & Main LP (Lou)

TECH: J. Horsley

Plant: 100



Size: 60" x 60"

Rim to Invert: 5.67'

Floor Height: 8"

Slack: 0.04"


REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
- WALLS (As .31) #5 BARS AT 8" C.C.E.W.
- FLOOR (As .31) #5 BARS AT 8" C.C.E.W.

5) MH Step ML-10-TDS-NCR - 10"



0 lb

Structure Total: 16849 lb

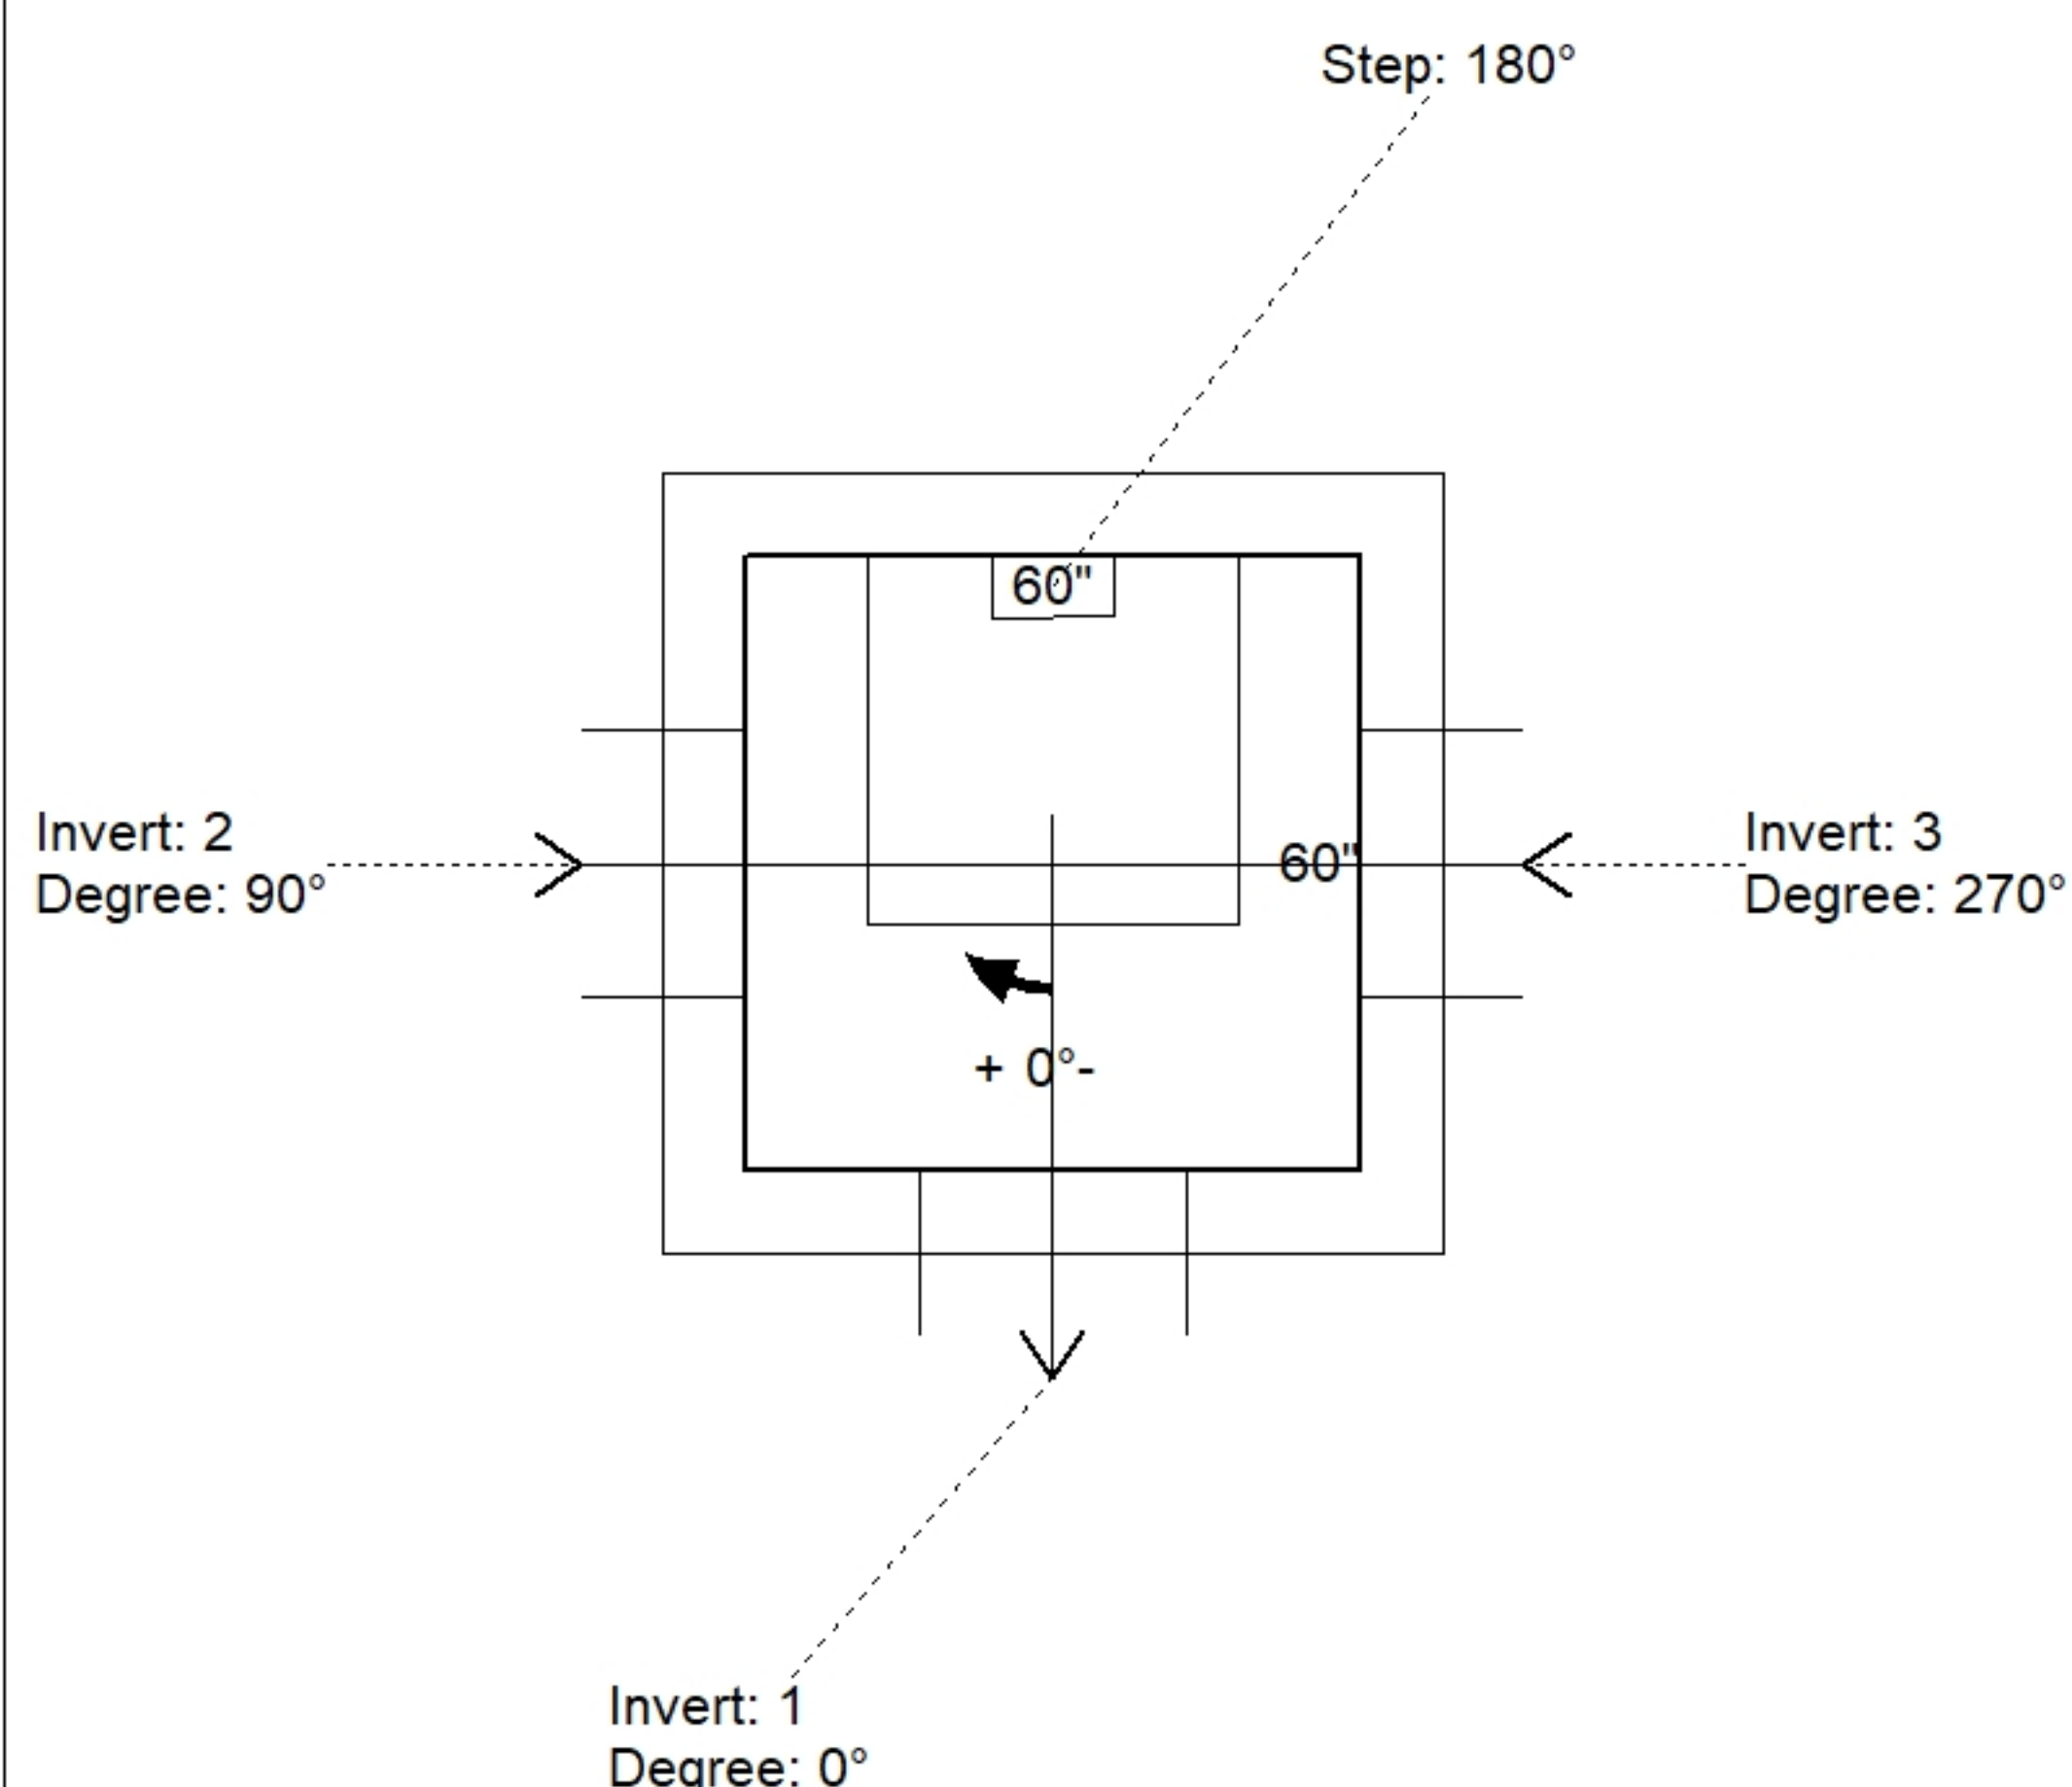

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up (')	Ref
Rim	5.67'							
Reducer								
Invert 1	0'	0°	18" RCP B WALL	23"	26"	Hole 26	-2.5"	P1
Invert 2	0'	90°	18" RCP B WALL	23"	26"	Hole 26	-2.5"	P1
Invert 3	0'	270°	18" RCP B WALL	23"	26"	Hole 26	-2.5"	P1
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

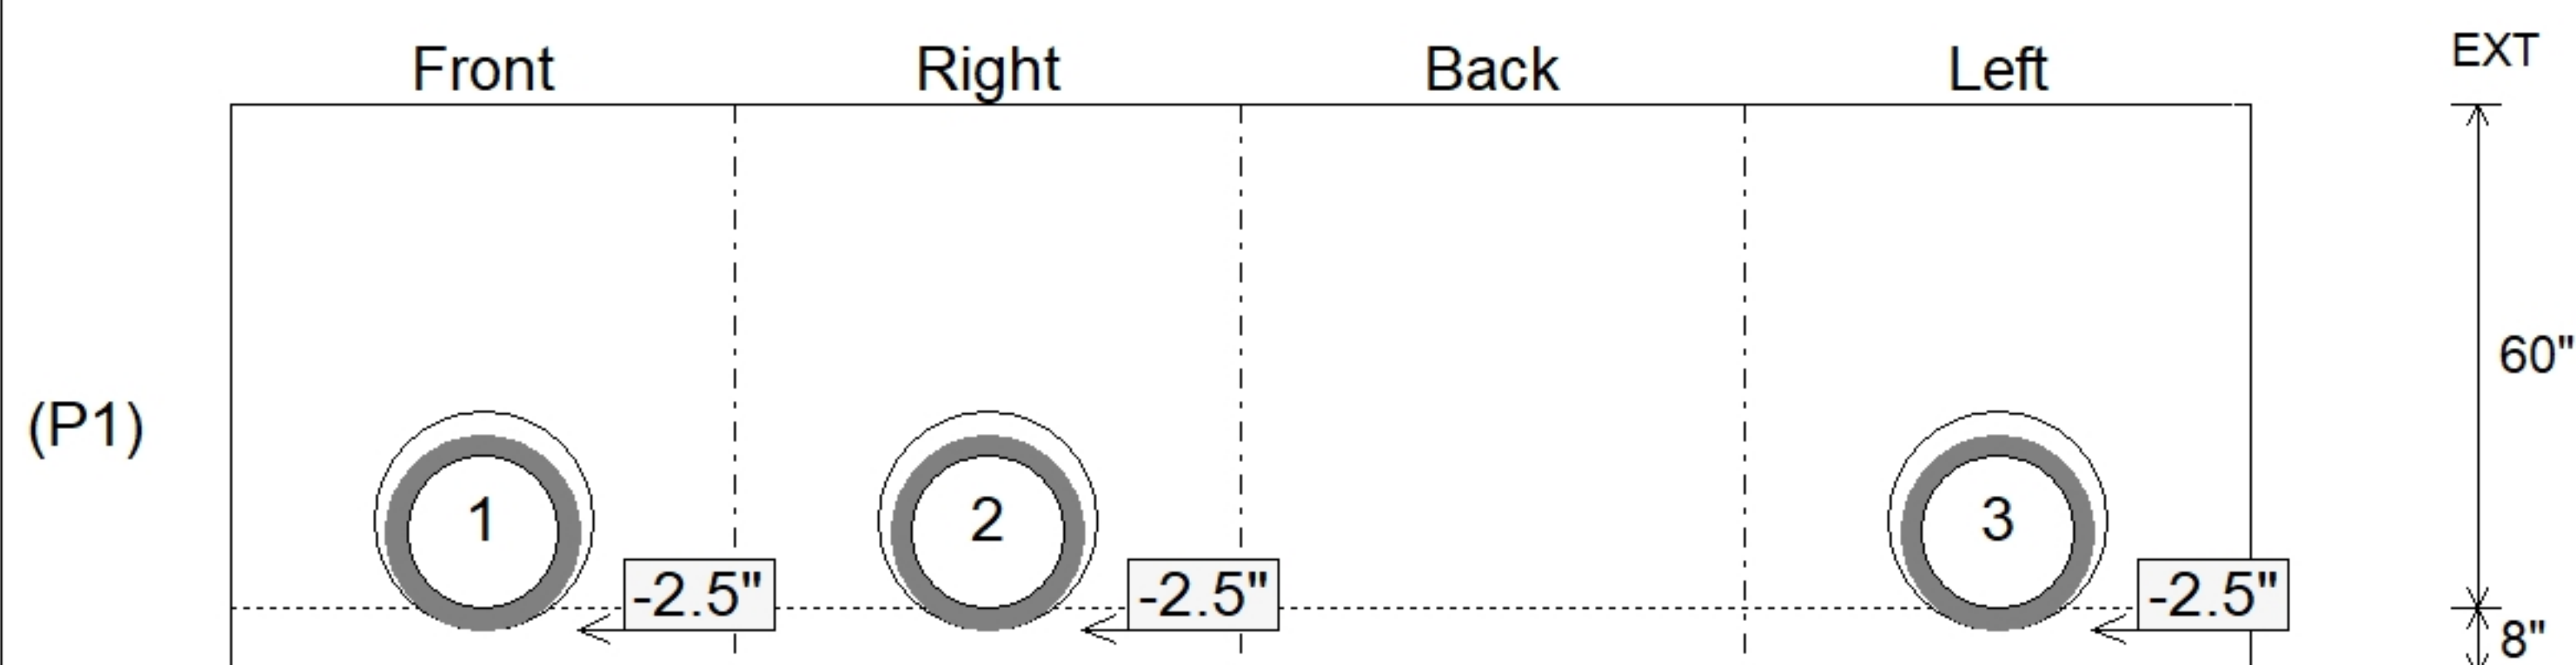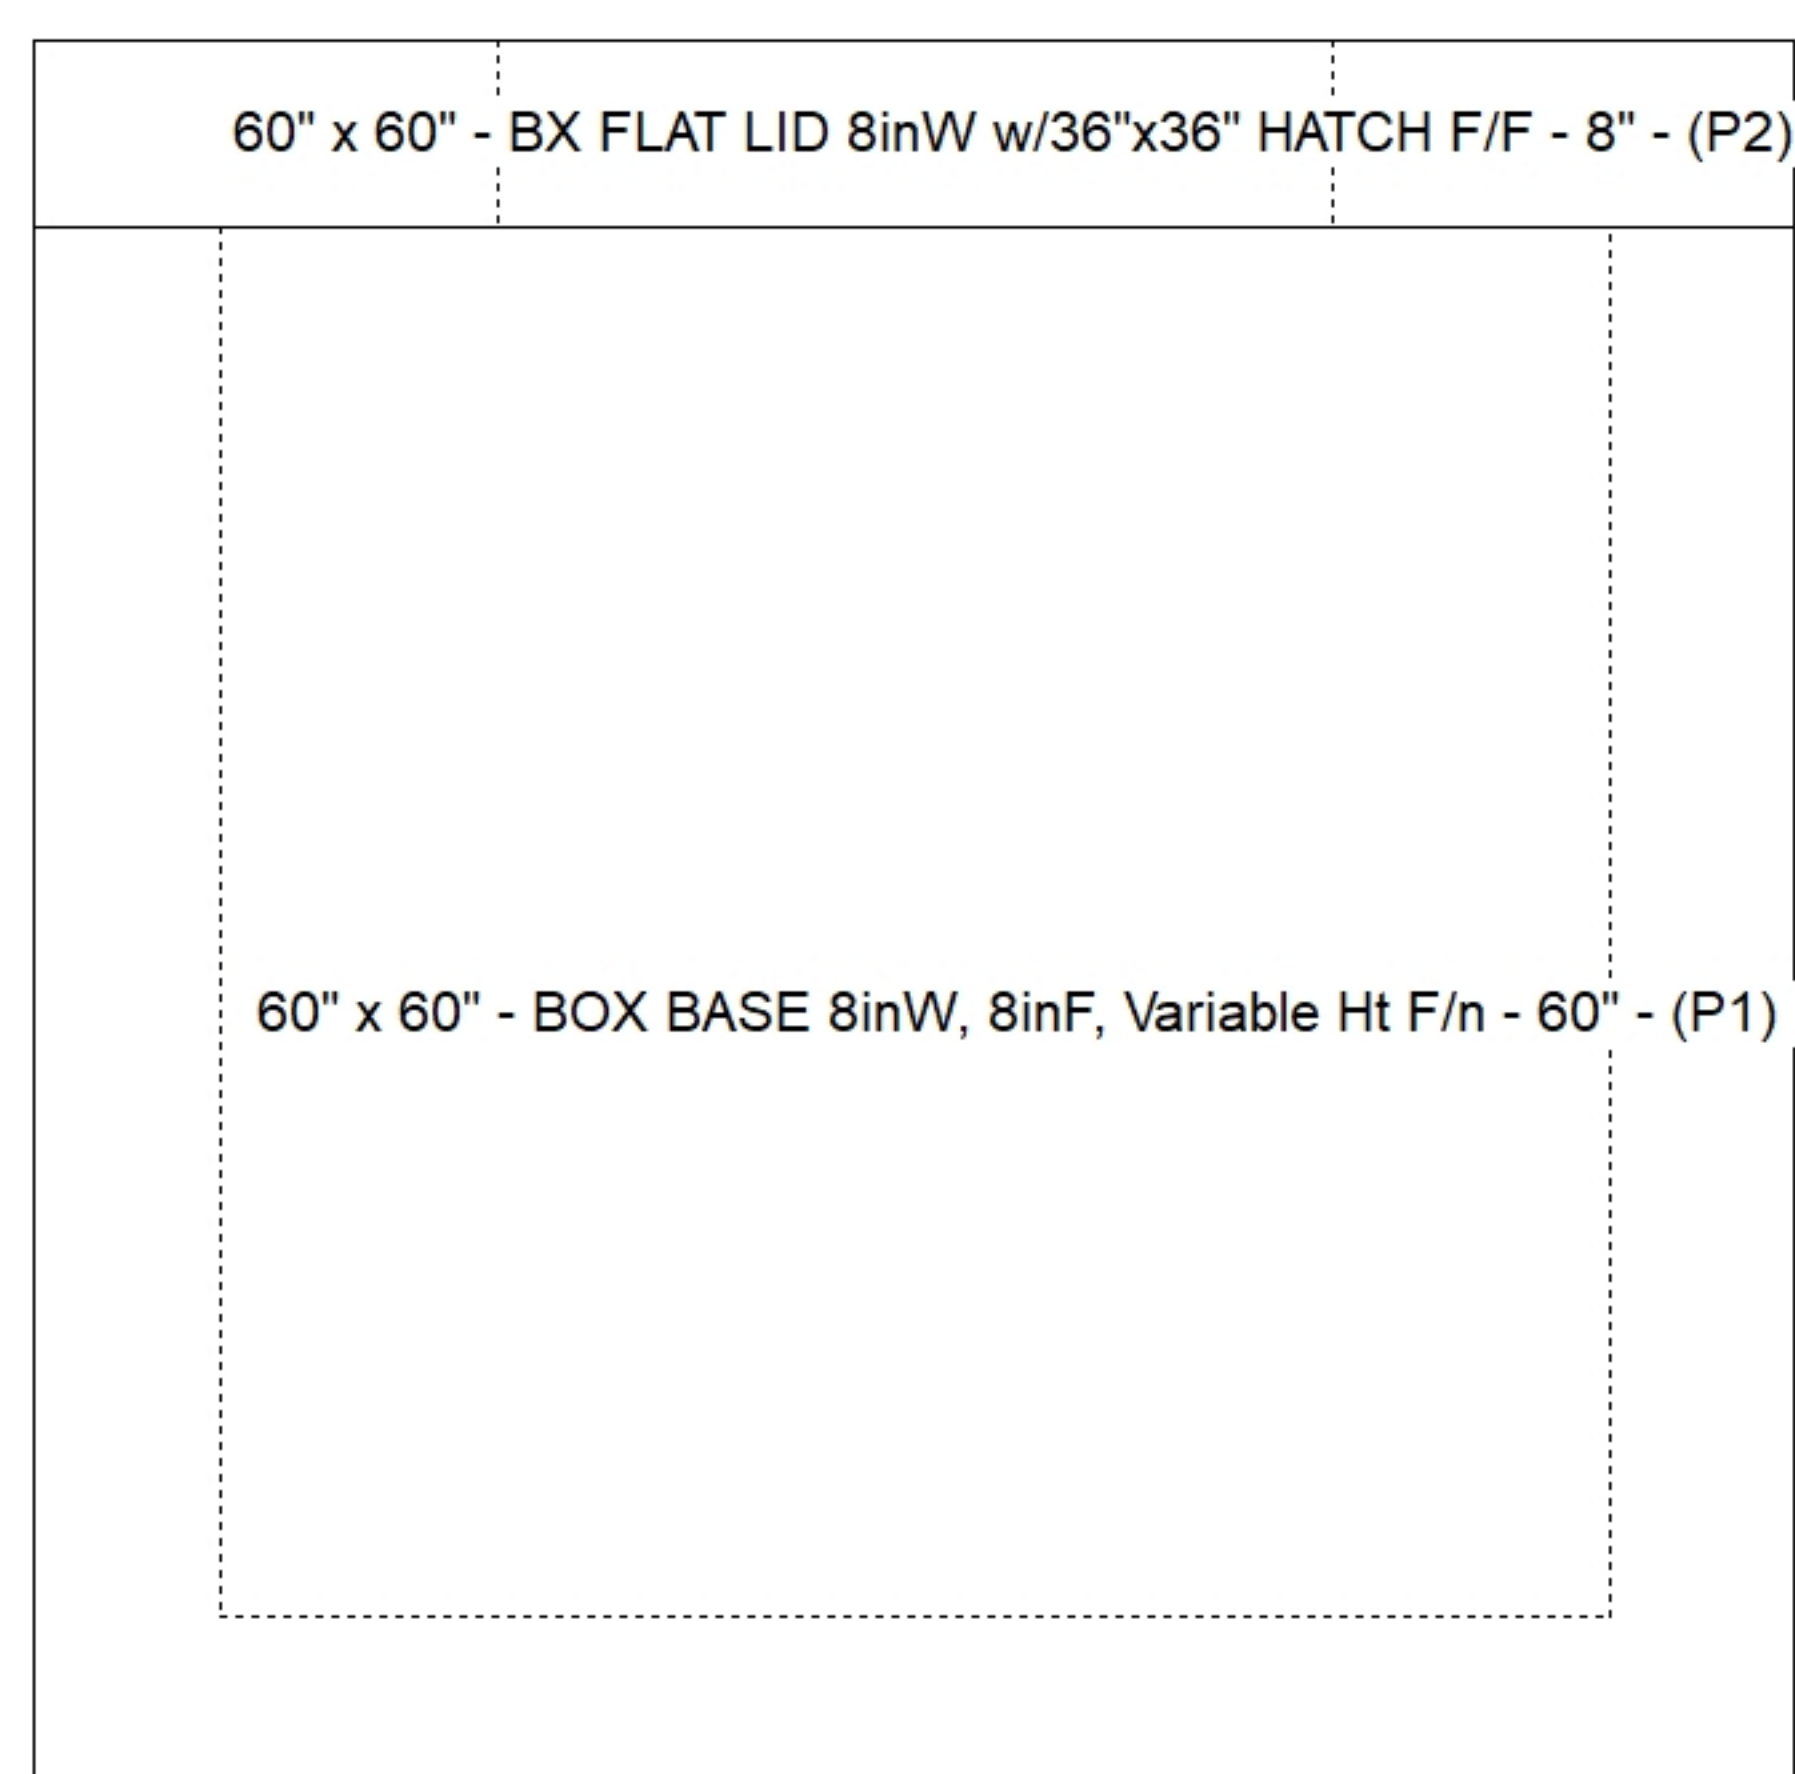

SUBMITTAL
APPROVED BY: