





Structure ID: HW 5



P1 HWSF12

12" - SLOPED & FLARED HEADWALL F/F

DIMENSIONS										
PIPE Ø	A	B	C	D	E	F	G	H	I	WEIGHT
12"	2'-8"	2'-0"	2'-0"	1'-8"	4'-0"	3"	2'	1'-8"	4'-8"	3,161 LBS.

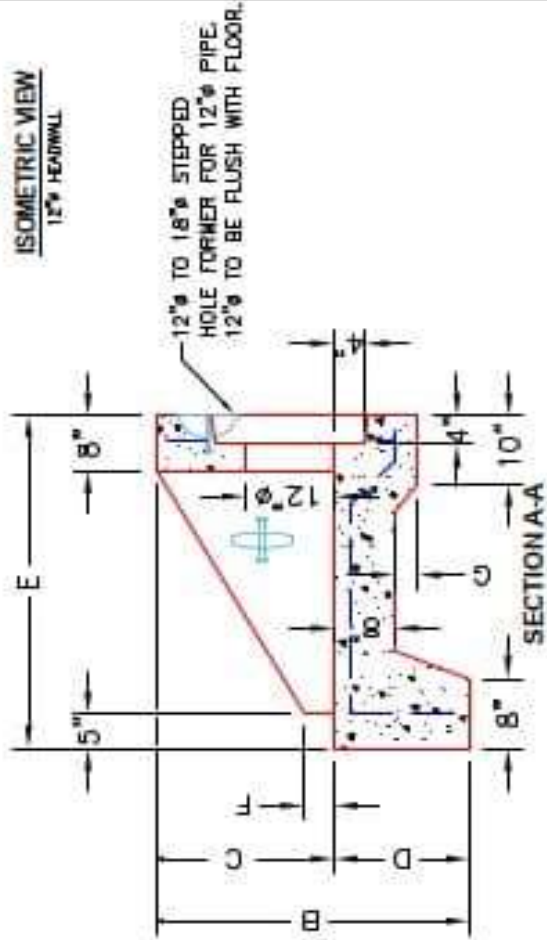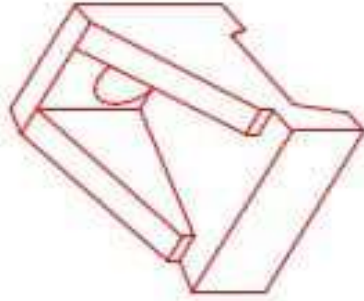

"A"-ANCHOR LIFTING SYSTEM FOR PLANT & FIELD HANDLING.

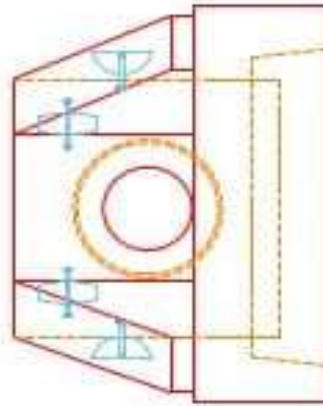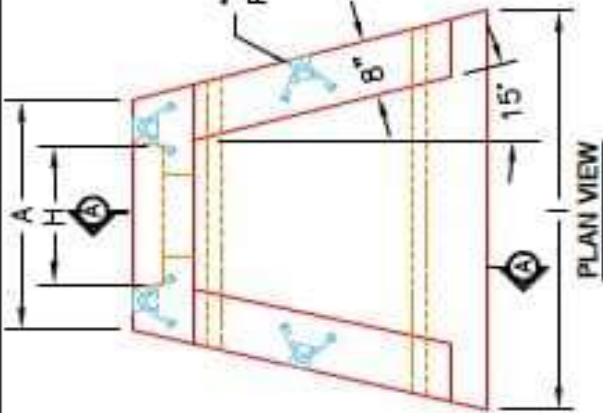

NOTES:

1. CONCRETE: 4500 PS @ 28 DAYS.
2. REINFORCING: #4 BAR @ 12" C/C E-W - GRADE 60, (WITH 3" CONCRETE COVER MINIMUM)
3. REINFORCING BARS TO BE TACK WELDED OR TIED.
4. DRAWING TO BE USED IN CONJUNCTION WITH KYTC STD. DRAWING R01H-020-03 AND THE STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION.
5. CHAMFER ON ALL EXPOSED EDGES.

PRODUCT I.D.: HWSF12	DESCRIPTION: KYTC 12" SLOPED & FLARED HEADWALL
PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: STOCK
PLANT: BEAVER DAM, KY.	PROJECT: STOCK INVENTORY
WEIGHT: 3,161 LBS.	STRUCTURE ID: N/A
TOP SECTION JOINT: N/A	QUOTE/SALES ORDER NO: N/A
BASE SECTION JOINT: N/A	CHECK: J.H. ROSS, PE DRAWING: N. RICHARDS
QC CHECK INITIALS:	DATE: 09/15/22 SCALE: NTS FIG. 1 of 1

PRODUCTION WORK ORDER	
QUALITY CONTROL CHECKLIST	
<input type="checkbox"/>	ALL DIMENSIONS CORRECT.
<input type="checkbox"/>	LIFTERS INSTALLED.
<input type="checkbox"/>	STEPPED HF CORRECT SIZE.
<input type="checkbox"/>	REINFORCING CORRECT.
<input type="checkbox"/>	DISPATCHER BLOCK INSTALLED.
<input type="checkbox"/>	EDGES CHAMFERED.
<input type="checkbox"/>	ALL PATCHWORK ACCEPTABLE.

