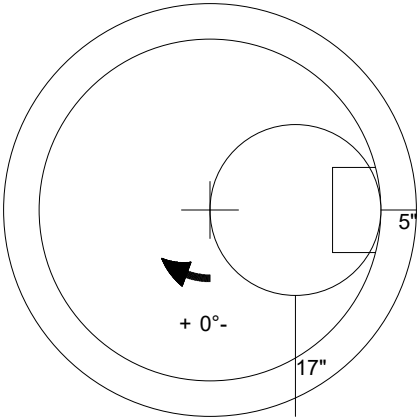



Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements		Plant: 100	Tech: Jared - F	
Job Location: Louisville, KY 40208		4/30/2026 1:22:56 PM	PC: J. Jarvis	
Contractor: Louisville Paving and Construction				
Structure ID: S104				
P2 MH048CN30		ECC CONE w/ 24" HOLE F/G		
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE F/G - 30" P1) 48" - MH BASE Custom Ht T/n - 43" 1) CASTING - HOE MC-420 F/C Storm 1) 48" - Conseal CS-102 1.00" 1) Hole - 24 1) Hole - 12 1) Hole - 16 7) MH Step ML-10-TDS-NCR - 10"		0 lb 2050 lb 4003 lb 340 lb 0 lb 0 lb 0 lb 0 lb 0 lb ----- Structure Total: 6393 lb	<u>Structure Notes:</u> 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE MC-420 F/C STORM) REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.	
				
 48" - ECC CONE w/ 24" HOLE F/G - 30" - (P2)				
Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 5"	Height (Ext): 30"	Weight (Net): 2050 lb Volume (Net): 0.41cu.yd