



Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements Job Location: Louisville, KY 40208 Contractor: Louisville Paving and Construction				Plant: 100 4/30/2026 1:21:45 PM		Tech: Jared - F PC: J. Jarvis				
Structure ID: S114										
P1 BX3636-08BAVF				BOX BASE 8inW, 8inF, Variable Ht F/n						
P2) 36" x 36" - CASTING HEIGHT - 3" P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 32" 1) CASTING - HOE 595 F/G 1) 36" x 36" - Conseal CS-102 1.00" 1) Hole - 16 1) Hole - 10				0 lb 5408 lb 376 lb 0 lb 0 lb 0 lb ----- Structure Total: 5784 lb		Structure Notes: 1. PER ASTM C913 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. NO STEPS AND NO INVERT CHANNEL. 4. CASTING BY ICAST (HOE 595 F/G) REINFORCING PER ASTM A615 (GRADE 60). - WALLS (As .12) #5 BARS AT 12" C.C.E.W. - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.				
Rim: 454.42' Rim to Invert: 2.96' Slack: 0.52" Sump: 0" Step Position:										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	451.46'	0°	26"	12" HDPE	14.5"	Hole 16	16"	16"	-1.25"	0"
Invert 2	451.79'	270°	26"	8" PVC SDR26	8.5"	Hole 10	10"	10"	3.75"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

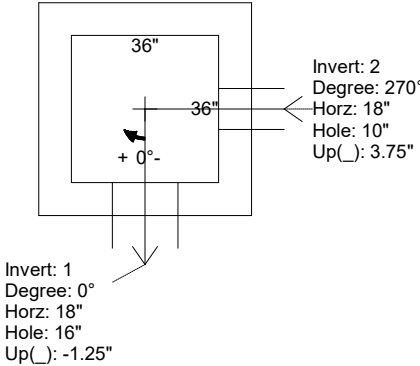

UPSIDE-DOWN VIEW (int. dimensions)

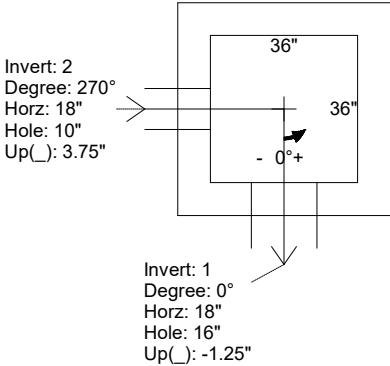

INSIDE WALL DIMENSIONS

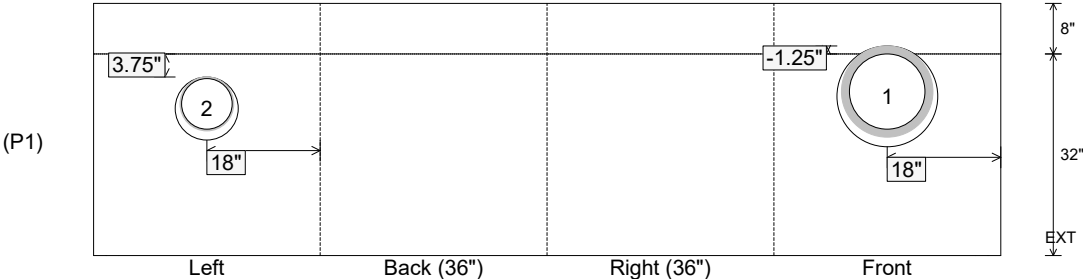

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 32" Height (Ext): 40"	Weight (Net): 5408 lb Volume (Net): 1.38cu.yd
----------------------------------	-------------------------------	--	--	--