

Job Name: 25-3452 - Churchill Downs Skye Terrace Improvements
Job Location: Louisville, KY 40208
Contractor: Louisville Paving and Construction

Plant: 100

4/30/2026 1:23:02 PM

Tech: Jared - F

PC: J. Jarvis



Structure ID: S210

P3 MH060LD13-32SQ

MH FLAT TOP w/32"x32" Hole F/G

- P4) 32" x 32" - CASTING HEIGHT - 3"
P3) 60" - MH FLAT TOP w/32"x32" Hole F/G - 13"
P2) 60" - MH RISER T/G - 12"
P1) 60" - MH BASE Custom Ht T/n - 69"
1) CASTING - HOE 595 F/G
2) 60" - Con Seal CS-102 1.00"
1) 32" x 32" - Con Seal CS-102 1.00"
2) Hole - 30
2) Hole - 16

Structure Total:

0 lb
2369 lb
1253 lb
8992 lb
376 lb
0 lb
0 lb
0 lb
0 lb


12990 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING BY ICAST (HOE 595 F/G)

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .18)
- FLOOR (As .37) #5 BARS AT 10" C.C.E.W.

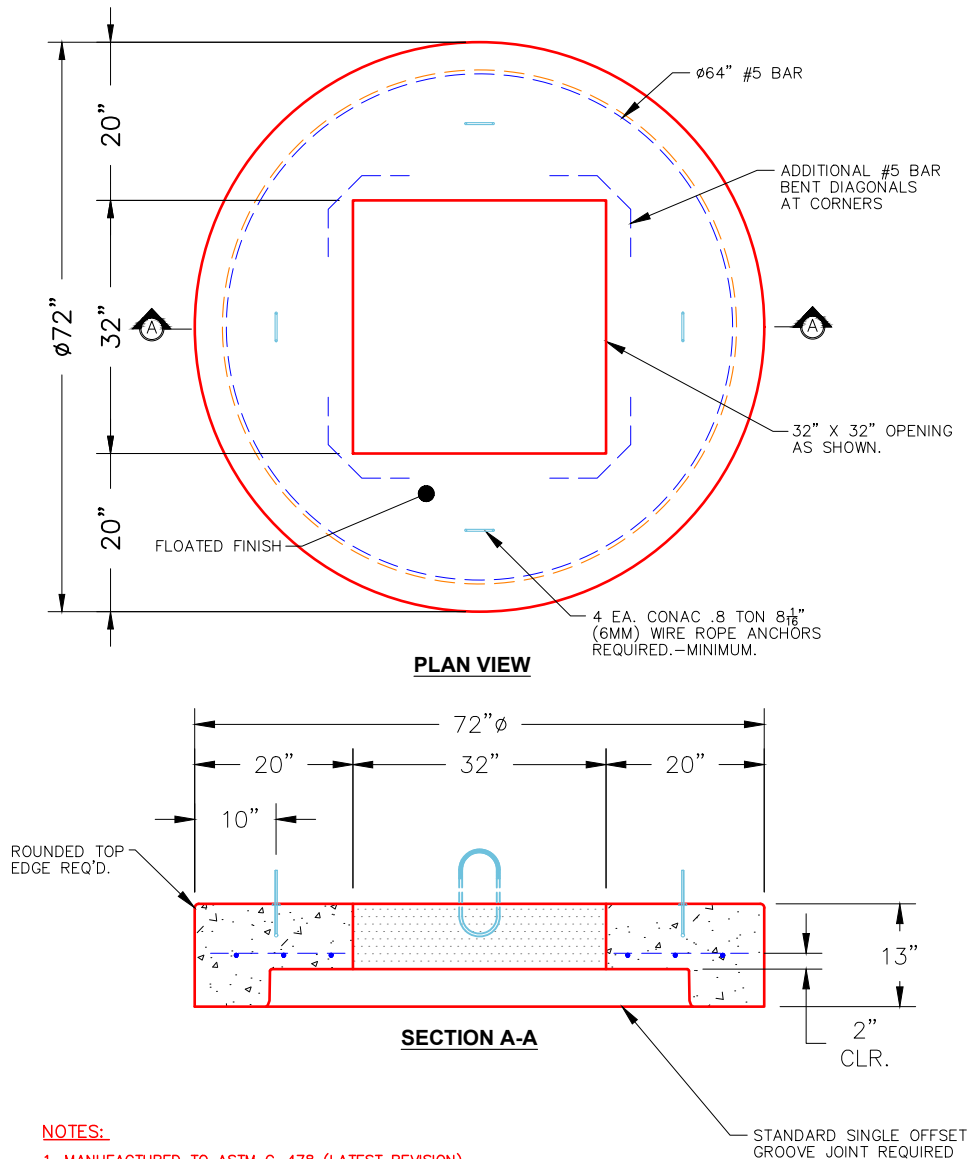

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 6"

Height (Ext): 13"

Weight (Net): 2369 lb
Volume (Net): 0.6cu.yd