

Job Name: 25-3470P9 CCHS Precast Building
Job Location: 5185 Fort Campbell BLVD
Contractor: Christian County Board of Education C/O A&K Construction

Plant: Beaver Dam
9/29/2026 2:19:00 PM

Tech: J. Coppage
PC: E. Bradley




Structure ID: Assembly - Assembly

P1 PSASSEMBLY ASSEMBLY REQUIRED - - 0"

PREPARED FOR:



PRODUCTION DRAWINGS

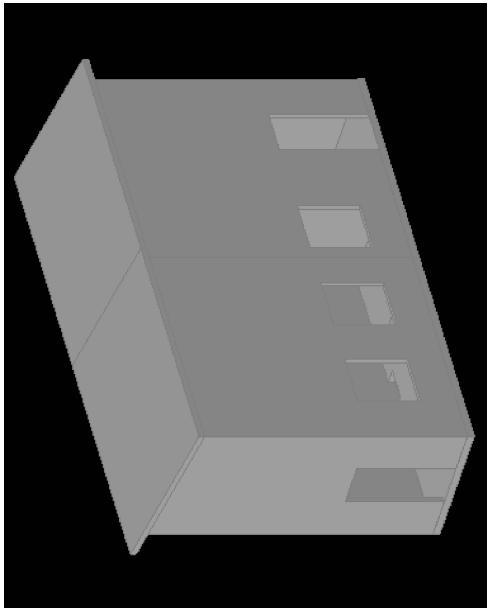

BUILDING COLORS

MESSAGE CENTER
BUILDING FINISH WALLS: EASI-BRICK
ROOF: BROOM FINISH
BUILDING STAIN COLOR(1):7001 MARSHMALLOW
BUILDING STAIN COLOR(2):6108 LATTE
BUILDING STAIN ROOF-TED

PRODUCTION DRAWING INDEX

DWG	SHEET TITLE	REV.	NO.	DATE
P-01	COVERSHEET			08.19.26
P-02	STRESSING PROCEDURES			08.19.26
P-03	SHIPPING/HANDLING GUIDE			08.19.26
FP-01	FLOOR SLAB TICKET			08.19.26
FP-02	FLOOR WALL TICKET			08.19.26
WP-01	SOUTH WALL TICKET			08.19.26
WP-02	SOUTH WALL TICKET			08.19.26
WP-07	SOUTH WALL TICKET			08.19.26
WP-08	SOUTH WALL TICKET			08.19.26
WP-03	NORTH WALL TICKET			08.19.26
WP-04	NORTH WALL TICKET			08.19.26
WP-09	NORTH WALL TICKET			08.19.26
WP-10	NORTH WALL TICKET			08.19.26

LEGEND

(X) DENOTES SECTION/DETAIL NO.

ABBREVIATIONS:

- CLR = CLEAR
- P.D. = PANEL DIMENSION
- R.O. = ROUGH OPENING
- TYP. = TYPICAL
- B.I.F. = BOTTOM IN FORM
- T.I.F. = TOP IN FORM
- S.I.F. = SIDE IN FORM
- C.O. = CUT OUT (MESH)

- GENERAL NOTES:
- THE DOCUMENTS CONTAINED IN THIS PACKAGE ARE TO BE USED BY THE LICENSED PRODUCER FOR PRODUCTION ONLY AND NOT INTENDED TO BE SUBMITTED FOR APPROVAL BY THE CLIENT UNLESS SPECIAL CIRCUMSTANCES DICTATE
 - EACH LICENSED PRODUCER HAS AN OBLIGATION TO PROTECT THE MEANS AND METHODS CONTAINED HEREIN BY NOT MAKING THESE DETAILS AVAILABLE TO CLIENTS UNLESS APPROVED BY EASI-SET
 - THIS PACKAGE CONTAINS INFORMATION THAT IS PRIVILEGED AND CONFIDENTIAL AND IS NOT INTENDED TO REPLACE THE "DUE DILIGENCE" REQUIRED OF THE LICENSED CONTRACT HOLDER.
 - REINFORCEMENT SUBSTITUTION IS PERMITTED AT THE PRODUCERS DISCRETION PROVIDED EQUIVALENT STEEL IS MAINTAINED.
 - REINFORCEMENT CLEARANCES SHOWN ARE FOR LINER FINISH. OTHER FINISHES MAY REQUIRE DIFFERENT CLEARANCES.
 - THE SHOP TICKETS PROVIDED SHOW THE EXTERIOR FINISH CAST FACE DOWN. (EXCEPT THE INTERNAL WALL AND TOP ROOFS)
 - TO ENSURE SQUARENESS, CHECK DIAGONALS.
 - THERE ARE NO IMPLIED WARRANTIES OR GUARANTEES.

PRODUCER: ICAST

PROJECT: CHRISTIAN COUNTY HIGH SCHOOL ATHLETIC COMPLEX

CUSTOMER: CHRISTIAN COUNTY SCHOOLS

DRAWING PACKAGE NUMBER: 103422C
BASEBALL/SOFTBALL PRESSBOX BUILDING
CHRISTIAN COUNTY PUBLIC SCHOOLS
5185 FORT CAMPBELL BOULEVARD
HOPKINSVILLE, KY 42240

BILL OF MATERIALS-MASTER LIST

MARK NO.	DESCRIPTION	QTY
P101L	1"x1 1/2" F-63 COIL INSERT (ELEC)	132
P103G	2-TON TECH ERECTION ANCHOR	66
P104P	U-5 POST TENSION ANCHOR	26
P9000P	3'-0"x7'-0" SINGL DOOR 4" FRAME	3
P9000G	1"Ø E.M.T. TUBE OF VARIOUS LENGTHS	14
P102G	ESW P-4 LIFTING ANGLE (GALV.)	32
P106G	2-TON PLATE ANCHOR	24
P201G	4"x4"x3/8"W/(2) 3/8"Ø X 1 1/2" H.A.S. W/ 1'-4" BENT REBAR (GALVANIZED)	106
P202G	4"x4"x3/8"W/(2) 3/8"Ø X 1 1/2" H.A.S. W/ 1'-4" BENT REBAR (GALVANIZED)	3
P203G	4"x4"x3/8"W/(2) 3/8"Ø X 1 1/2" H.A.S. W/ 1'-4" BENT REBAR (GALVANIZED)	3

L = ELECTROPLATED FINISH
P = PLAN (MANUFACTURE) FINISH
S = STAINLESS STEEL
G = GALVANIZED FINISH
R = RED OCEAN FINISH

Tech:	J. Coppage
PC:	E. Bradley





P1 PSASSEMBLY ASSEMBLY REQUIRED - - 0"

P1 PSASSEMBLY

[illegible]

11. Observe site rules pertaining to frequency of gauge calibration.

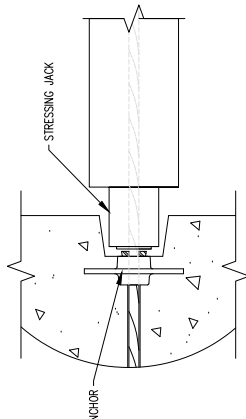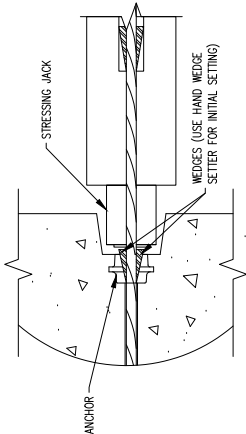

Tech:	J. Coppage
PC:	E. Bradley



P1 PSASSEMBLY ASSEMBLY REQUIRED - - 0"

P1 PSASSEMBLY

