



25-3470  
CCHS Precast Buildings  
Right Hand Dugout  
ID - CVW  
Wall - WP-04  
Weight - 7,525  
1 Required

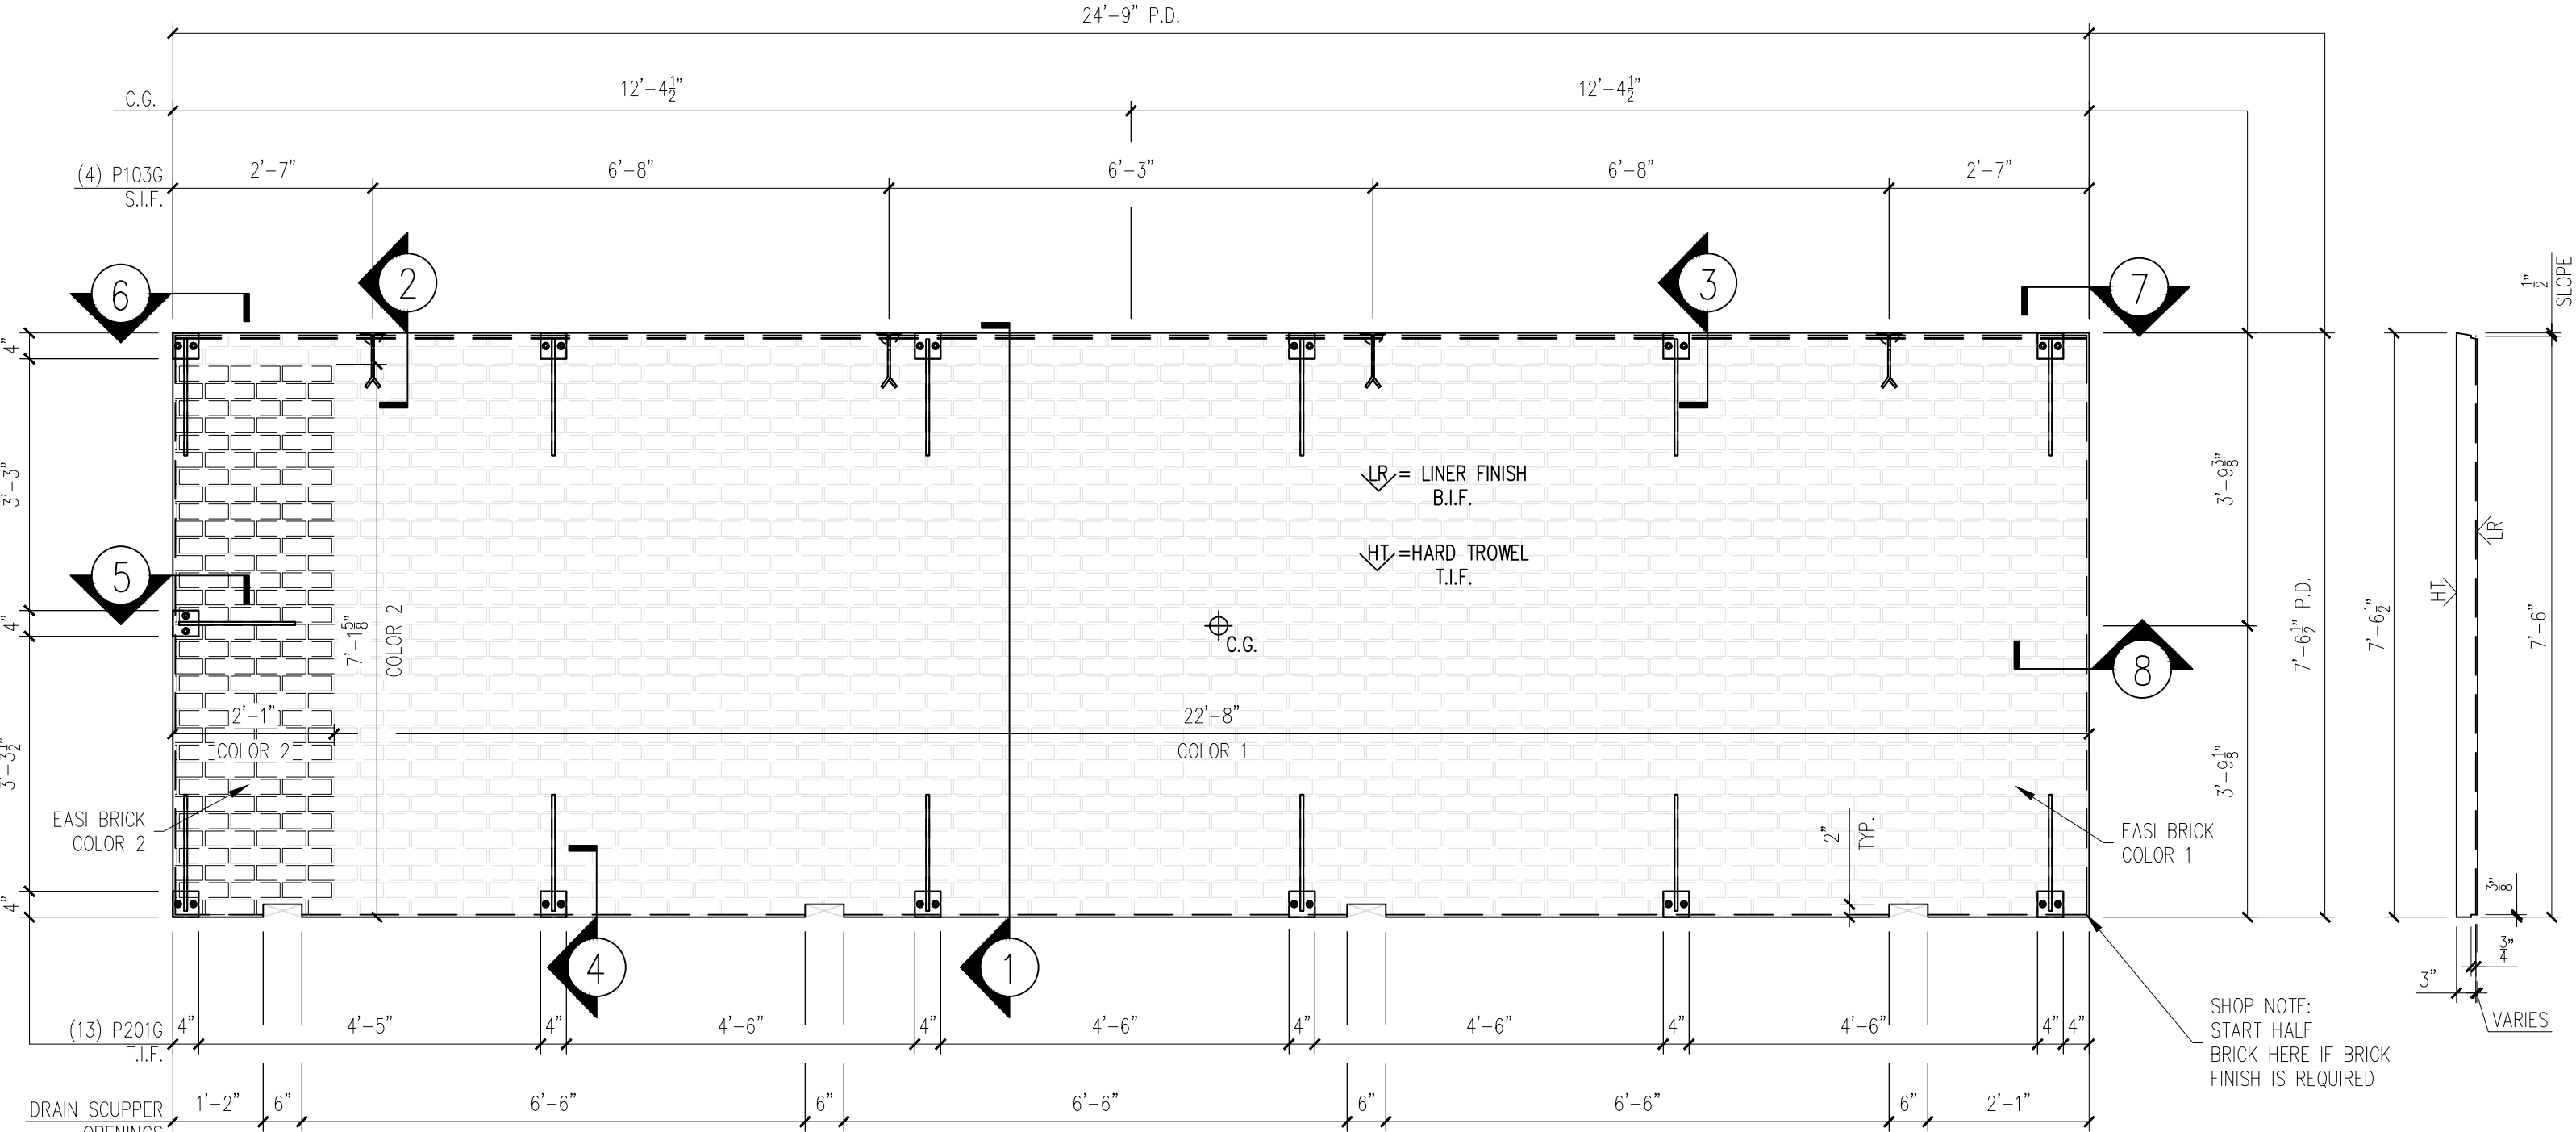

FORM VIEW  
SCALE: 1/2" = 1'-0"

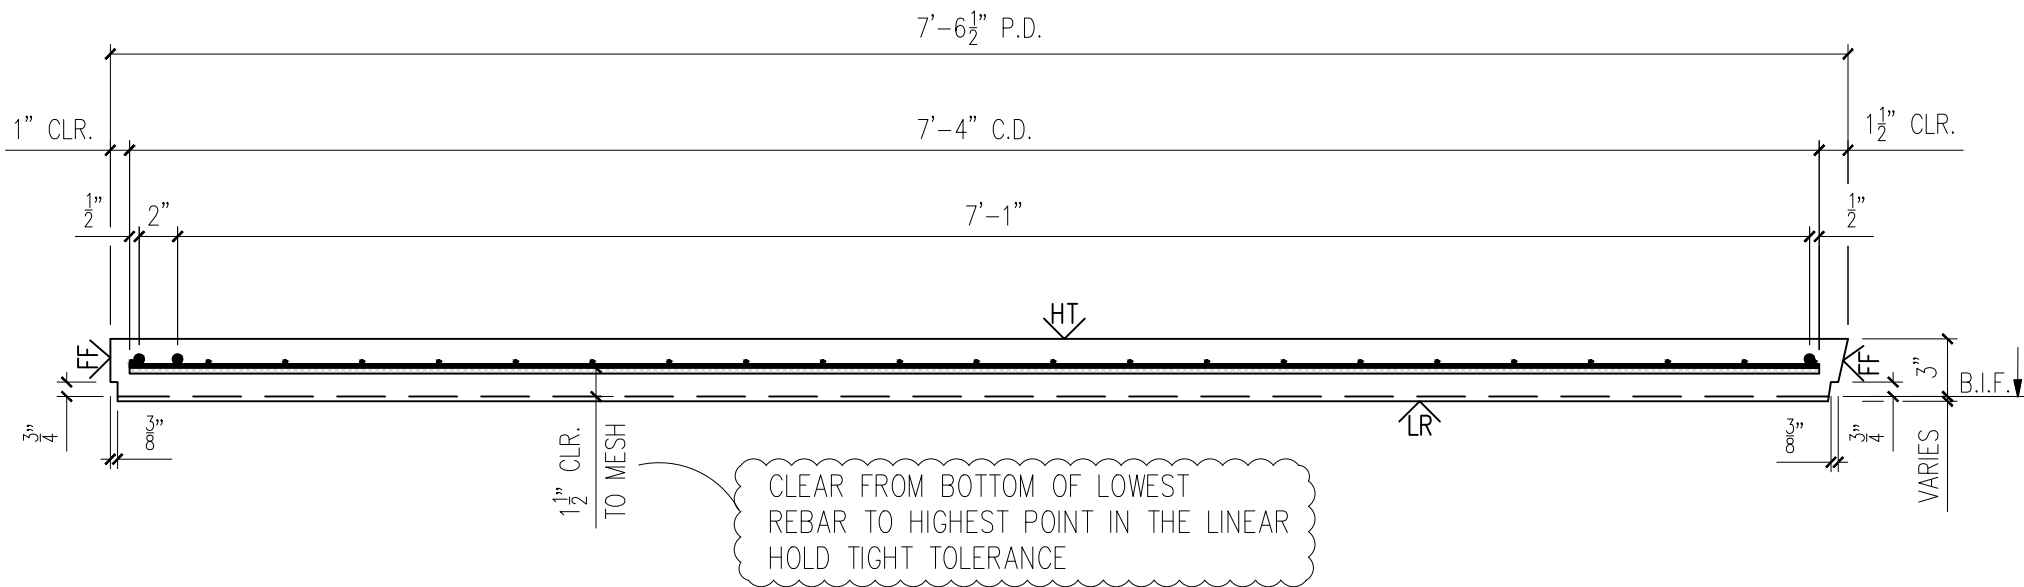


MESSAGE CENTER

1. REFER TO DETAILS AND SECTION FOR REINFORCEMENT PLACEMENT
2. SHOP TICKET SHOWS EXTERIOR FINISH CAST FACE DOWN

CHECKED BY: DATE:  
APPROVED BY: DATE:

| BILL OF MATERIALS |                                                     |      |
|-------------------|-----------------------------------------------------|------|
| MARK #            | DESCRIPTION                                         | QTY. |
| P103G             | 2 TON RL-4 TECH ERECTION ANCHOR (79527) (GALV.)     | 4    |
| P201G             | 4"x4"x8 3/8" W/(2) 8"x1 1/2" HAS W/1'-4" BENT REBAR | 13   |
|                   |                                                     |      |
|                   |                                                     |      |
|                   |                                                     |      |

HANDLING INSTRUCTIONS

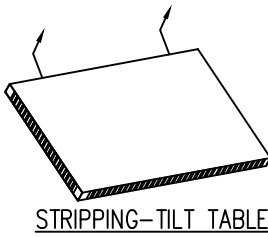

SHIPPING

YARD STORAGE

ERECTION

CONCRETE INSTRUCTIONS

CONCRETE RELBRSE @ 2,500 P.S.I.  
CONCRETE @ 28 DAYS: 5,000 P.S.I.

CONCRETE MIXES

|                    |               |      |
|--------------------|---------------|------|
| CONCRETE - GRAY    | VOLUME = 1.85 | C.Y. |
| CONCRETE - MIX 1   | VOLUME = -    | C.Y. |
| CONCRETE - MIX 2   | VOLUME = -    | C.Y. |
| SOFT SOUND         | VOLUME = -    | C.Y. |
| TOTALS             | VOLUME = 1.85 | C.Y. |
| WEIGHT: 7,525 LBS. |               |      |

FINISHING INSTRUCTIONS

LR = LINER FINISH

FF = FORM FINISH

HT = HARD TROWEL FINISH

|               |                         |
|---------------|-------------------------|
| H = 7'-6 1/2" | SQ.FT.(T.I.F.) = 185.15 |
| W = 24'-9"    | SQ.FT.(T.I.F.) = -      |
| D = 3"        | SQ.FT.(T.I.F.) = -      |

CONTROL NUMBERS:

|                     |                      |
|---------------------|----------------------|
| PRODUCT BUILDING    | SALES ORDER NUMBER - |
| SHEET NUMBER 1 OF 2 | NUMBER REQUIRED 1    |

| REV | INI | DESCRIPTION | DATE |
|-----|-----|-------------|------|
| -   | -   | -           | -    |
| -   | -   | -           | -    |
| -   | -   | -           | -    |
| -   | -   | -           | -    |

PROJECT: 50'X10'X9' - 10" SOFTBALL DUGOUT  
5185 FORT CAMPBELL BOULEVARD  
HOPKINSVILLE, KY 42240  
CONTRACTOR: CHRISTIAN COUNTY SCHOOLS

SCALE  
NTS

DRAWN BY  
FTL

CHECK BY  
WCR

ISSUE DATE  
07.21.26


PIECE MARK  
WP-04

EASI-SET® WORLDWIDE

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com  
www.EasiSet.com • 800-547-4045 • Fax 540-439-2541


25-3470  
CCHS Precast Buildings  
Right Hand Dugout  
ID - CVW  
Wall - WP-04  
Weight - 7,525  
1 Required

NOTE:  
DIMENSIONS PROVIDED ARE PULLED FROM EDGE OF  
CAGE TO CENTERLINE OF REBAR AND TO CENTER  
OF REBAR TO CENTER OF REBAR

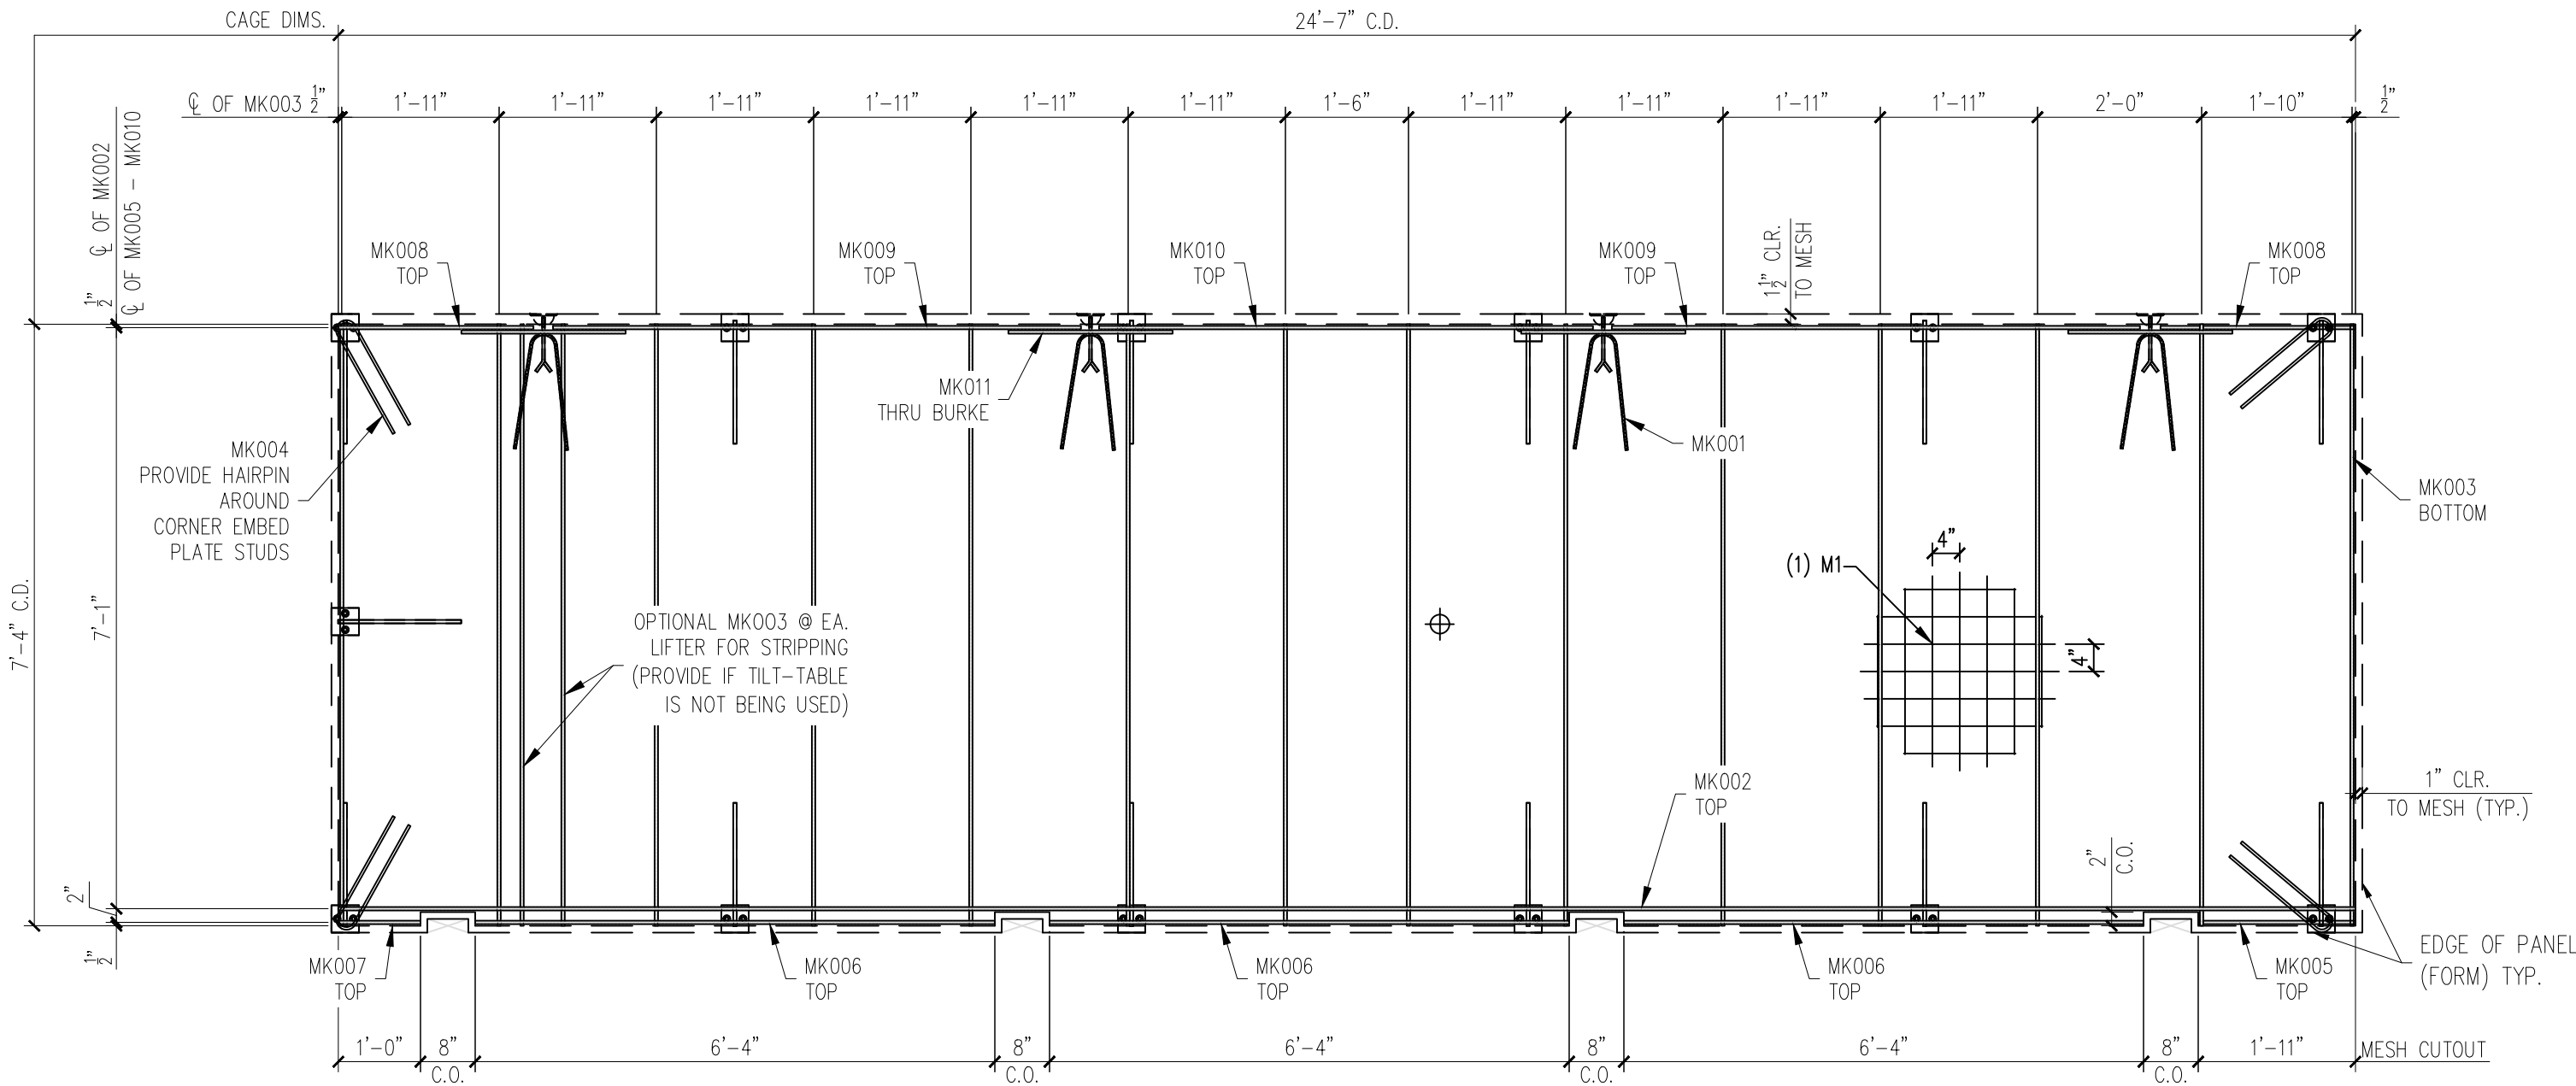


| REINFORCING SCHEDULE |                                |      |
|----------------------|--------------------------------|------|
| MARK #               | DESCRIPTION                    | QTY. |
| MK001                | #3 X 3'-0"                     | 4    |
| MK002                | #3 X 24'-7"                    | 1    |
| MK003                | #3 X 7'-4"                     | 14   |
| MK004                | #3 X 3'-1"                     | 4    |
| MK005                | #3 X 1'-11"                    | 1    |
| MK006                | #3 X 6'-4"                     | 3    |
| MK007                | #3 X 1'-0"                     | 1    |
| MK008                | #3 X 2'-4 1/2"                 | 2    |
| MK009                | #3 X 6'-5 1/4"                 | 2    |
| MK010                | #3 X 6'-0 1/4"                 | 1    |
| MK011                | #3 X 2'-0"                     | 4    |
| MESH SCHEDULE        |                                |      |
| MARK #               | DESCRIPTION                    | QTY. |
| M1                   | W4XW4 4"X4" WWF 24'-7" X 7'-4" | 1    |


| EASI-SET® WORLDWIDE                                     |             |     |
|---------------------------------------------------------|-------------|-----|
| 5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com |             |     |
| www.EasiSet.com • 800-547-4045 • Fax 540-439-2541       |             |     |
| DATE                                                    | DESCRIPTION | REV |
| -                                                       | -           | 1   |
| -                                                       | -           | 2   |
| -                                                       | -           | 3   |
| -                                                       | -           | 4   |
| -                                                       | -           | 5   |

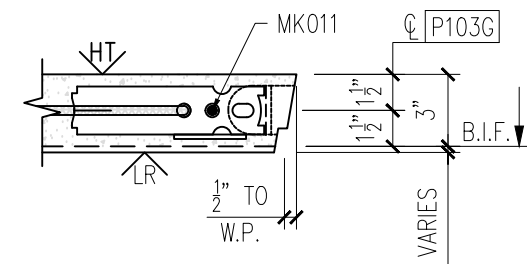


2

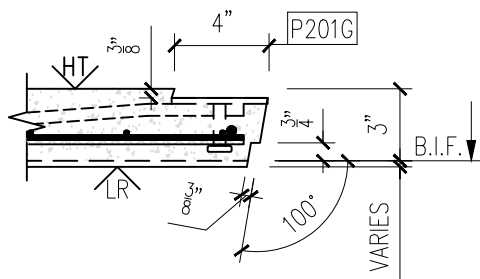


3

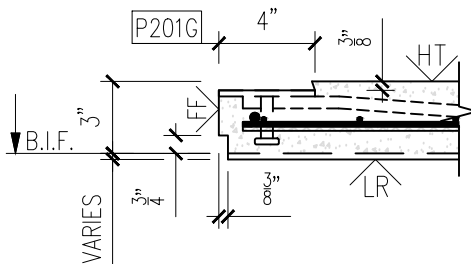


4

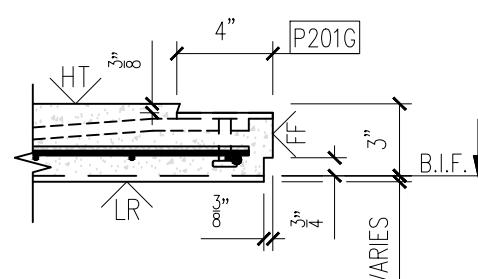


5

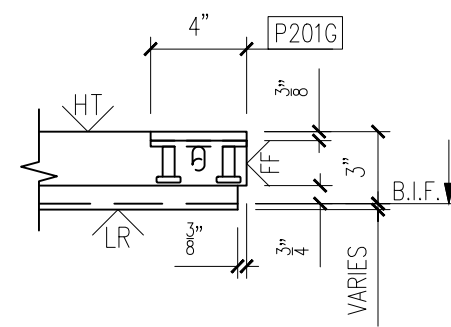

6

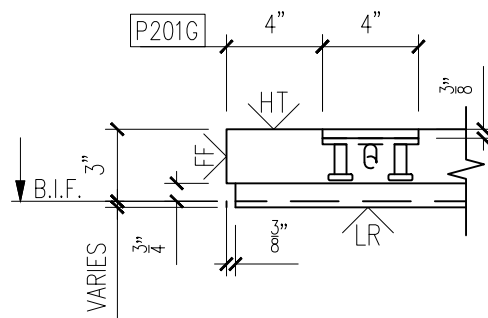

7

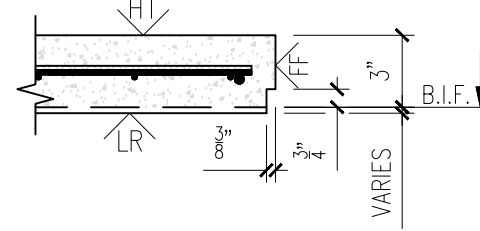

8

MESSAGE CENTER

1. REFER TO DETAILS AND SECTION FOR REINFORCEMENT PLACEMENT
2. SUPPLEMENTAL STEEL FOR STRIPPING AND HANDLING MAY BE ADDED AS REQUIRED.

CHECKED BY: DATE:  
APPROVED BY: DATE:

NOTE:  
1. CONSTRUCT REBAR-MESH CAGE ACCORDING TO THE DRAWINGS. SECURE LIFTING APPARATUS TO FORM AND ADD PROPER REINFORCEMENT. PLACE REBAR-MESH CAGE AND HAIRPINS AT INSERTS WITH PROPER CLBRANCES (PER DRAWINGS).

|              |                    |
|--------------|--------------------|
| PRODUCT      | SALES ORDER NUMBER |
| BUILDING     | -                  |
| SHEET NUMBER | NUMBER REQUIRED    |
| 2 OF 2       | 1                  |

|                                                                                                                                           |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| PROJECT: 50'X10'X9'-10" SOFTBALL DUGOUT<br>5185 FORT CAMPBELL BOULEVARD<br>HOPKINSVILLE, KY 42240<br>CONTRACTOR: CHRISTIAN COUNTY SCHOOLS | SCALE<br>NTS           |
|                                                                                                                                           | DRAWN BY<br>FTL        |
|                                                                                                                                           | CHECK BY<br>WCR        |
|                                                                                                                                           | ISSUE DATE<br>07.21.26 |
|                                                                                                                                           | PIECE MARK<br>WP-04    |