


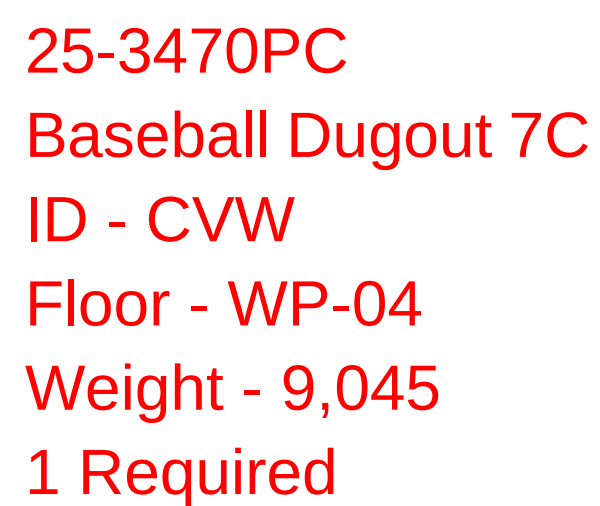

<u>SHEET NUMBER</u>	<u>NUMBER REQUIRED</u>
1 OF 2	1


PIECE MARK
WP-04

DATE:

<u>PRODUCT</u>	<u>SALES ORDER NUMBER</u>
BUILDING	-


[illegible]

WP-04

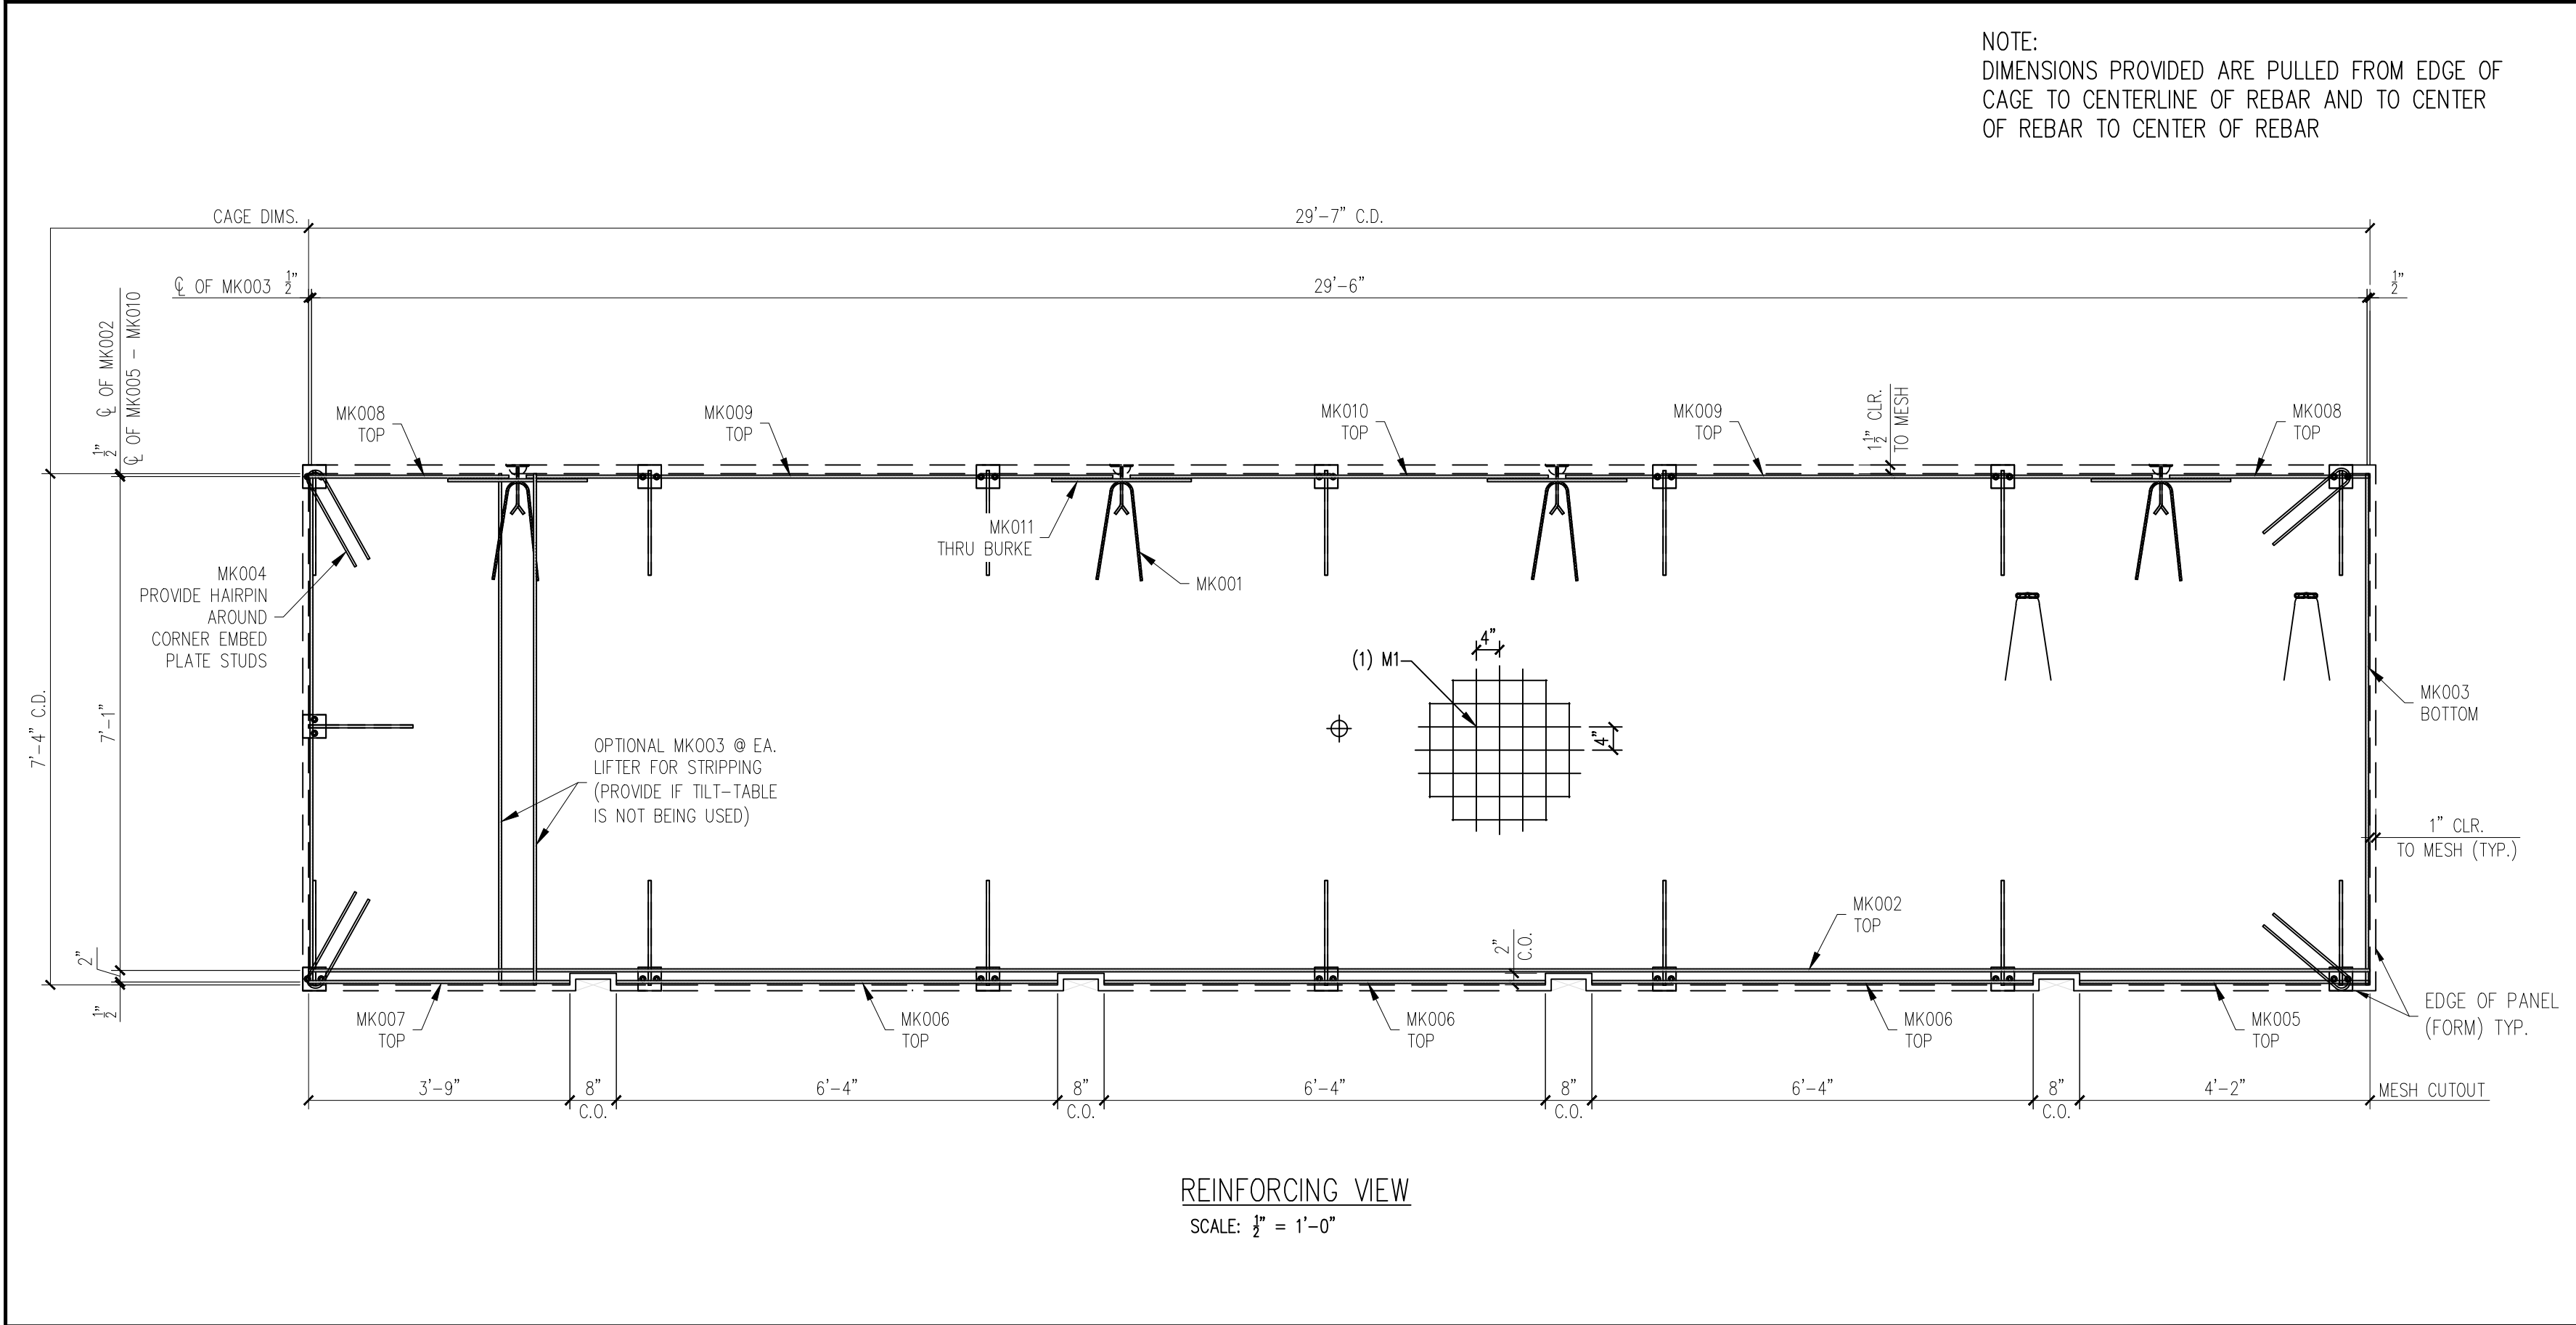

REINFORCING VIEW
SCALE: $\frac{1}{2}$ " = 1'-0"

REINFORCING SCHEDULE		
MARK #	DESCRIPTION	QTY.
MK001	#3 X 3'-0"	6
MK002	#3 X 29'-7"	1
MK003	#3 X 7'-4"	2
MK004	#3 X 3'-1"	4
MK005	#3 X 4'-2"	1
MK006	#3 X 6'-4"	3
MK007	#3 X 3'-9"	1
MK008	#3 X 2'-10 1/2"	2
MK009	#3 X 8'-5"	2
MK010	#3 X 6'-0"	1
MK011	#3 X 2'-0"	4
MESH SCHEDULE		
MARK #	DESCRIPTION	QTY.
M1	W4XW4 4"x4" WWF 29'-7" X 7'-4"	1

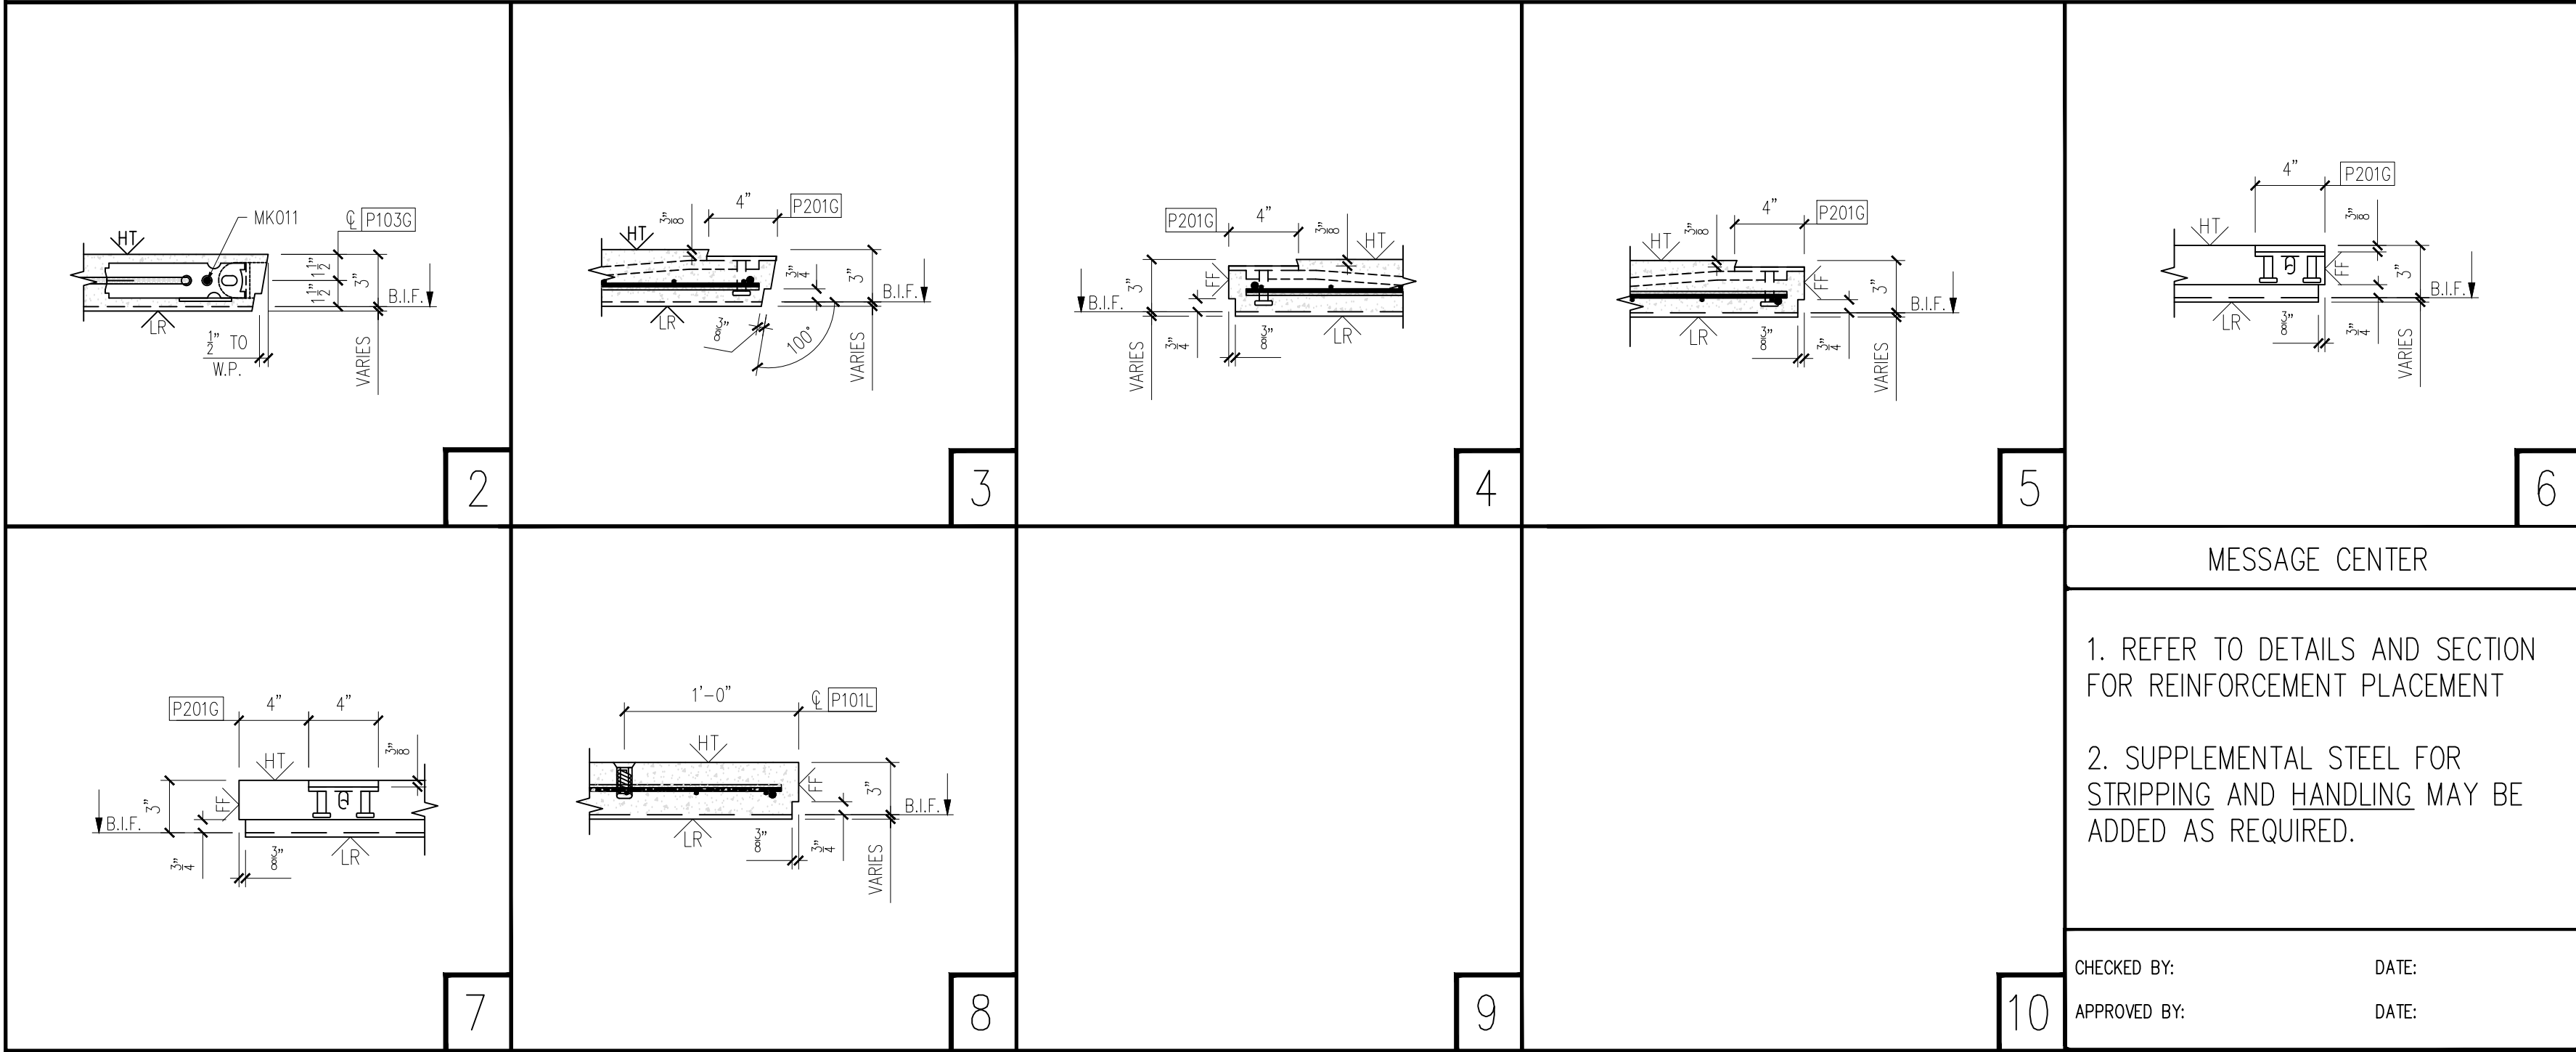

25-3470P7
Baseball Dugout 7C
ID - CVW
Floor - WP-04
Weight - 9,045
1 Required

NOTE:
1. CONSTRUCT REBAR-MESH CAGE
ACCORDING TO THE DRAWINGS. SECURE
LIFTING APPARATUS TO FORM AND ADD
PROPER REINFORCEMENT. PLACE
REBAR-MESH CAGE AND HAIRPINS AT
INSERTS WITH PROPER CLEARANCES
(PER DRAWINGS).

PRODUCT	SALES ORDER NUMBER
BUILDING	-
SHEET NUMBER	NUMBER REQUIRED
2 OF 2	1

EASI-SET® WORLDWIDE

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com
www.EasiSet.com • 800-547-4045 • Fax 540-439-2541

REV	DESCRIPTION	DATE
INI.		
1		
2		
3		
4		

PROJECT: 60'x10'x9'-10" BASEBALL DUGOUT
5185 FORT CAMPBELL BOULEVARD
HOPKINSVILLE, KY 42240
CONTRACTOR: CHRISTIAN COUNTY SCHOOLS

SCALE
NTS

DRAWN BY
FTL

CHECK BY
WCR

ISSUE DATE
08.05.26

PIECE MARK
WP-04