

Job Name: 25-3505 KYTC Multi Co Call 200 (251117)
 Job Location:
 Contractor: Jim Smith Contracting Co, LLC

Plant: 100
 3/25/2026 8:42:46 AM

Tech: J. Coppage - A
 PC: Jay Ross Jarvis



Structure ID: 1449 10

P2 BXLD3636FL-8

BX FLAT LID 8inW w/CC 24" HOLE


- P3) 24" - CASTING HEIGHT - 8"
- P2) 36" x 36" - BX FLAT LID 8inW w/CC 24" HOLE - 8"
- P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht - 38"
- 1) CASTING - HOE KY-510 F/C (KY TY.2)
- 1) 36" x 36" - Conseal CS-102 1.00"
- 2) Hole - 30

Structure Total: 7377 lb

Structure Notes:

- ***KYTC STATE PROJECT**
- 1. HOE KY-510 F/C (KY TY.2) PROVIDED BY ICAST.
- 2. KYTC JUNCTION BOX B1 / PER ASTM C913 SPEC'S.
- 3. CONCRETE = 4,000 PSI AT 28 DAYS.
- 4. TOP SLAB w 24" HOLE FOR KYTC TYPE 2 F/C.
- 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As. 62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .31) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .31) #5 BARS AT 12: C.C.E.W.

KYTC STATE PROJECT

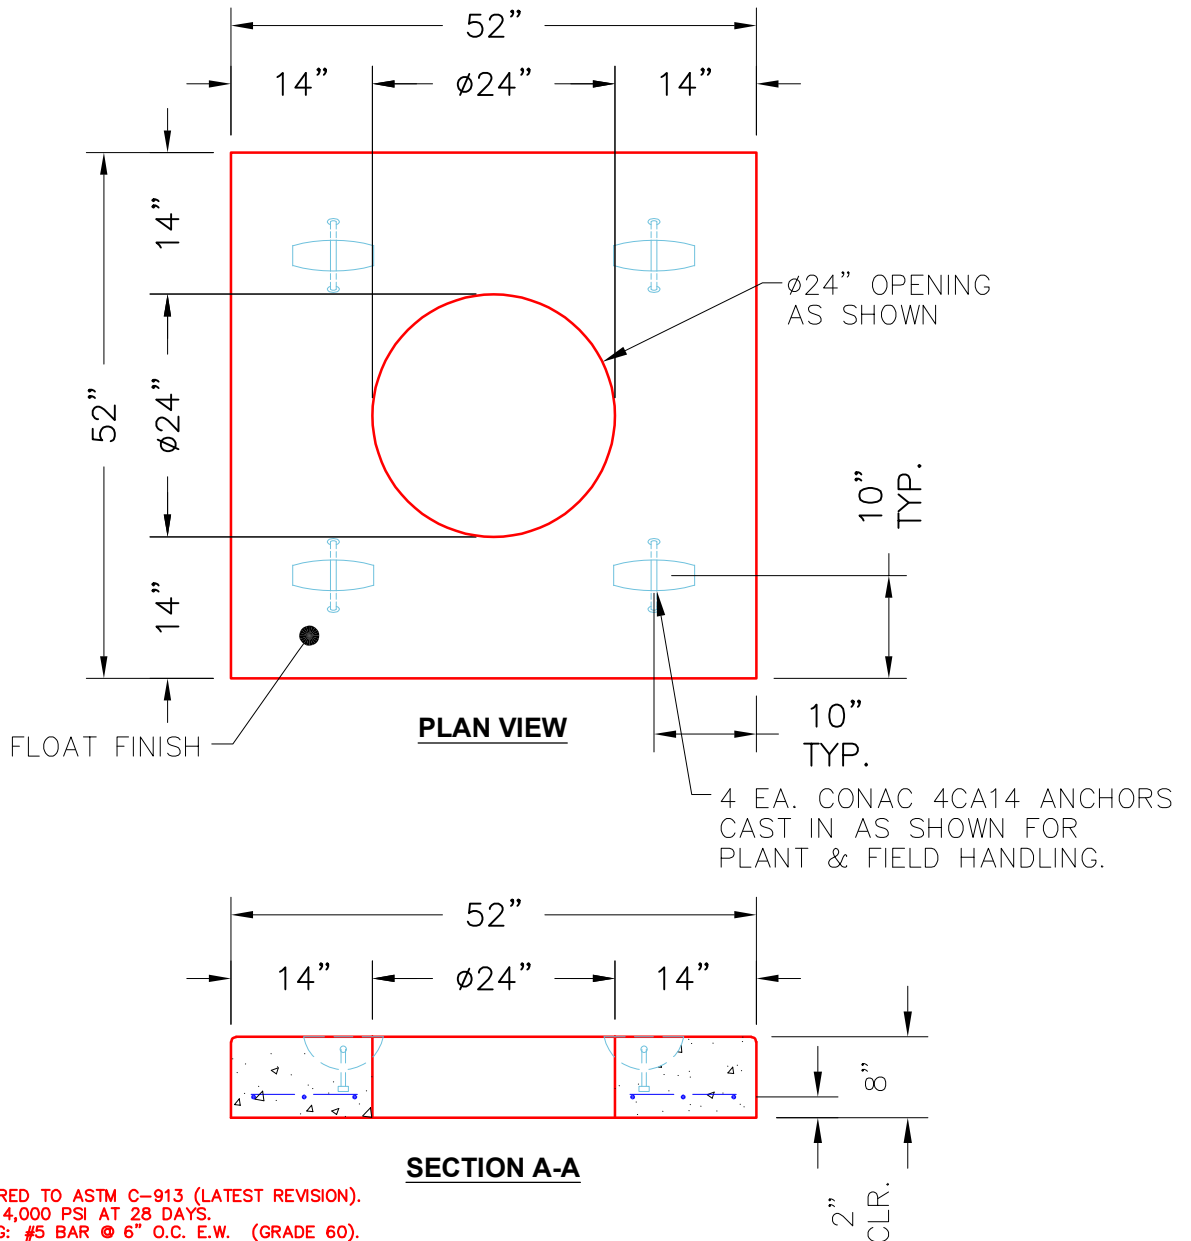

NOTES:

- 1. MANUFACTURED TO ASTM C-913 (LATEST REVISION).
- 2. CONCRETE: 4,000 PSI AT 28 DAYS.
- 3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Flat

Wall Thickness: 8"

Height (Ext): 8"

Weight (Net): 1511 lb
 Volume (Net): 0.39cu.yd