
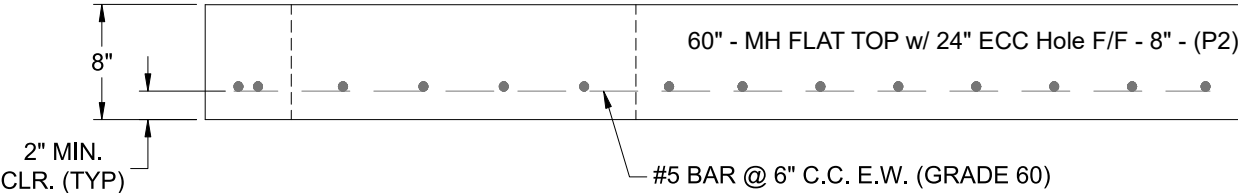


Job Name: 25-3535 - LFCU Boonville Job Location: Boonville, IN 47601 Contractor: Hahn Excavating, Inc.	Plant: 100	Tech:	J. Horsley - A	
	6/24/2026 12:46:11 PM	PC:	E. Bradley	
Structure ID: MH106 P2 MH060LD08 MH FLAT TOP w/ 24" ECC Hole F/F				

P3) 24" - CASTING HEIGHT - 7" P2) 60" - MH FLAT TOP w/ 24" ECC Hole F/F - 8" P1) 60" - MH BASE Custom Ht F/n - 57" 1) CASTING - HOE MC-315 F/C Storm 1) 60" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 1) Hole - 44 1) Hole - 12 1) Hole - 6 5) MH Step ML-10-TDS-NCR - 10"	0 lb 2429 lb 7771 lb 258 lb 0 lb 0 lb 0 lb 0 lb 0 lb 0 lb 10458 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: #5 BAR @ 6" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP) 4. HOE MC-315 FRAME & COVER "STORM" SUPPLIED BY ICAST 5. LIFTERS: 3 EA. WRA016 CONAC WIRE ROPE ANCHORS FOR PLANT & FIELD HANDLING 6. TOP SURFACE TO RECEIVE FLOATED FINISH
Structure Total:		

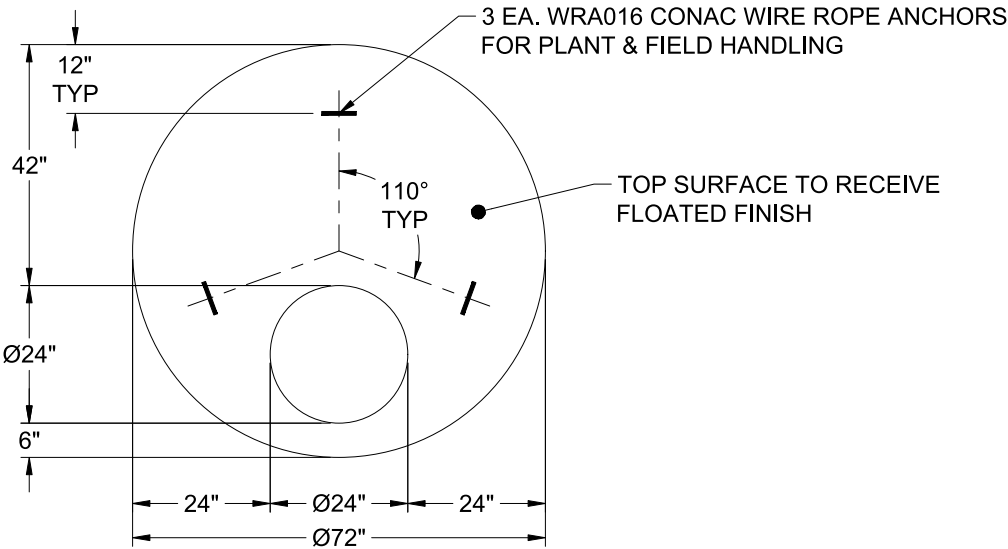

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Flat	Wall Thickness: 6"	Height (Ext): 8"	Weight (Net): 2429 lb Volume (Net): 0.62cu.yd
----------------------------------	--------------------------------	--------------------	------------------	--