

Job Name: 25-3575 - Berry Global North Parking Lot Consolidation
Job Location: Evansville, IN 47710
Contractor: Deig Bros Lumber & Construction Co, Inc.

Plant: 100

6/16/2026 8:48:21 PM

Tech: Jared - F

PC: A. Chambers



Structure ID: AD104

P2 MH048LD12-24SQ

MH FLAT TOP w/24"x24" Hole F/G

P3) 24" x 24" - CASTING HEIGHT - 4"
P2) 48" - MH FLAT TOP w/24"x24" Hole F/G - 12"
P1) 48" - MH BASE Custom Ht T/n - 58"
1) CASTING - HOE 280T F/G
1) CASTING - BMP SNOOT 18R w/ KIT
1) 48" - Conseal CS-102 1.00"
1) 24" x 24" - Conseal CS-102 1.00"
2) Hole - 16

Structure Total:



0 lb
1500 lb
5211 lb
182 lb
25 lb
0 lb
0 lb
0 lb
6918 lb

Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS AND NO INVERT CHANNEL.
4. CASTING SUPPLIED BY ICAST (HOE 280T F/G).
5. 18R SNOOT SUPPLIED BY ICAST.

REINFORCING PER ASTM A615 (GRADE 60).

- TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W..
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

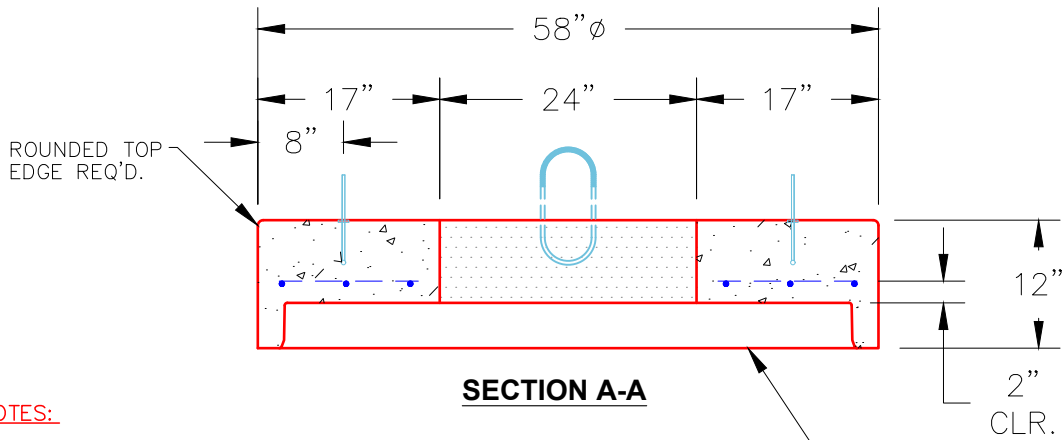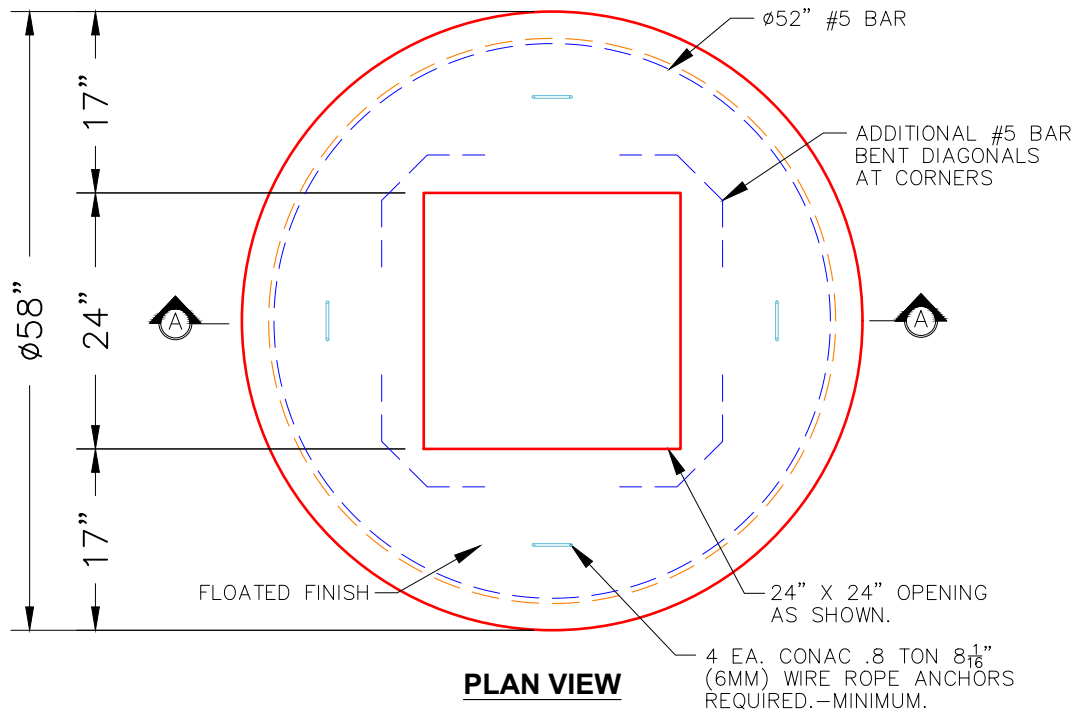

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

STANDARD SINGLE OFFSET
GROOVE JOINT REQUIRED

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1500 lb
Volume (Net): 0.37cu.yd