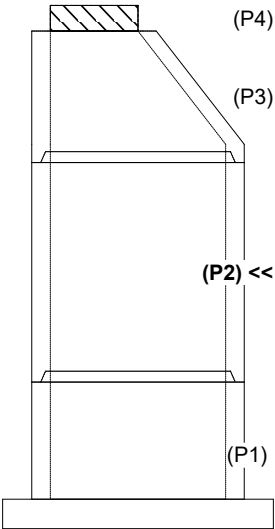
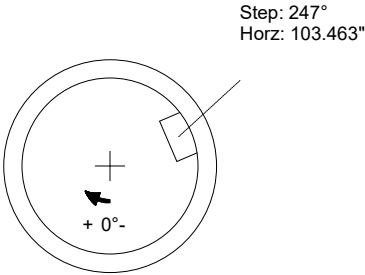


Job Name: 25-3579 - Lebanon Rd Clarks Run Trunk Sewer Ph 2					Plant: 100		Tech: J. Horsley					
Job Location: Danville, KY					8/21/2026 1:12:55 PM		PC: C. Goff					
Contractor: Hubert Excavating & Contracting												
Structure ID: MH G1												
P2		MH048RS60S										
MH RISER w/COATING T/G												
P4) 24" - CASTING HEIGHT - 7" P3) 48" - ECC CONE w/ 24" HOLE, w/Coating F/G - 36" P2) 48" - MH RISER w/COATING T/G - 60" P1) 48" - MH BASE w/FLANGE (08F/08EF) w/Coating T/n - 32" 1) 48" - MH INVERT CHANNEL - FULL HEIGHT 2) JOINT WRAP - 12" WD x 048" MAC WRAP 1) SPECIAL EXTERNAL COATING 2) 48" - Conseal CS-102 1.00" (Double) 2) Kor-N-Seal2 - S206-18L 10) MH Step ML-10-TDS-NCR - 10" 167.41 SqFt) Carboline Bitumastic 300M [EXT]					0 lb 2251 lb 4192 lb 4905 lb 1440 lb 0 lb 0 lb 0 lb 12 lb 0 lb 0 lb ----- Structure Total: 12799 lb		Structure Notes: 1. PER ASTM C478 SPECIFICATIONS. 2. CONCRETE = 4,000 PSI AT 28 DAYS. 3. CASTING BY OTHERS (HOE WT-375 SAN. F/C). 4. ALL PIECES TO HAVE EXTERIOR COATING (CARBOLINE BITUMASTIC 300M). REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.					
Rim: 911.13'					Rim to Invert: 11.145'		Slack: 0.744"		Sump: 2.004"		Step Position: 247°	
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset		
Invert 1												
Invert 2												
Invert 3												
Invert 4												
Invert 5												
Invert 6												
Invert 7												
Invert 8												
RIGHT-SIDE UP VIEW (int. dimensions)												
												
INSIDE WALL DIMENSIONS												
												
Coating (Int):			Seam Up: Tongue		Wall Thickness: 5"		Height (Int): 60"		Weight (Net): 4192 lb			
Coating (Ext): Carboline Bitumastic 300M			Seam Dn: Groove		Floor Height: 0"		Height (Ext): 60"		Volume (Net): 1.07cu.yd			

Job Number:

25-3579

Job Name:

Lebanon Rd Clarks Run Trunk Sewer Ph 2

Structure:

MH G1

Note:

This structure is to receive an external coating of carboline 300M (supplied by ICAST)