

Job Name: 25-3594 - Chipotle Mexican Grill
 Job Location: Paducah, KY 42001
 Contractor: H&T Development

Plant: 100

Tech: J. Horsley - F

12/23/2025 8:50:26 AM

PC: T. Lewis



Structure ID: DBI 3

P1 MH048BAVF

MH BASE Custom Ht F/n

- P3) 24" x 24" - CASTING HEIGHT - 4"
- P2) 48" - MH FLAT TOP w/24"x24" Hole F/F - 7"
- P1) 48" - MH BASE Custom Ht F/n - 27"
- 1) CASTING - HOE 280T F/G
- 1) 48" - Conseal CS-102 1.00"
- 1) 24" x 24" - Conseal CS-102 1.00"
- 1) Hole - 20
- 1) Hole - 16

- Structure Notes:**
1. PER ASTM C-478 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: PER ASTM A615
 4. NO INVERT CHANNEL
 5. NO STEPS
 6. CASTING BY ICAST (HOE 280T FRAME & GRATE)



Structure Total: 4391 lb

Rim: 368.56' Rim to Invert: 3.17' Slack: 0.04" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	365.39'	0°	0"	15" ADS N-12	18"	Hole 20	20"	20.629"	-1.5"	0"
Invert 2	365.39'	130°	65.799"	12" HDPE	14.5"	Hole 16	16"	16.312"	-1.25"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

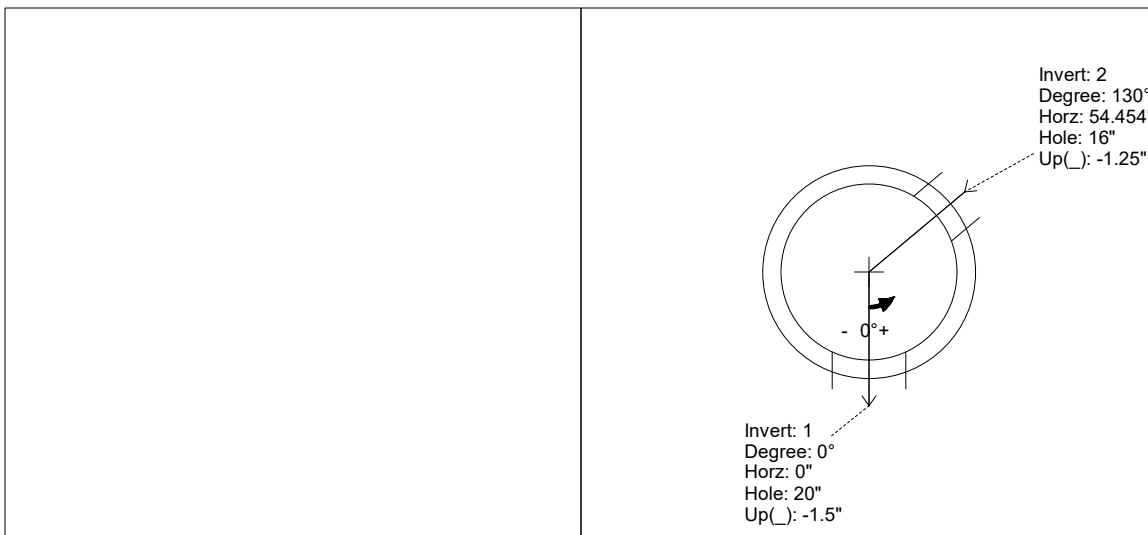

INSIDE WALL DIMENSIONS

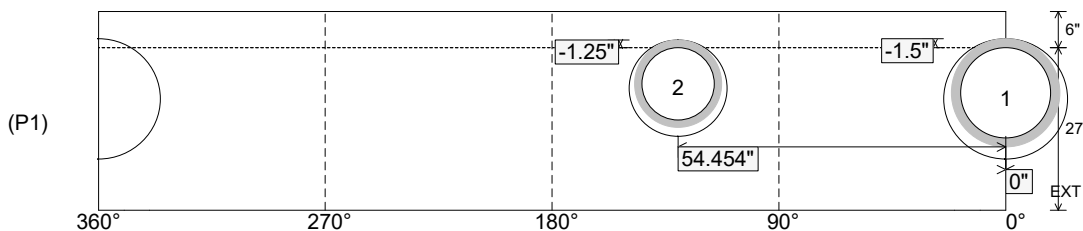

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: n/a

Wall Thickness: 5"
 Floor Height: 6"

Height (Int): 27"
 Height (Ext): 33"

Weight (Net): 2995 lb
 Volume (Net): 0.76cu.yd