

Job Name: 25-3594 - Chipotle Mexican Grill  
 Job Location: Paducah, KY 42001  
 Contractor: H&T Development

Plant: 100  
 12/23/2025 8:50:26 AM

Tech: J. Horsley - F  
 PC: T. Lewis



**Structure ID: DBI 4**

**P1 BX2424-08BA24**

**BOX BASE 8inW, 8inF F/n**

- P2) 24" x 24" - CASTING HEIGHT - 4"
- P1) 24" x 24" - BOX BASE 8inW, 8inF F/n - 24"
- 1) CASTING - HOE 280T F/G
- 1) 24" x 24" - Conseal CS-102 1.00"
- 1) Hole - 16

0 lb  
 2980 lb  
 182 lb  
 0 lb  
 0 lb  
 -----  
 Structure Total: 3162 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
  2. CONCRETE: 4,000 PSI AT 28 DAYS
  3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
  4. NO INVERT CHANNEL
  5. NO STEPS
  6. CASTING BY ICAST (HOE 280T FRAME & GRATE)

Rim: 368.4'    Rim to Invert: 2.35'    Slack: 0.2"    Sump: 0"    Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ( )	Offset
Invert 1	366.05'	330°	15.381"	12" HDPE	14.5"	Hole 16	16"	18.475"	-1.25"	6"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										


RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)



Invert: 1  
 Degree: 330°  
 Horz: 12"  
 Hole: 16"  
 Up( ): -1.25"

INSIDE WALL DIMENSIONS

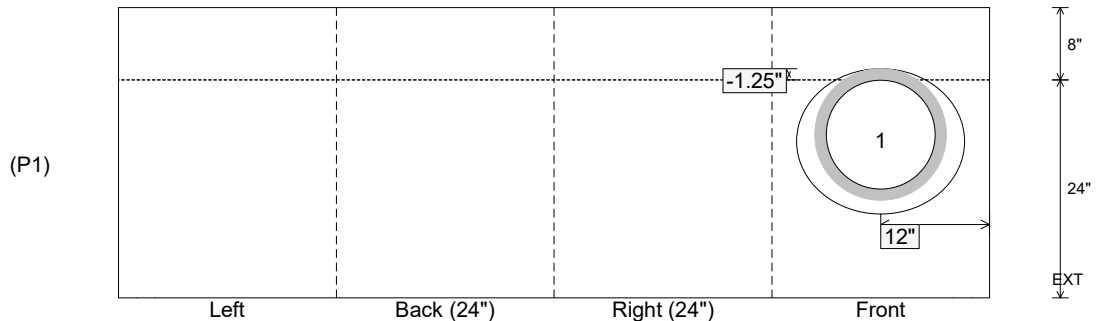

Coating (Int):  
 Coating (Ext):

Seam Up: Flat  
 Seam Dn: n/a

Wall Thickness: 8"  
 Floor Height: 8"

Height (Int): 24"  
 Height (Ext): 32"

Weight (Net): 2980 lb  
 Volume (Net): 0.76cu.yd