

Job Name: 25-3664-Hallmark Communities
Job Location: Nicholasville, KY
Contractor: The Allen Company, Inc.

Plant: 100
9/9/2026 2:28:11 PM

Tech: Jared - A
PC: Erica Bradley





Structure ID: CI4
P2 BX242408-VF BOX RISER 8inW, Variable Ht

- P3) 24" x 24" - CASTING HEIGHT - 5"
P2) 24" x 24" - BOX RISER 8inW, Variable Ht - 13"
P1) 24" x 24" - BOX BASE 8inW, 8inF - 60"
1) CASTING - HOE KY-465 SET (CBI TY F)
2) 24" x 24" - Conseal CS-102 1.00"
1) Hole - 24
1) Hole - 20
1) Hole - 12


Structure Total: 7297 lb
- Structure Notes: .
1. HOE KY-465 SET (CBI TY F) PROVIDED BY OTHERS.
2. KYTC CBI TYPE F / ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. NO STEPS.
6. REINFORCING PER ASTM A615 (GRADE 60).
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 1019.3'		Rim to Invert: 6.5'		Slack: 0"	Sump: 0"	Step Position:				
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

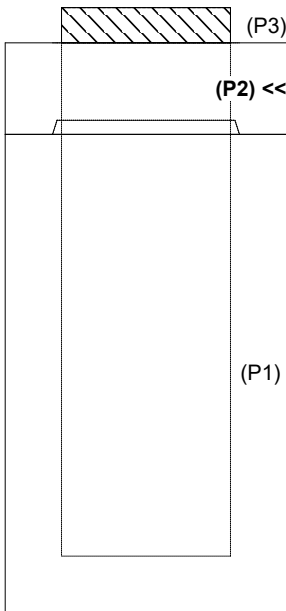

INSIDE WALL DIMENSIONS

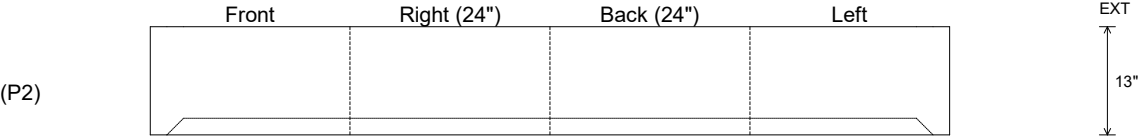

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 13" Height (Ext): 13"	Weight (Net): 1117 lb Volume (Net): 0.28cu.yd
----------------------------------	----------------------------------	--	--	--