Job Name: 25-3664-Hallmark Communities Job Location: Nicholasville, KY Contractor: The Allen Company, Inc.	Plant: 100 9/9/2026 2:28:05 PM	Tech: Jared - A PC: Erica Bradley	

Structure ID: CI8

P2 BX242408-VF BOX RISER 8inW, Variable Ht

P3) 24" x 24" - CASTING HEIGHT - 5"	0 lb
P2) 24" x 24" - BOX RISER 8inW, Variable Ht - 31"	2664 lb
P1) 24" x 24" - BOX BASE 8inW, 8inF - 60"	5622 lb
1) CASTING - HOE KY-465 SET (CBI TY F)	465 lb
2) 24" x 24" - Conseal CS-102 1.00"	0 lb
2) Hole - 24	0 lb
2) Hole - 12	0 lb

Structure Total:	8751 lb

Structure Notes: .
1. HOE KY-465 SET (CBI TY F) PROVIDED BY OTHERS.
2. KYTC CBI TYPE F / ASTM C478 SPECIFICATIONS.
3. CONCRETE = 4,000 PSI AT 28 DAYS.
4. NO INVERT CHANNEL.
5. NO STEPS.
6. REINFORCING PER ASTM A615 (GRADE 60).
- RISER/WALLS (As .12)
- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

Rim: 1010.15' Rim to Invert: 8' Slack: 0" Sump: 0" Step Position:

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

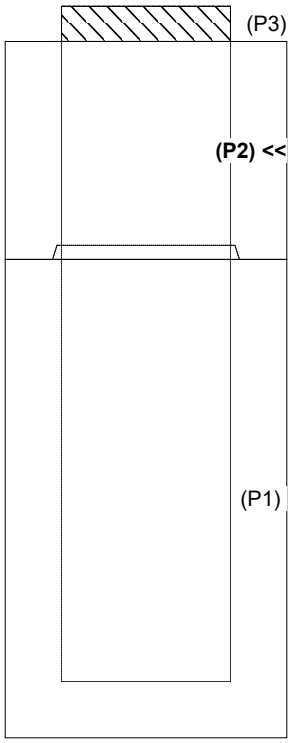



INSIDE WALL DIMENSIONS

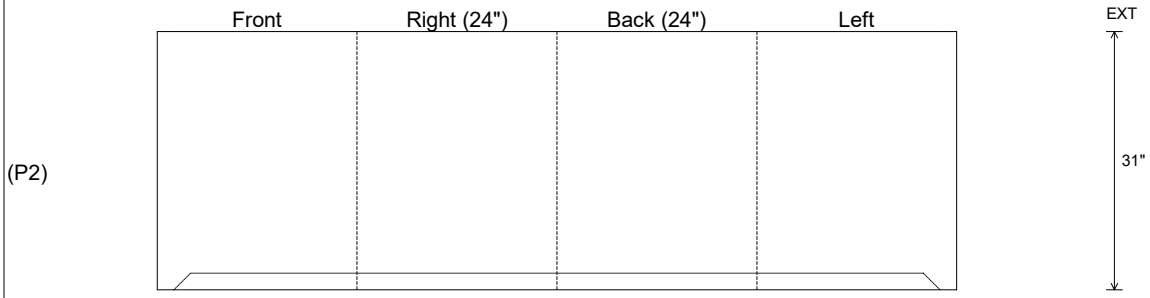

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: Groove	Wall Thickness: 8" Floor Height: 0"	Height (Int): 31" Height (Ext): 31"	Weight (Net): 2664 lb Volume (Net): 0.68cu.yd