




Job Name: 25-3664-Hallmark Communities Job Location: Nicholasville, KY Contractor: The Allen Company, Inc.					Plant: 100 9/9/2026 2:13:39 PM		Tech: Jared - A PC: Erica Bradley			
Structure ID: MH2										
P1 MH048BA36		MH BASE								
P3) 24" - CASTING HEIGHT - 7" P2) 48" - ECC CONE w/ 24" HOLE - 30" P1) 48" - MH BASE - 36" 1) CASTING - HOE MCB-375-B F/Bar Grt 1) 48" - Conseal CS-102 1.00" 1) 24" - Conseal CS-102 1.00" 2) Hole - 20 6) MH Step ML-10-TDS-NCR - 10"					0 lb 2050 lb 3575 lb 250 lb 0 lb 0 lb 0 lb 0 lb 0 lb 5875 lb Structure Total:		Structure Notes: 1. HOE MCB-375 F/C STORM PROVIDED BY OTHERS. 2. PER ASTM C478 SPECIFICATIONS. 3. CONCRETE = 4,000 PSI AT 28 DAYS. 4. REINFORCING PER ASTM A615 (GRADE 60). - CONE (As .12) - RISER/WALLS (As .12) - FLOOR (As .31) #5 BARS AT 12" C.C.E.W.			
Rim: 1002.34' Rim to Invert: 6.25' Slack: 2" Sump: 0" Step Position: 130°										
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	996.09'	0°	0"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 2	996.09'	260°	131.598"	15" HDPE	17.6"	Hole 20	20"	20.629"	-1.3"	0"
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

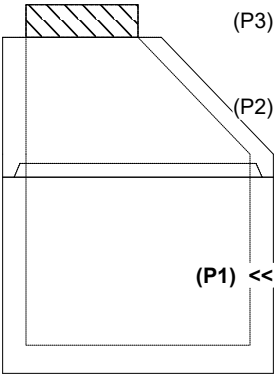


RIGHT-SIDE UP VIEW (int. dimensions)

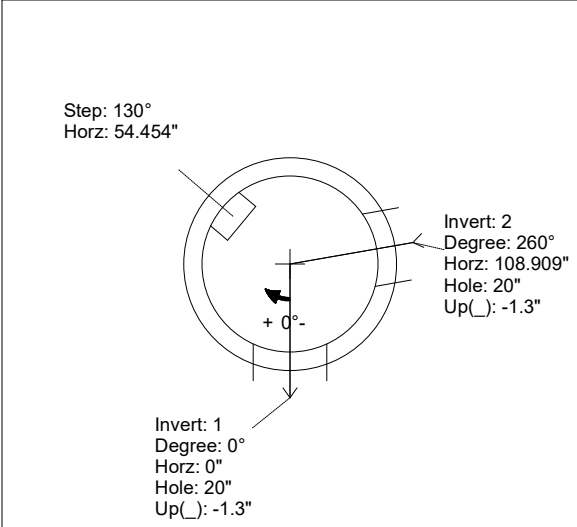

UPSIDE-DOWN VIEW (int. dimensions)

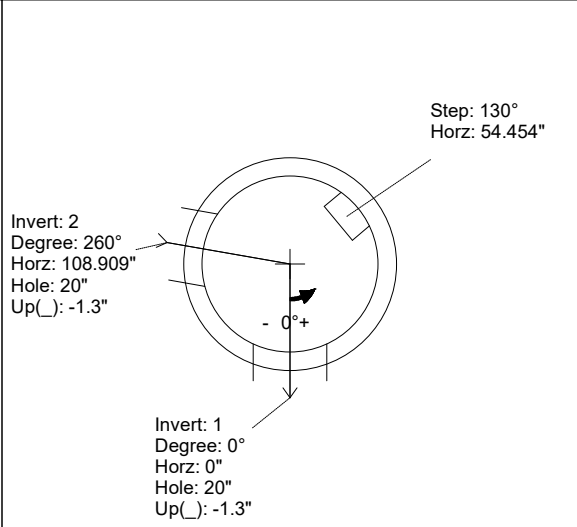

INSIDE WALL DIMENSIONS

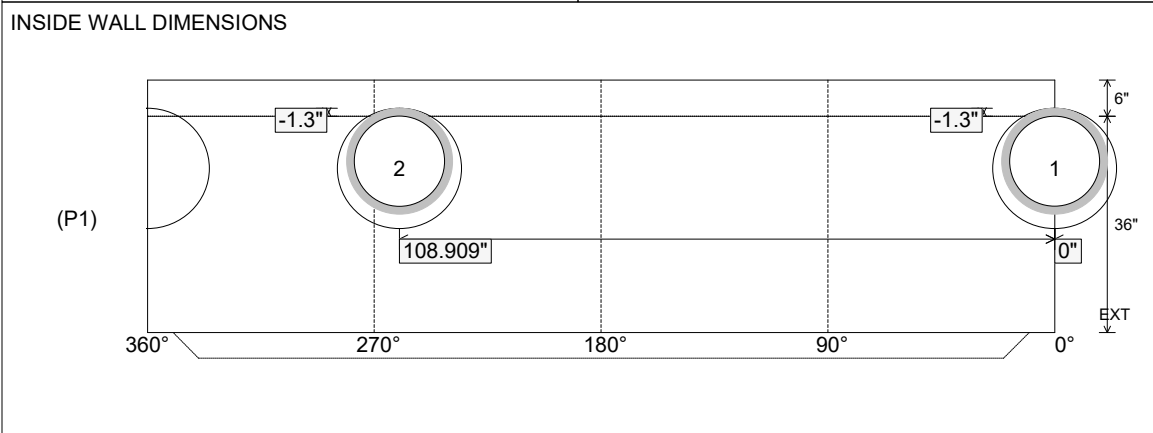

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: n/a	Wall Thickness: 5" Floor Height: 6"	Height (Int): 36" Height (Ext): 42"	Weight (Net): 3575 lb Volume (Net): 0.91cu.yd
----------------------------------	---------------------------------	--	--	--