

Job Name: 25-3665 Wyndham Estates - Lot 37
 Job Location: Evansville, IN
 Contractor: CD Real Estate Development, Inc

Plant: 100
 2/27/2026 1:51:44 PM

Tech: J.Horsley - A
 PC: Trevor Lewis



Structure ID: MH 512B

P2 BX030030-08LD06-24C


CB FLAT TOP 6"W w/24"Hole F/F

- P3) 24" - CASTING HEIGHT - 7"
- P2) 30" x 30" - CB FLAT TOP 6"W w/24"Hole F/F - 8"
- P1) 30" x 30" - BOX BASE 6inW, 6inF F/n - 60"
- 1) CASTING - EJ 1022Z1 Frame
- 1) CASTING - EJ 1020 M1 Grate
- 1) 30" x 30" - Conseal CS-102 1.00"
- 2) Hole - 20

0 lb
 880 lb
 4912 lb
 250 lb
 250 lb
 0 lb
 0 lb

 Structure Total: 6292 lb

- Structure Notes:**
1. EJIW 1022 PROVIDED BY ICAST.
 2. PER ASTM C913 SPECIFICATIONS.
 3. CONCRETE = 4,000 PSI AT 28 DAYS.
 4. NO INVERT CHANNEL.
 5. REINFORCING PER ASTM A615 (GRADE 60).
 - TOP SLAB (As .62) #5 BARS AT 6" C.C.E.W.
 - WALLS (As .12) #5 BARS AT 12" C.C.E.W.
 - FLOOR (As .12) #5 BARS AT 12" C.C.E.W.

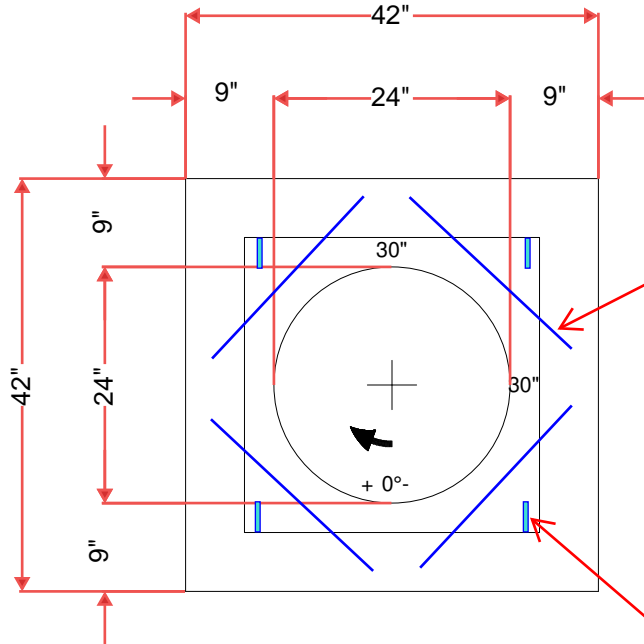


4EA. DIAGONAL BARS
 #5 BAR x 26" LONG
 2" CLR.

4EA. CONCAC WRA016
 WIRE LOOP LIFTERS
 IN 8" FROM EACH SIDE

TROWL FINISH
 ON TOP SURFACE

#5 BARS AT 6" C.C.E.W.
 2" CLR. TYP

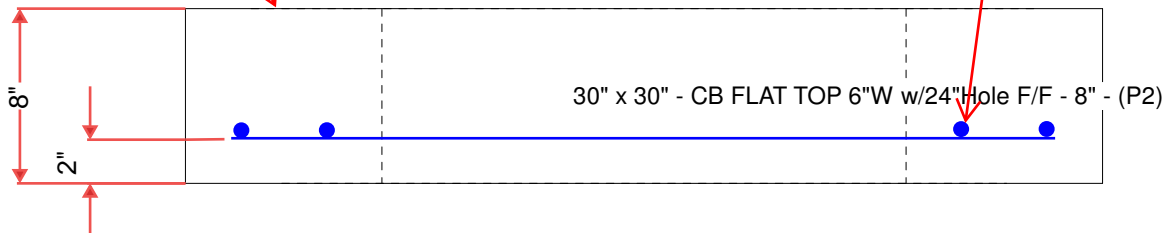

Coating (Int):
 Coating (Ext):

Seam Up: Flat
 Seam Dn: Flat

Wall Thickness: 6"

Height (Ext): 8"

Weight (Net): 880 lb
 Volume (Net): 0.22cu.yd