
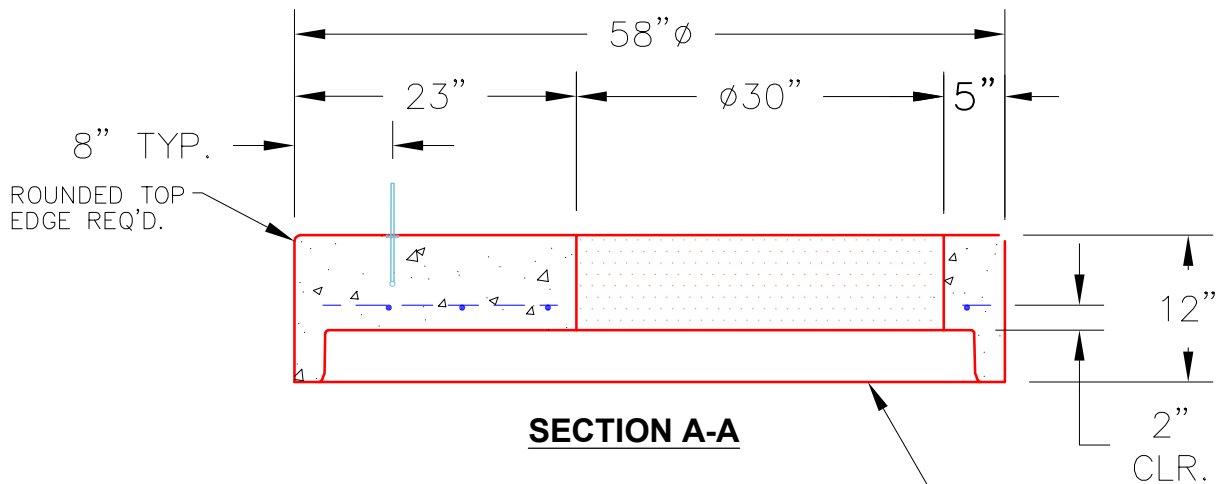


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

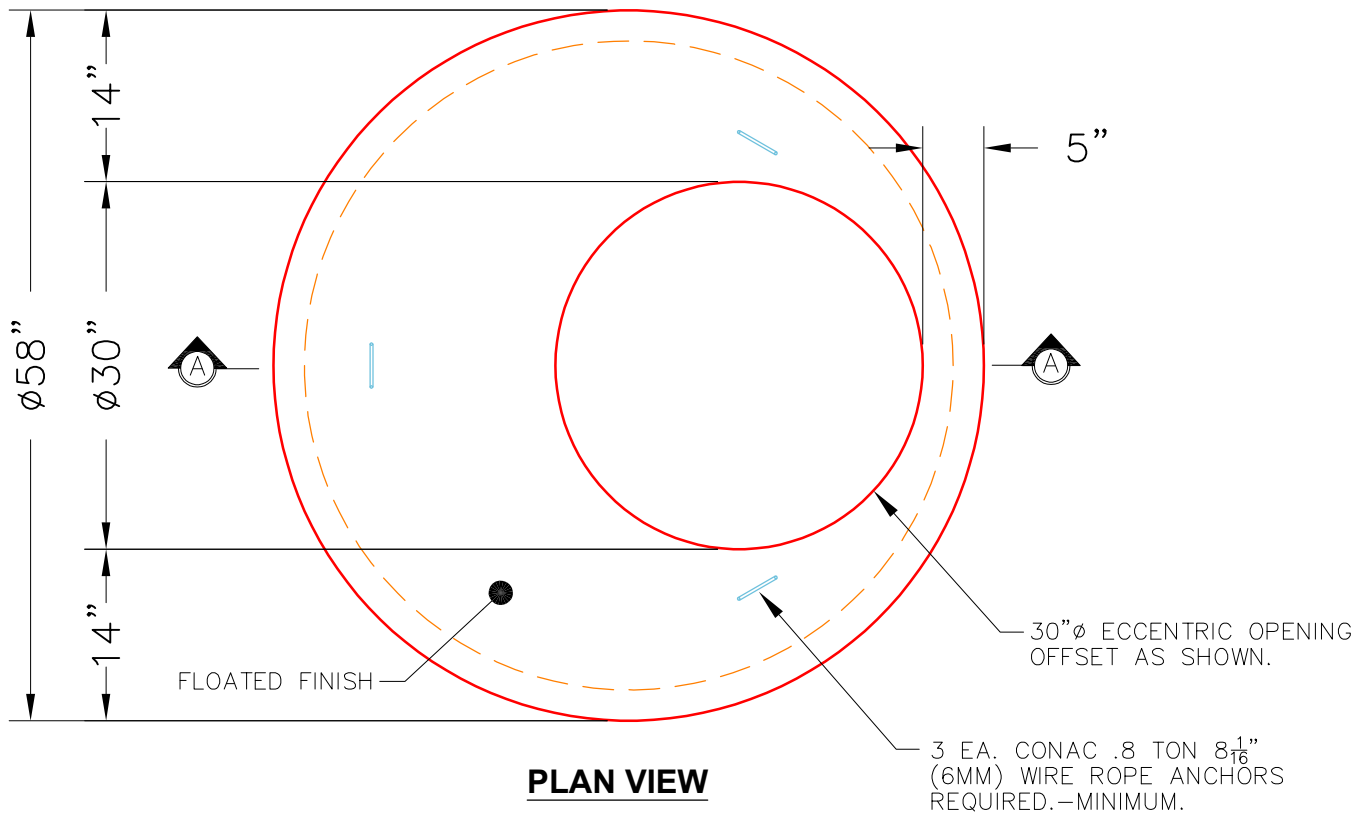

**NOTES:**

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 10" O.C. E.W. (GRADE 60).

|                                                      |                                                          |                               |                                                   |  |
|------------------------------------------------------|----------------------------------------------------------|-------------------------------|---------------------------------------------------|--|
| <b>PRODUCTION WORK ORDER</b>                         |                                                          | PRODUCT I.D.:<br>MH048LD12-30 | DESCRIPTION: 48" $\phi$ X 12" MH TOP SLAB SPECIAL |  |
|                                                      | <b>QUALITY CONTROL CHECKLIST</b>                         |                               | PRODUCT VIEW: RIGHT SIDE UP                       |  |
|                                                      | <input type="checkbox"/> ALL DIMENSIONS CORRECT.         |                               | CUSTOMER: CONTECH ENGINEERING SOLUTIONS           |  |
|                                                      | <input type="checkbox"/> LIFTERS INSTALLED.              |                               | PROJECT: 809335 PETERSBURG PARK                   |  |
|                                                      | <input type="checkbox"/> HOLE LOCATION CORRECT.          |                               | STRUCTURE: 10-CS-4                                |  |
|                                                      | <input type="checkbox"/> REINFORCING CORRECT.            |                               | QUOTE/SALES ORDER NO: 25-3677                     |  |
|                                                      | <input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM. |                               | PC: T. SEKULA                                     |  |
| <input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED. |                                                          | DRAWING: J. COPPAGE           |                                                   |  |
| <input type="checkbox"/> GROOVE JOINT INSTALLED.     |                                                          | DATE: 10/15/25                |                                                   |  |
| QC CHECK INITIALS:                                   |                                                          | SCALE: NTS                    |                                                   |  |
|                                                      |                                                          | PG. 1 of 1                    |                                                   |  |