

Job Name: 25-4279 - KYTC Christian Co (251031)
Job Location: Hopkinsville, KY
Contractor: CITCO Water

Plant: 100

5/8/2026 11:22:40 AM

Tech: Jared- F

PC: C. Goff



Structure ID: 93+36 ARV

P3 MH048LD12ECC

MH FLAT TOP w/ 24" ECC Hole F/G

- P4) 24" - CASTING HEIGHT - 7"
P3) 48" - MH FLAT TOP w/ 24" ECC Hole F/G - 12"
P2) 48" - MH DH RISER Custom Ht T/F - 35"
P1) 48" - P.I.P. BY OTHERS - BTM SLAB F/n - 0"
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)
2) 48" - Conseal CS-102 1.00" (Double)
2) DOGHOUSE - 8"x8"


Structure Total:

0 lb
1561 lb
2367 lb
0 lb
0 lb
0 lb
0 lb
0 lb
0 lb
3928 lb


Structure Notes:

1. PER ASTM C478 SPECIFICATIONS.
2. CONCRETE = 4,000 PSI AT 28 DAYS.
3. NO STEPS.
4. CASTING SUPPLIED BY OTHERS.

REINFORCING PER ASTM A615 (GRADE 60).
- TOP SLAB = H20 LOADING.
- RISER/WALLS (As .12)

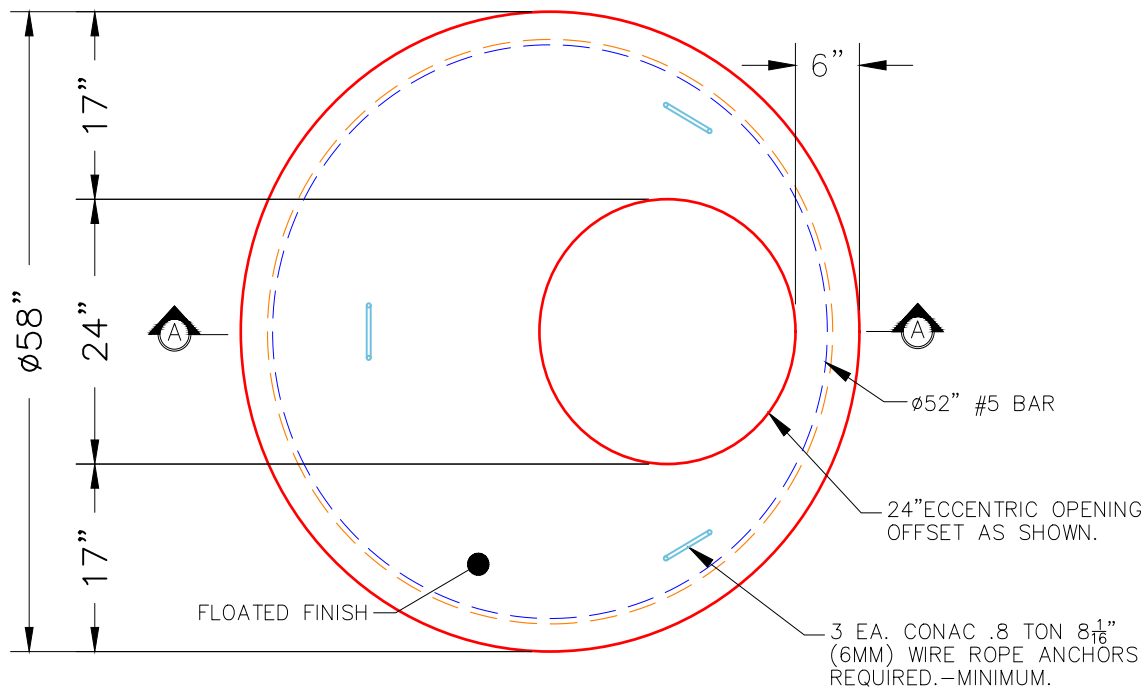

PLAN VIEW

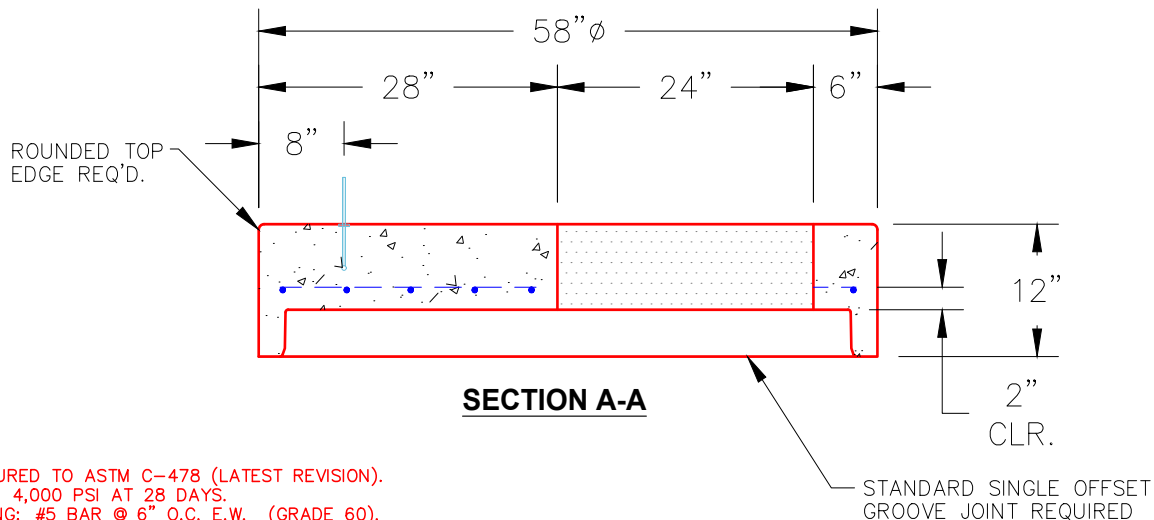

NOTES:

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 4,000 PSI AT 28 DAYS.
3. REINFORCING: #5 BAR @ 6" O.C. E.W. (GRADE 60).

Coating (Int):
Coating (Ext):

Seam Up: Flat
Seam Dn: Groove

Wall Thickness: 5"

Height (Ext): 12"

Weight (Net): 1561 lb
Volume (Net): 0.42cu.yd