

Job Name: 25-4288 - Project Wave

Job Location: Franklin, KY 42134

Contractor: Cumberland Pipeline LLC

Plant: 100

7/10/2026 8:14:20 AM

Tech: Jared - A

PC: Erica Bradley




Structure ID: 94

P2 MH048RS60X


MH RISER w/XYPEX

P4) 24" - CASTING HEIGHT - 7"	0 lb	Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. INVERT CHANNEL REQUIRED 5. STEPS AT 0 DEGREES 6. JBS 1150 FRAME & COVER "SANITARY" SUPPLIED BY ICAST
P3) 48" - ECC XYPEX CONE w/ 24" HOLE - 30"	1981 lb	
P2) 48" - MH RISER w/XYPEX - 60"	4192 lb	
P1) 48" - MH BASE w/XYPEX - 24"	2890 lb	
1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212	0 lb	
1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.)	0 lb	
1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT	1440 lb	
1) CASTING - JBS 1150 F/C SANITARY	250 lb	
2) 48" - Conseal CS-102 1.00" (Double)	0 lb	
1) 24" - Conseal CS-102 1.00" (Double)	0 lb	
1) PSX - 12-06 NYLO	8 lb	
1) PSX - 8QRS-S NYLO	6 lb	
1) PSX - 12-08 NYLO	8 lb	
10) MH Step ML-10-TDS-NCR - 10"	0 lb	
Structure Total:		10775 lb
Rim: 720.44' Rim to Invert: 9.99' Slack: 1.88" Sump: 3" Step Position: 0°		

Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up (_)	Offset
Invert 1										
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

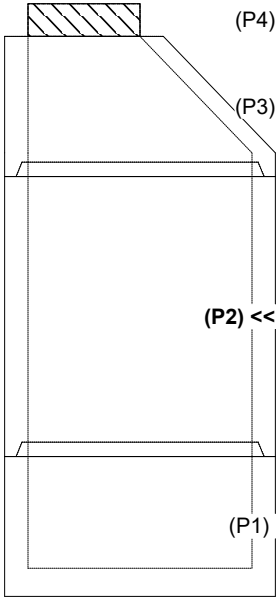


RIGHT-SIDE UP VIEW (int. dimensions)

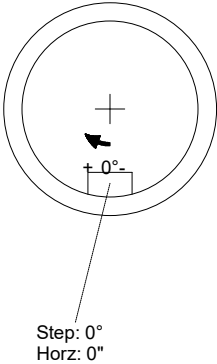

Step: 0°
Horz: 0"

INSIDE WALL DIMENSIONS

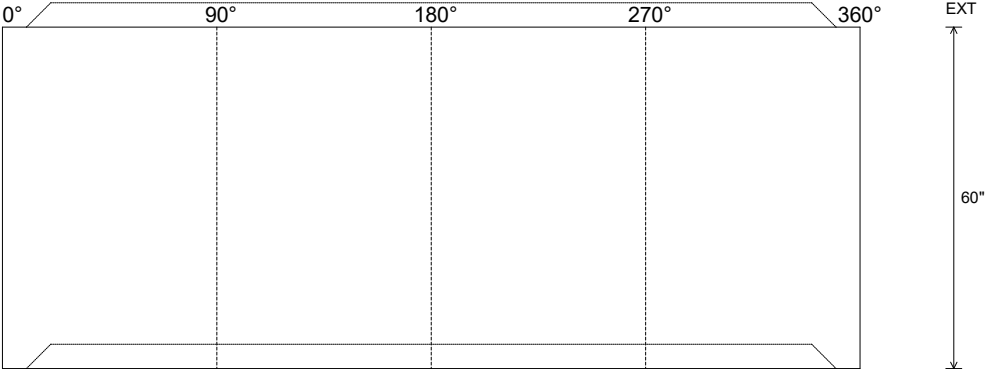

Coating (Int):
Coating (Ext):

Seam Up: Tongue
Seam Dn: Groove

Wall Thickness: 5"
Floor Height: 0"

Height (Int): 60"
Height (Ext): 60"

Weight (Net): 4192 lb
Volume (Net): 1.07cu.yd