



Job Name: 25-4288 - Project Wave Job Location: Franklin, KY 42134 Contractor: Cumberland Pipeline LLC					Plant: 100 8/28/2026 10:29:11 AM		Tech: PC: Erica Bradley				
Structure ID: A9											
P2 MH048RS48XS		MH RISER w/DROP/XYPEX T/G									
P6) 24" - CASTING HEIGHT - 7" P5) 48" - ECC XYPEX CONE w/ 24" HOLE F/G - 36" P4) 48" - MH RISER w/XYPEX T/G - 60" P3) 48" - MH RISER w/XYPEX T/G - 60" P2) 48" - MH RISER w/DROP/XYPEX T/G - 48" P1) 48" - MH BASE w/DROP/XYPEX T/n - 24" 1) JOINT WRAP - 0.065"x6"x50' CONSEAL CS212 1) JOINT WRAP PRIMER - CONSEAL CS-75 (1 gal.) 1) 48" - MH INVERT CHANNEL w/XYPEX - FULL HEIGHT 1) CASTING - JBS 1150 F/C SANITARY 4) 48" - Conseal CS-102 1.00" (Double) 1) 24" - Conseal CS-102 1.00" (Double) 2) PSX - 12-08 NYLO 1) Drop Tee - 6" PVC 1) Drop Elbow - 6" PVC 19) MH Step ML-10-TDS-NCR - 10"					0 lb 2251 lb 4192 lb 4192 lb 3339 lb 2897 lb 0 lb 0 lb 1440 lb 250 lb 0 lb 0 lb 0 lb 16 lb 0 lb 0 lb 0 lb 0 lb 18577 lb		Structure Notes: 1. PER ASTM C-478 SPECIFICATIONS 2. CONCRETE: 4,000 PSI AT 28 DAYS 3. REINFORCEMENT: PER ASTM A615 4. INVERT CHANNEL REQUIRED 5. STEPS AT 0 DEGREES 6. JBS 1150 FRAME & COVER "SANITARY" SUPPLIED BY ICAST 7. EXTERIOR DROP @ 90 DEGREES.				
Rim: 727.61' Rim to Invert: 19.53' Slack: 1.36' Sump: 2" Step Position: 0'					Structure Total:						
Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset	
Invert 1											
Invert 2											
Invert 3	712.19'	90°	45.553"	6" PVC SDR35	6.25"	Drop Tee 6" PVC	6.5"	6.52"	22.82"	0"	
Invert 4											
Invert 5											
Invert 6											
Invert 7											
Invert 8											

RIGHT-SIDE UP VIEW (int. dimensions)

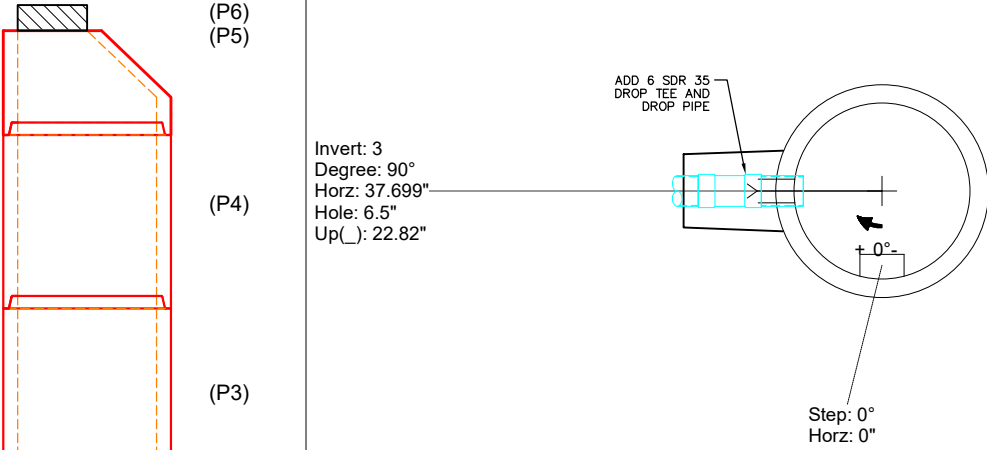

INSIDE WALL DIMENSIONS

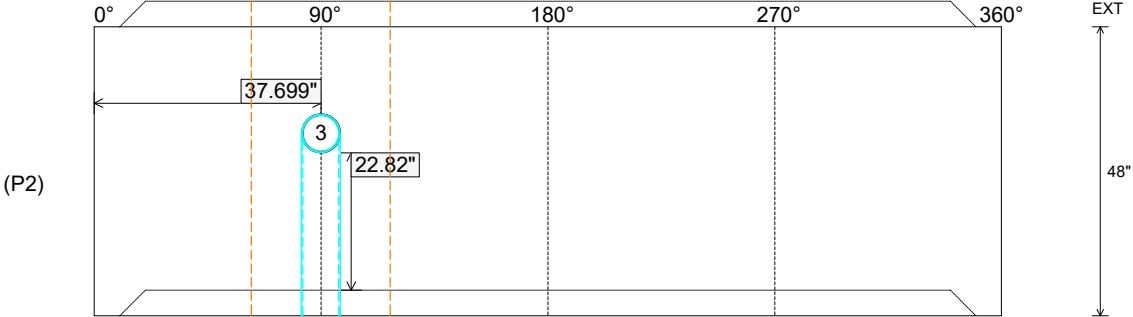

Coating (Int): Coating (Ext):	Seam Up: Tongue Seam Dn: Groove	Wall Thickness: 5" Floor Height: 0"	Height (Int): 48" Height (Ext): 48"	Weight (Net): 3339 lb Volume (Net): 0.85cu.yd
----------------------------------	------------------------------------	--	--	--