

| | | | |
|-----------------------------------------------|----------------------|------------------|------------------------------------------------------------------------------------|
| Job Name: 25-4299 - Seneca High School | Plant: 100 | Tech: J. Horsley |  |
| Job Location: Louisville, KY | 2/16/2026 3:52:05 PM | PC: J. Jarvis | |
| Contractor: Dan Cristiani Excavating Co. Inc. | | | |

Structure ID: G2

P2 MH072RS24

MH RISER T/G

| | |
|-------------------------------------------------|----------|
| P4) 24" - CASTING HEIGHT - 7" | 0 lb |
| P3) 72" - MH FLAT LID w/24in ECC Hole F/G - 15" | 5098 lb |
| P2) 72" - MH RISER T/G - 24" | 3499 lb |
| P1) 72" - MH BASE Custom Ht T/n - 70" | 11392 lb |
| 2) 72" - Conseal CS-102 1.00" | 0 lb |
| 1) Hole - 54 | 0 lb |
| 1) Hole - 24 | 0 lb |
| 1) Hole - 44 | 0 lb |
| 7) MH Step ML-10-TDS-NCR - 10" | 0 lb |
| Structure Total: | 19988 lb |



Structure Notes:

- PER LOUISVILLE MSD / ASTM C-478 SPECIFICATIONS
- CONCRETE: 4,000 PSI AT 28 DAYS
- REINFORCEMENT: PER ASTM A615
- STEPS AT 180 DEGREES
- HOE MC-420 FRAME & COVER "STORM LOU-MSD" SUPPLIED BY OTHERS


Rim: 485.2' Rim to Invert: 9.35' Slack: 0.7" Sump: 4.5" Step Position: 180°

| Position | Elev | Angle | Ext. (cw) | Pipe | Pipe OD | Connector | Hole | Horz Size | Up () | Offset |
|----------|------|-------|-----------|------|---------|-----------|------|-----------|--------|--------|
| Invert 1 | | | | | | | | | | |
| Invert 2 | | | | | | | | | | |
| Invert 3 | | | | | | | | | | |
| Invert 4 | | | | | | | | | | |
| Invert 5 | | | | | | | | | | |
| Invert 6 | | | | | | | | | | |
| Invert 7 | | | | | | | | | | |
| Invert 8 | | | | | | | | | | |

RIGHT-SIDE UP VIEW (int. dimensions)

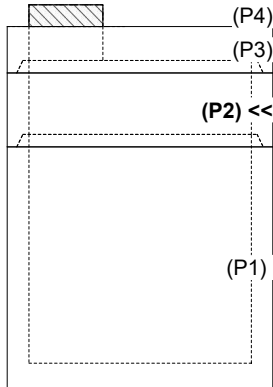

INSIDE WALL DIMENSIONS



| | | | | |
|----------------------------------|------------------------------------|----------------------------------------|----------------------------------------|--------------------------------------------------|
| Coating (Int): Coating (Ext): | Seam Up: Tongue Seam Dn: Groove | Wall Thickness: 7" Floor Height: 0" | Height (Int): 24" Height (Ext): 24" | Weight (Net): 3499 lb Volume (Net): 0.89cu.yd |
|----------------------------------|------------------------------------|----------------------------------------|----------------------------------------|--------------------------------------------------|