
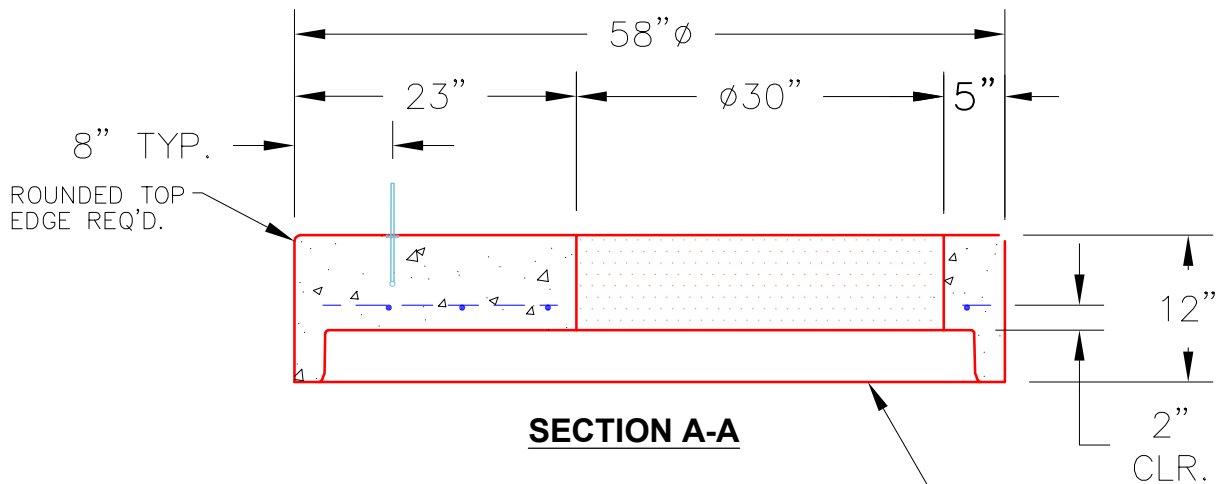


THIS DRAWING IS INTENDED TO BE PRINTED IN COLOR.

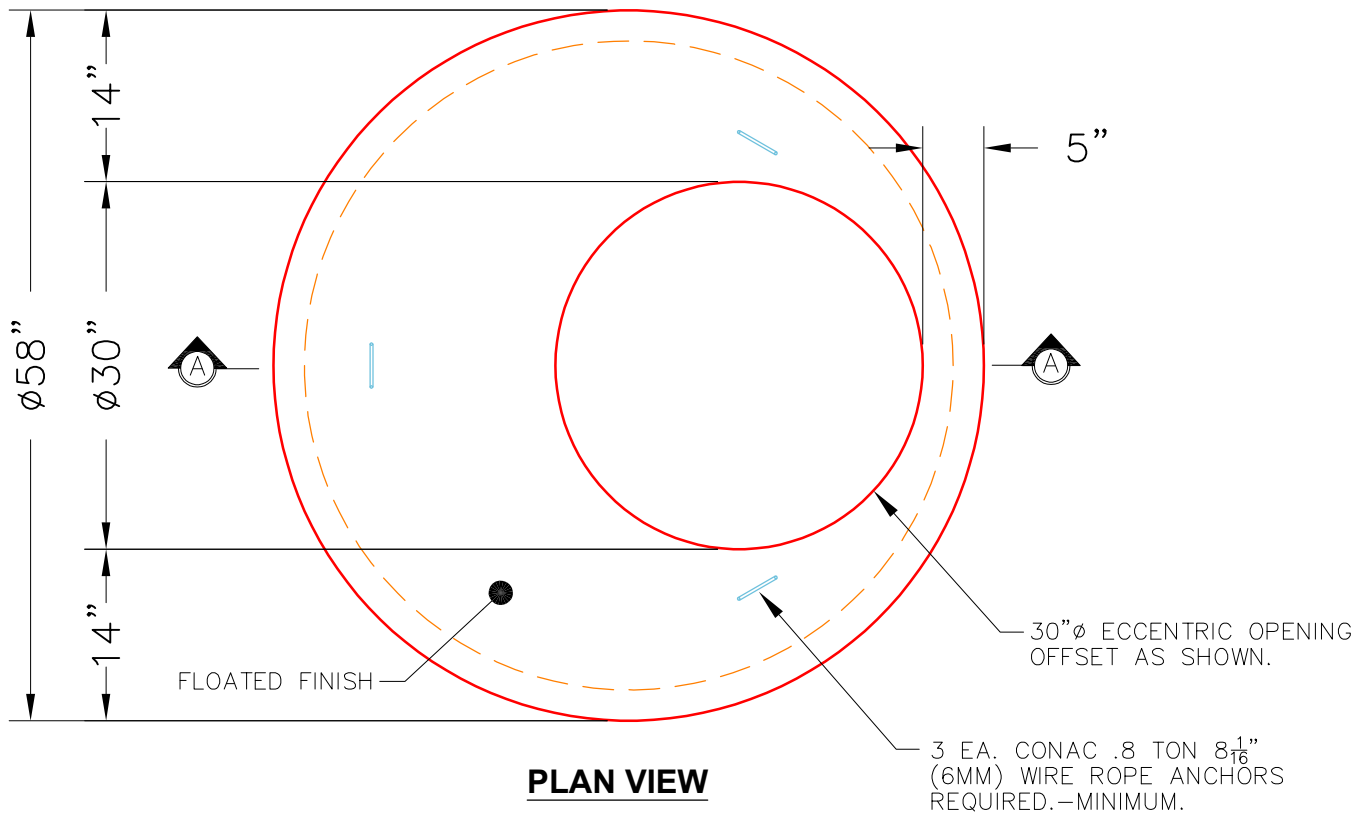

**NOTES:**

1. MANUFACTURED TO ASTM C-478 (LATEST REVISION).
2. CONCRETE: 5,000 PSI AT 28 DAYS.
3. REINFORCING: #4 BAR @ 10" O.C. E.W. (GRADE 60).

<p>PRODUCTION WORK ORDER</p>		<p>PRODUCT I.D.: MH048LD12-30</p>	<p>DESCRIPTION: 48" <math>\phi</math> X 12" MH TOP SLAB SPECIAL</p>	
	<p>QUALITY CONTROL CHECKLIST</p>	<p>PRODUCT VIEW: RIGHT SIDE UP</p>	<p>CUSTOMER: CONTECH ENGINEERING SOLUTIONS</p>	
	<input type="checkbox"/> ALL DIMENSIONS CORRECT.	<p>PLANT: BEAVER DAM, KY.</p>	<p>PROJECT: 694743 ASSUMPTION GREEK ORTHODOX CHURCH</p>	
	<input type="checkbox"/> LIFTERS INSTALLED.	<p>WEIGHT: 1,413 LBS.</p>	<p>STRUCTURE: 10-CS-4</p>	
	<input type="checkbox"/> HOLE LOCATION CORRECT.	<p>TOP SECTION JOINT: N/A</p>	<p>QUOTE/SALES ORDER NO: 25-4329</p>	
	<input type="checkbox"/> REINFORCING CORRECT.	<p>BASE SECTION JOINT: GROOVE</p>	<p>PC: T. SEKULA</p>	<p>DRAWING: J. COPPAGE</p>
	<input type="checkbox"/> FINISH ON SLAB SURFACE UNIFORM.	<p>QC CHECK INITIALS:</p>	<p>DATE: 10/30/25</p>	<p>SCALE: NTS</p>
<input type="checkbox"/> OUTSIDE TOP EDGE TROWELLED.				
<input type="checkbox"/> GROOVE JOINT INSTALLED.				