

Job Name: 25-4337 - Maywood Phase13 Job Location: Bardstown, KY Contractor: Buzick Construction	Plant: 100 12/9/2025 11:21:23 AM	Tech: J. Horsley - F PC: C. Goff	
---	-------------------------------------	-------------------------------------	--

Structure ID: CB1

P1 BX3636-08BAVF

BOX BASE 8inW, 8inF, Variable Ht F/n

- P2) 36" x 36" - CASTING HEIGHT - 3"
- P1) 36" x 36" - BOX BASE 8inW, 8inF, Variable Ht F/n - 30"
- 1) 36" x 36" - Conseal CS-102 1.00"
- 1) Hole - 20"

0 lb
5149 lb
0 lb
0 lb

Structure Total: 5149 lb



- Structure Notes:
1. PER ASTM C-913 SPECIFICATIONS
 2. CONCRETE: 4,000 PSI AT 28 DAYS
 3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" MIN. REBAR CLEARANCE (TYP)
 4. NO STEPS AND NO INVERT CHANNEL
 5. CASTING SUPPLIED BY OTHERS (HOE 595 FRAME & GRATE)

Rim: 703.61' Rim to Invert: 2.8' Slack: 0.6" Sump: 0" Step Position:


Position	Elev	Angle	Ext. (cw)	Pipe	Pipe OD	Connector	Hole	Horz Size	Up ()	Offset
Invert 1	700.81'	0°	26"	15" HDPE	17.6"	Hole 20	20"	20"	-1.3"	0"
Invert 2										
Invert 3										
Invert 4										
Invert 5										
Invert 6										
Invert 7										
Invert 8										

RIGHT-SIDE UP VIEW (int. dimensions)

UPSIDE-DOWN VIEW (int. dimensions)

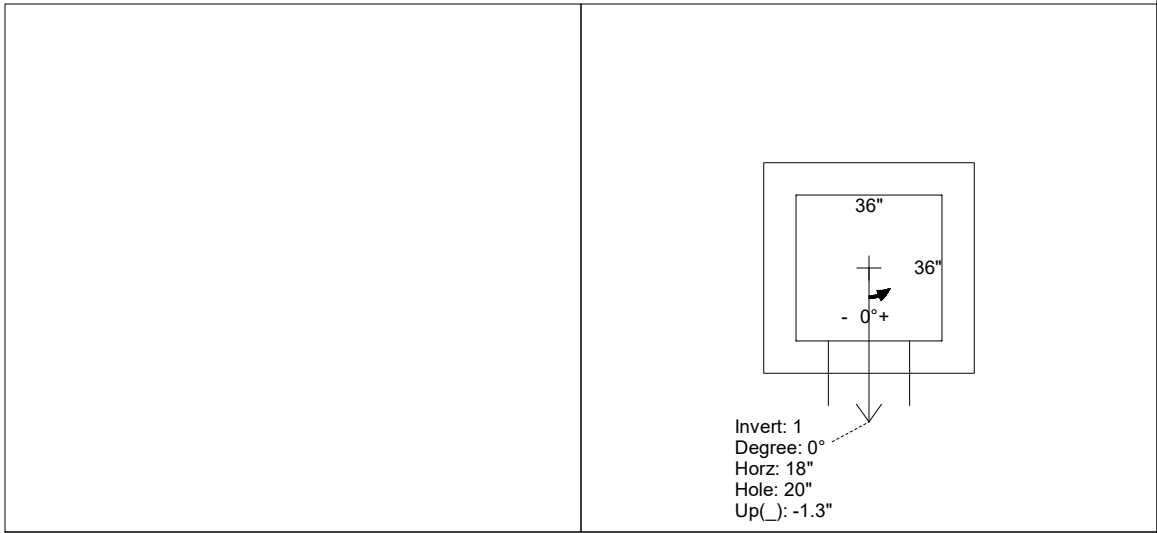

INSIDE WALL DIMENSIONS

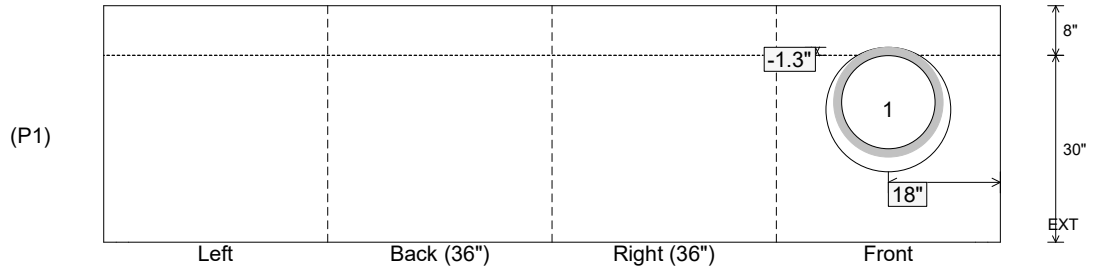

Coating (Int): Coating (Ext):	Seam Up: Flat Seam Dn: n/a	Wall Thickness: 8" Floor Height: 8"	Height (Int): 30" Height (Ext): 38"	Weight (Net): 5149 lb Volume (Net): 1.32cu.yd
----------------------------------	-------------------------------	--	--	--