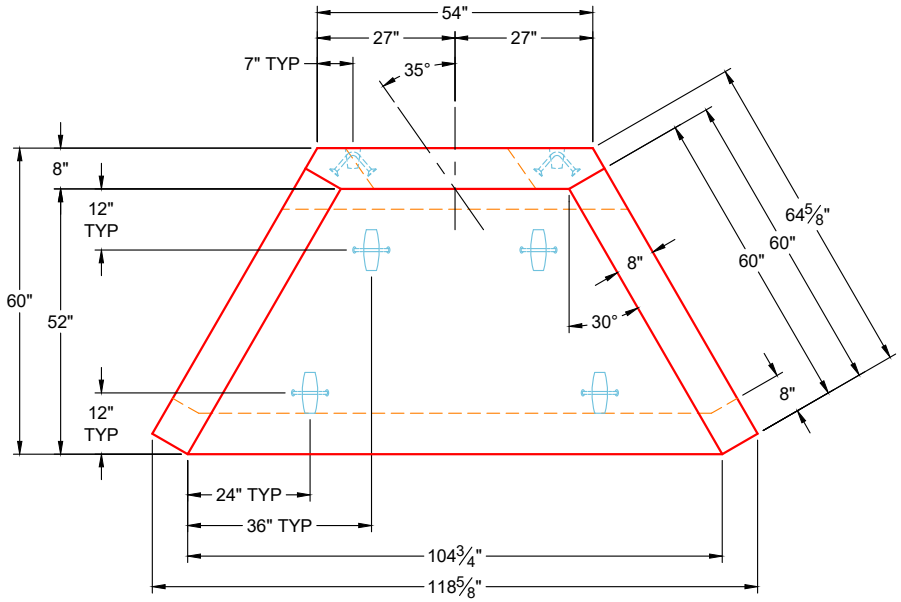

PLAN VIEW

GENERAL NOTES:

1. USE THIS DRAWING IN CONJUNCTION WITH KYTC STANDARD DRAWINGS RDH-110-02 & RDH-210-03
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCEMENT: #5 BAR @ 12" C.C. E.W. (GRADE 60) - 2" REBAR CLEARANCE (MIN.)
4. REINFORCING BARS TO BE TACK WELDED OR TIED
5. 3/4" CHAMFER ON ALL EXPOSED EDGES
6. WEIGHT: 7,970 LBS
7. USE STANDARD 30" / 36" PIPE CULVERT HEADWALL FORM

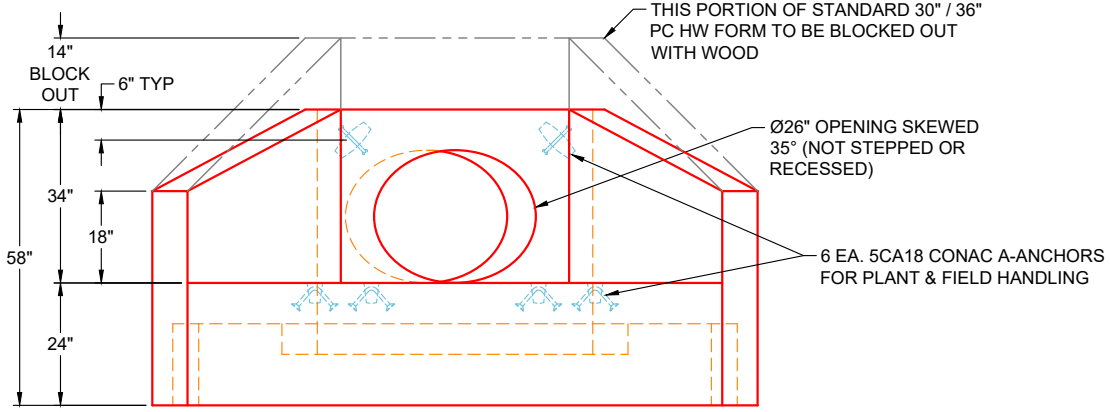

FRONT VIEW

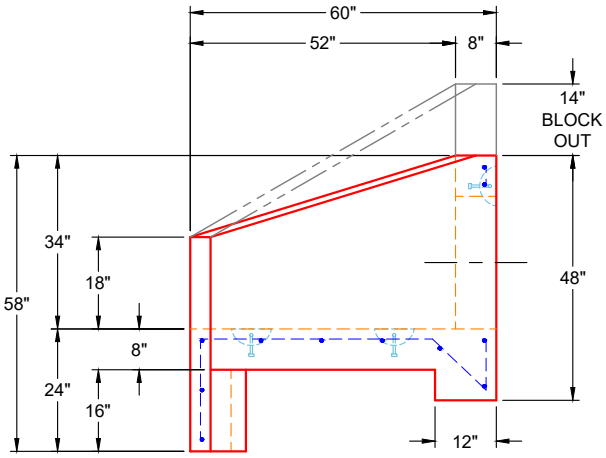

SIDE VIEW

PRODUCTION WORK ORDER	PRODUCT I.D.: HWPCCUS	DESCRIPTION: 30" PIPE CULVERT HEADWALL FOR 18" PIPE - 35° SKEW	
QUALITY CONTROL CHECKLIST	PRODUCT VIEW: RIGHT SIDE UP	CUSTOMER: DIRT WORKS UNLIMITED, LLC	
☐ ALL DIMENSIONS CORRECT.	PLANT: BEAVER DAM, KY	PROJECT: FOXBOROUGH STORM PHASE 2	
☐ LIFTERS INSTALLED.	WEIGHT: 7,970 LBS	STRUCTURE: HW 6	
☐ OPENING CENTERED.	TOP SECTION JOINT: N / A	ORDER NO: 25-4339	
☐ REINFORCING CORRECT.	BASE SECTION JOINT: N / A	PE: J.H. ROSS	DRAWING: K. CARDWELL
☐ SURFACE QUALITY ACCEPTABLE.	QC CHECK INITIALS:	DATE: 12/19/25	SCALE: NTS / PG. 1 OF 1
☐ EDGES CHAMFERED.			
☐ ALL PATCHWORK ACCEPTABLE.			

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.