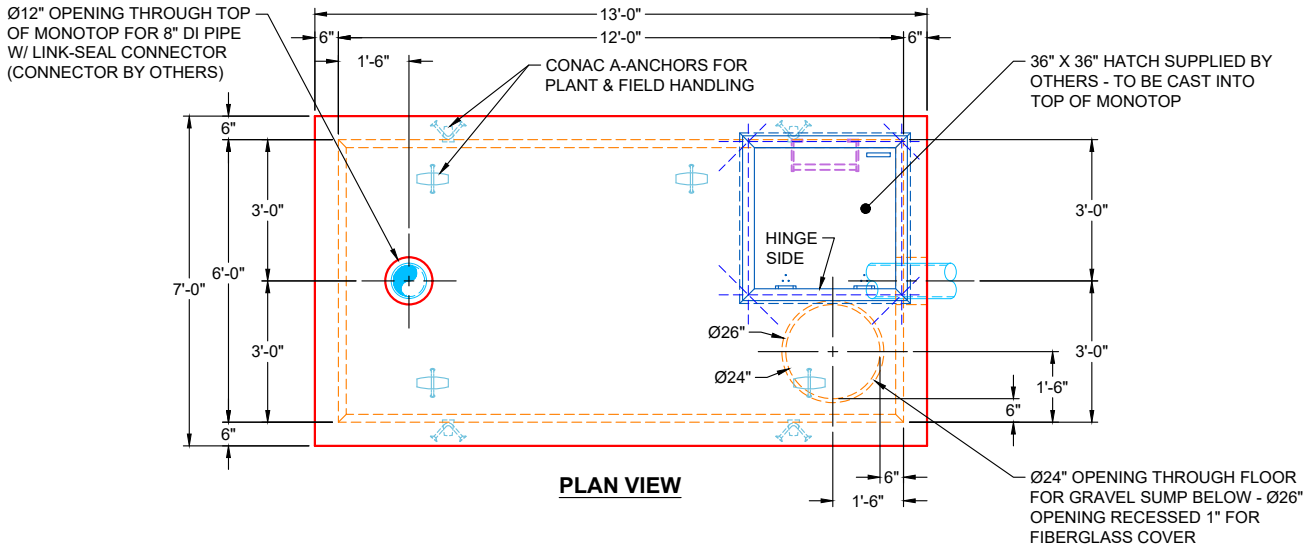

PLAN VIEW

GENERAL NOTES:

1. MANUFACTURED PER ASTM C-913 SPECIFICATIONS
2. CONCRETE: 5,000 PSI AT 28 DAYS
3. REINFORCEMENT:
   - MONOTOP WALLS & TOP: #5 BAR @ 6" C.C. E.W. (GRADE 60)
   - BASE WALLS & FLOOR: #5 BAR @ 6" C.C. E.W. (GRADE 60)
4. TOTAL WEIGHT: 34,740 LBS
   - MONOTOP (6" WALLS & 6" TOP): 17,325 LBS
   - BASE (6" WALLS & 6" FLOOR): 17,415 LBS
5. JOINTS SEALED WITH CONSEAL CS-102 1" BUTYL (PRIMARY & SECONDARY ROWS) & CS-212 6" EXTERIOR WRAP
6. ANY REQUIRED COATINGS, LINERS, OR ADMIXTURES TO BE SUPPLIED BY OTHERS
7. 36" X 36" HATCH SUPPLIED BY OTHERS - TO BE CAST INTO TOP OF MONOTOP
8. ALUMINUM LADDER & SAFETY POST SUPPLIED BY OTHERS
9. LINK-SEAL CONNECTORS SUPPLIED BY OTHERS

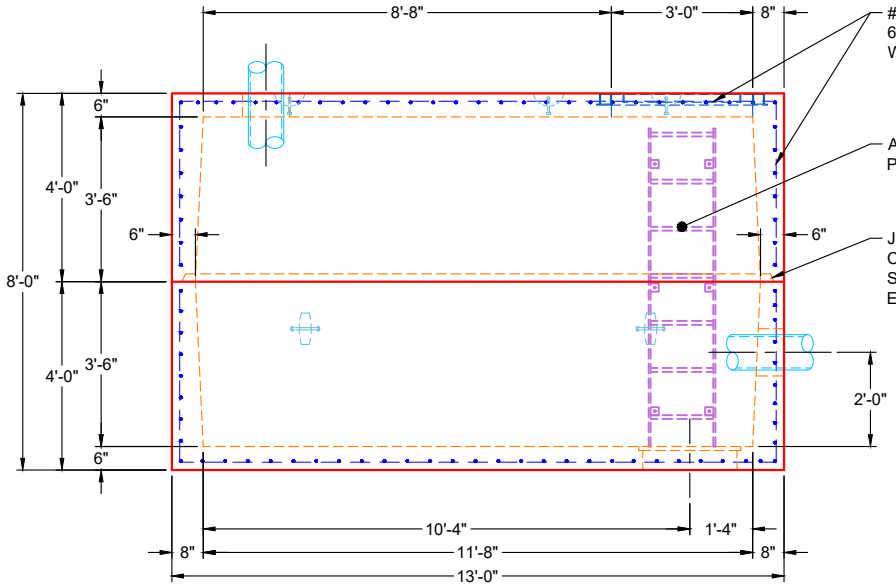

FRONT VIEW

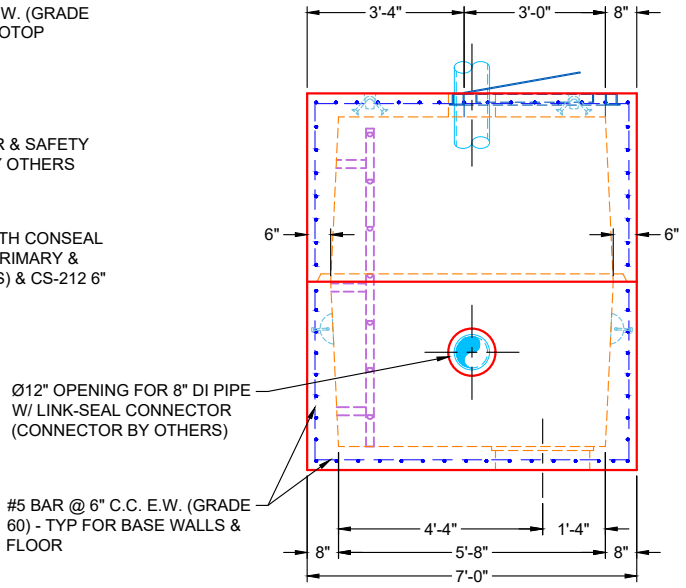

SIDE VIEW

REVISION INFORMATION	
REV. 0 DATE:	NO REVISIONS TO DATE

SUBMITTAL DRAWING: 72" X 144" WELL VAULT	
CUSTOMER: STRIEGEL DESIGN & CONSTRUCTION	
PROJECT: 2025 NEW WELL FIELD	
STRUCTURE: 2-54406-10	
QUOTE/SALES ORDER NO: 25-4406	
CHECKED BY: B. SMITH	DRAWN BY: K. CARDWELL
DATE: 02/11/26	SCALE: NTS — PG. 1 OF 1

THIS DRAWING IS THE PROPERTY OF INFRASTRUCTURE PRECAST, INC. ANY USE OR DUPLICATION OF THIS DRAWING WITHOUT PRIOR AUTHORIZATION IS STRICTLY PROHIBITED.