

Contractor: William & Charles Construction, LLC

TECH: Jared - F

Plant: 100




Slack: 1.85"

- FLOOR (As .31) #5 BARS AT 12" C.C.E.W.

2) Hole - 22


0 lb

Structure Total: 7131 lb

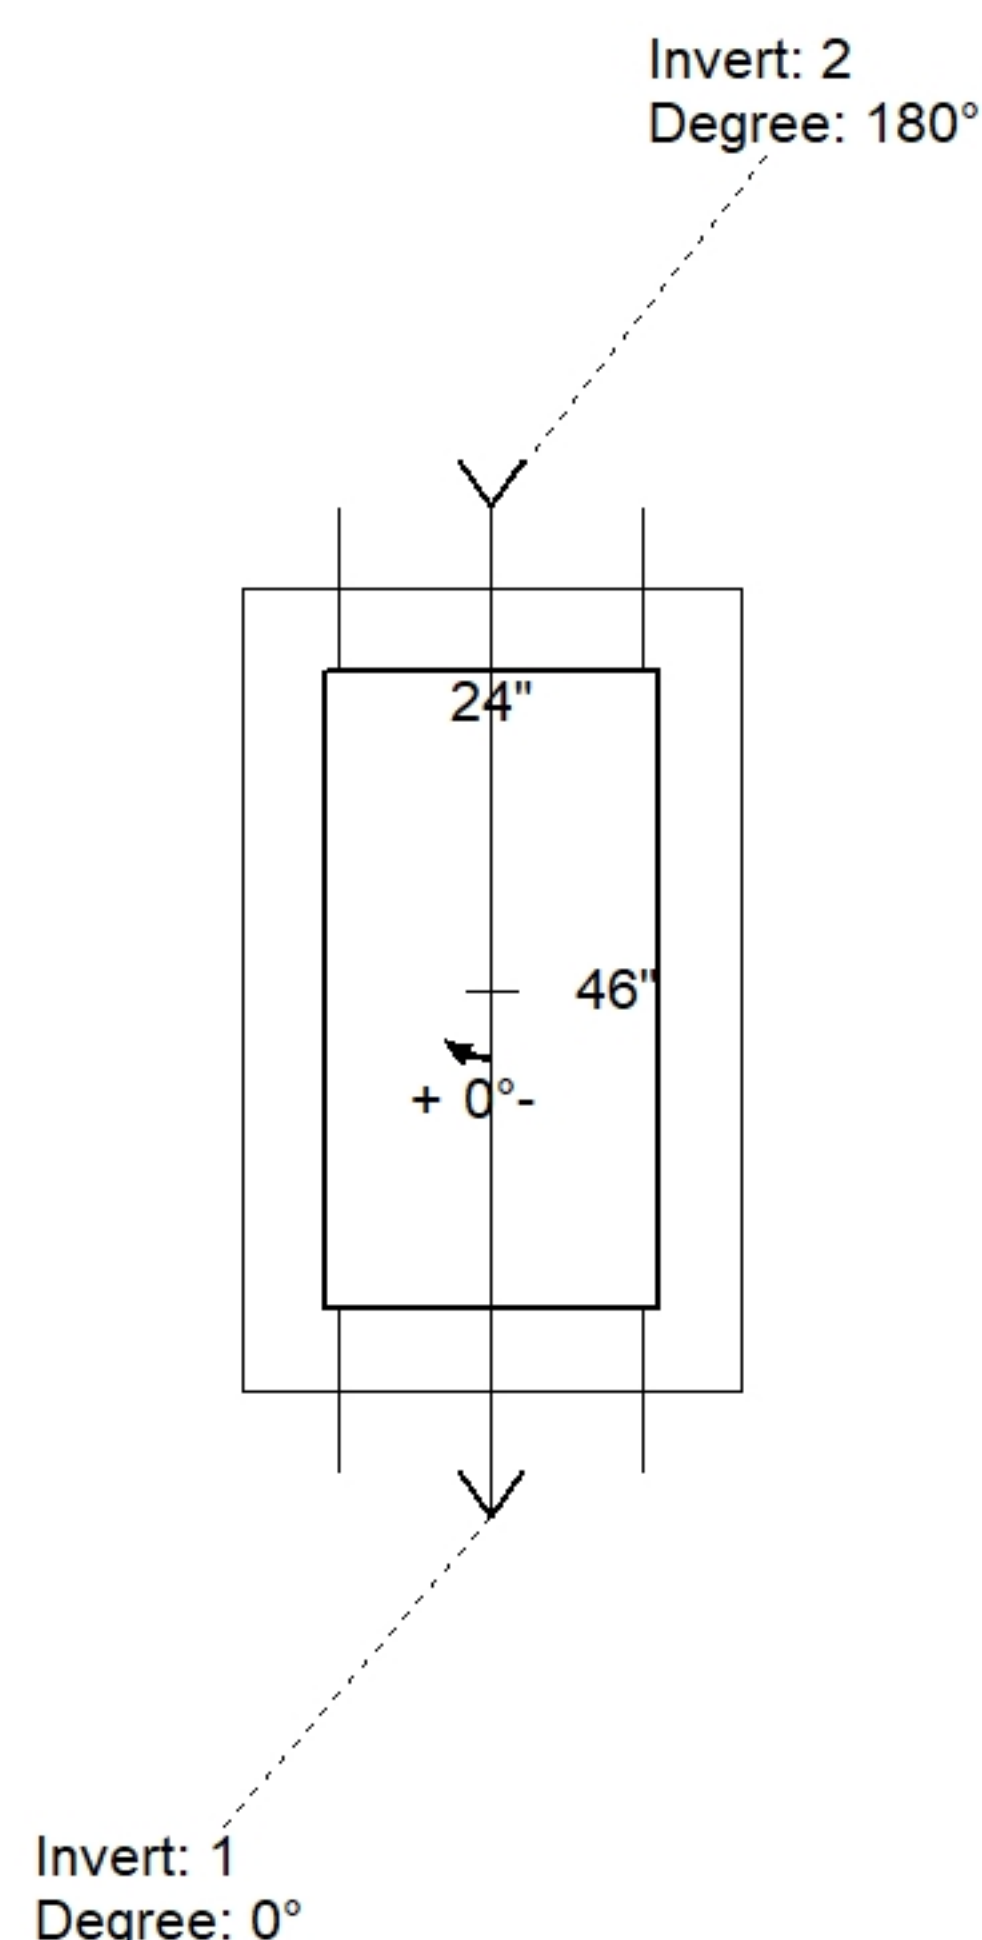

Position	Elev	Angle	Pipe	Pipe OD	Hole	Connector	Up ()	Ref
Rim	849.99'							
Reducer								
Invert 1	843.44'	0°	15" RCP B WALL	19.5"	22"	Hole 22	0"	P1
Invert 2	843.54'	180°	15" RCP B WALL	19.5"	22"	Hole 22	1.2"	P1
Invert 3								
Invert 4								
Invert 5								
Invert 6								
Invert 7								
Invert 8								

Default - Interior Dimensions

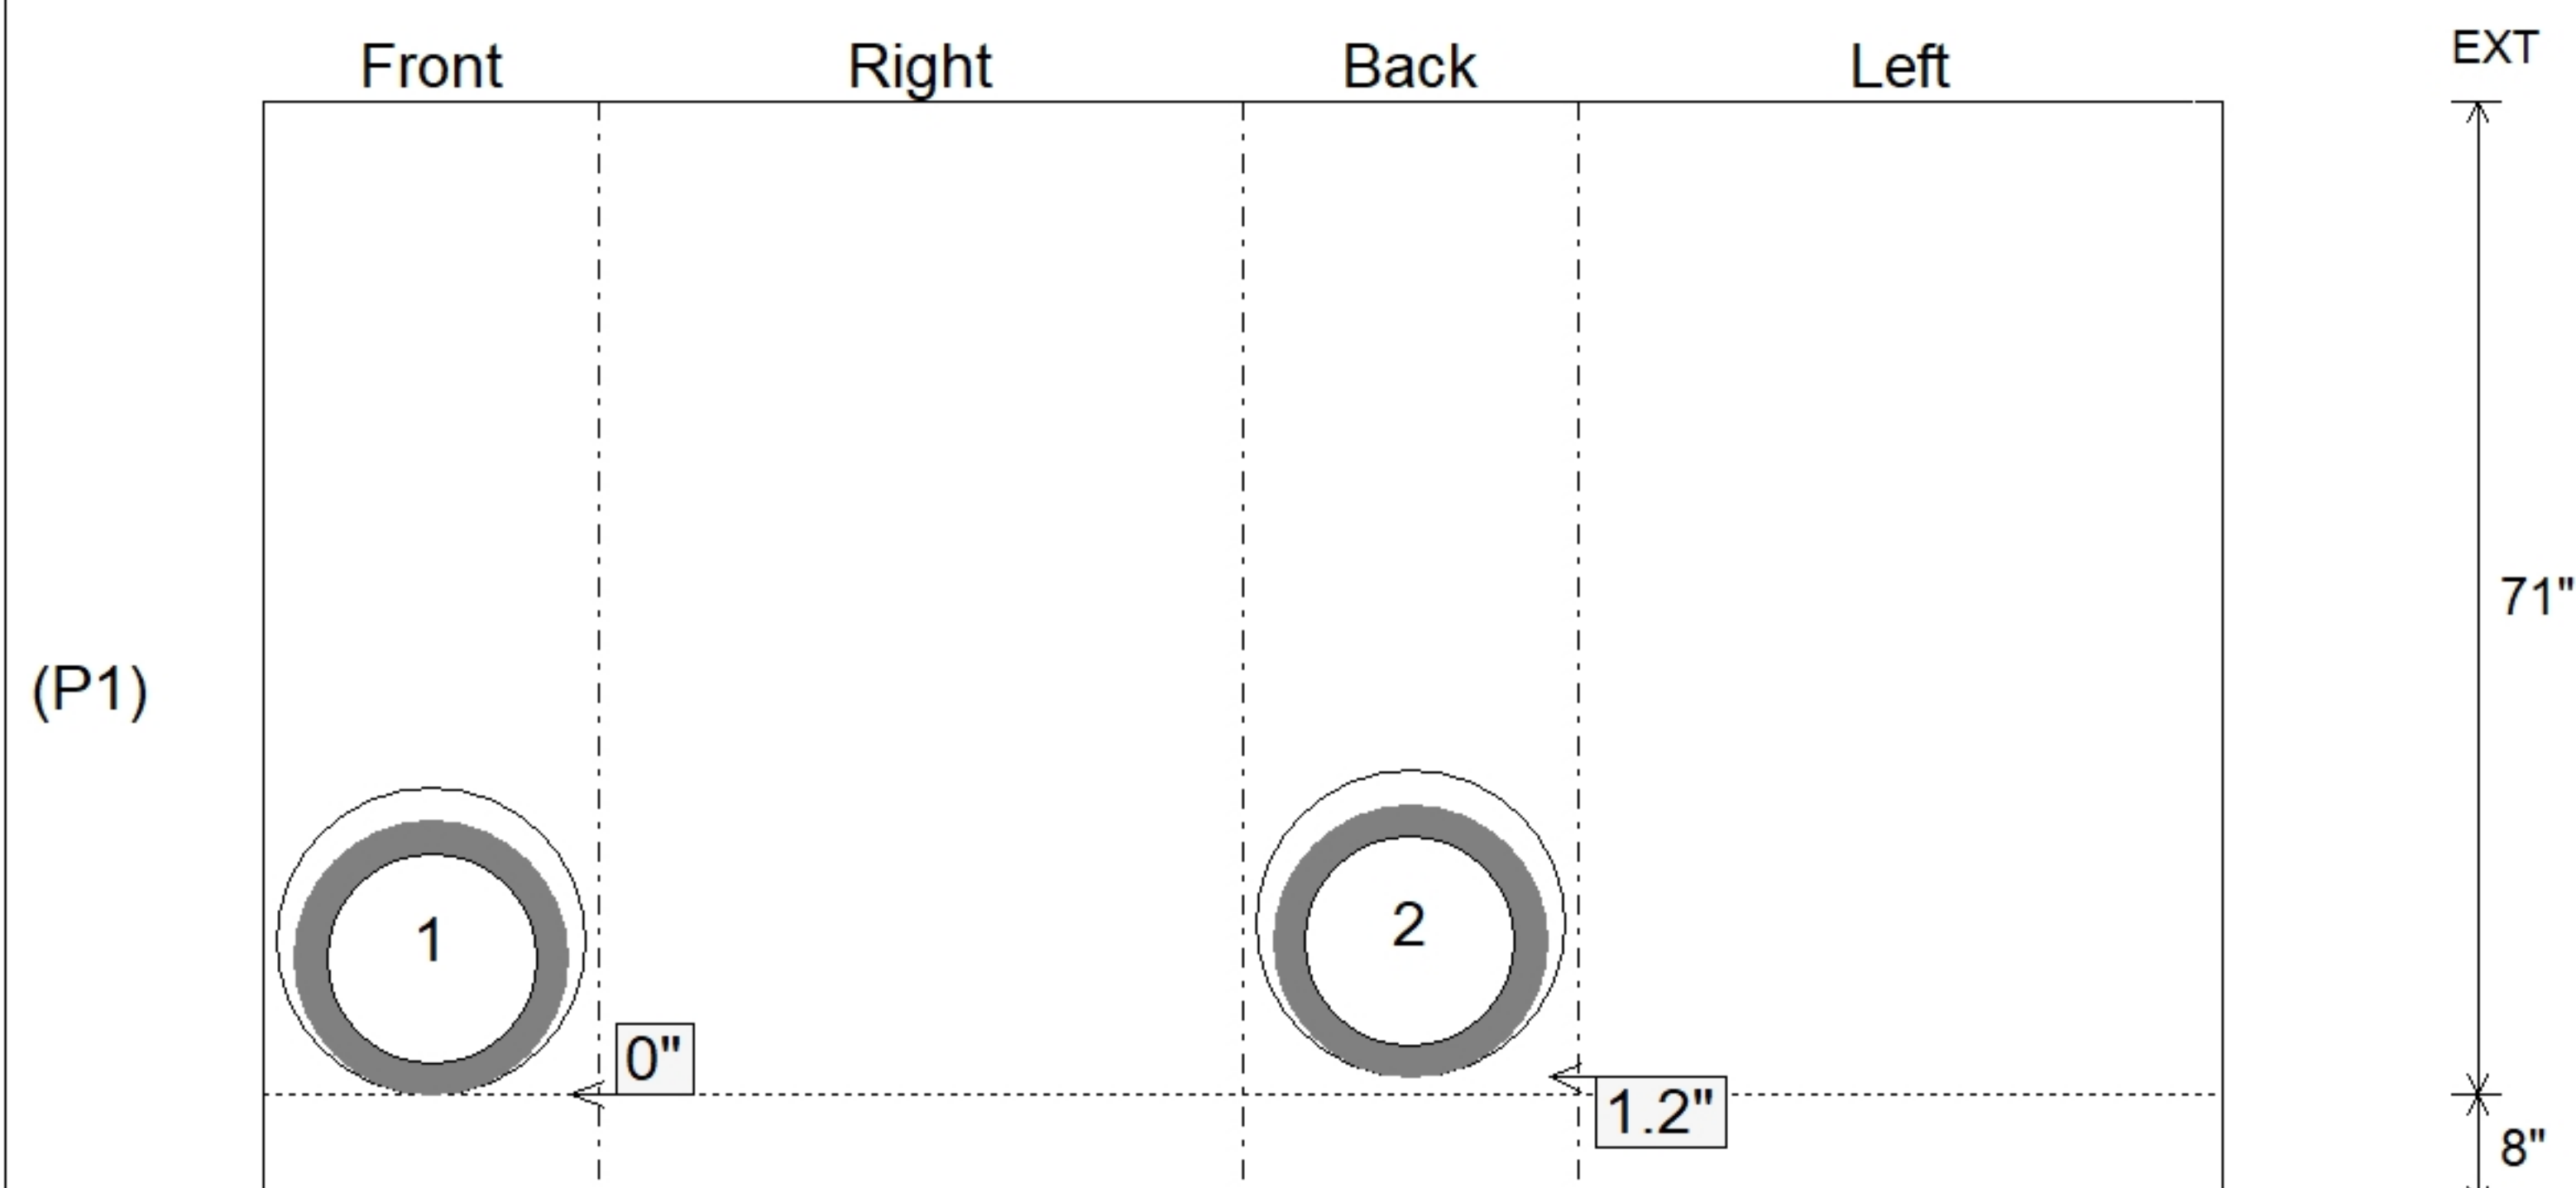

SUBMITTAL
APPROVED BY: