
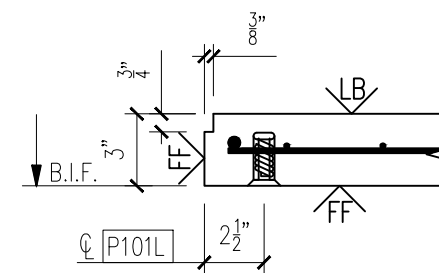
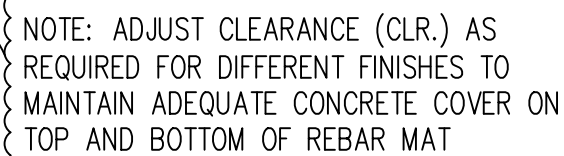


1 Required



DATE:


ERECTION

<u>PRODUCT</u>	<u>SALES ORDER NUMBER</u>
BUILDING	STANDARD
<u>SHEET NUMBER</u>	<u>NUMBER REQUIRED</u>
1 OF 2	1


CE MARK
KPG-12

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com
www.EasiSet.com • 800-547-4045 • Fax 540-439-2541


25-4460
Olin Chemical Building
ID - CVW
REAR WALL - BKPG-12
Weight - 4,415 LBS Each
1 Required

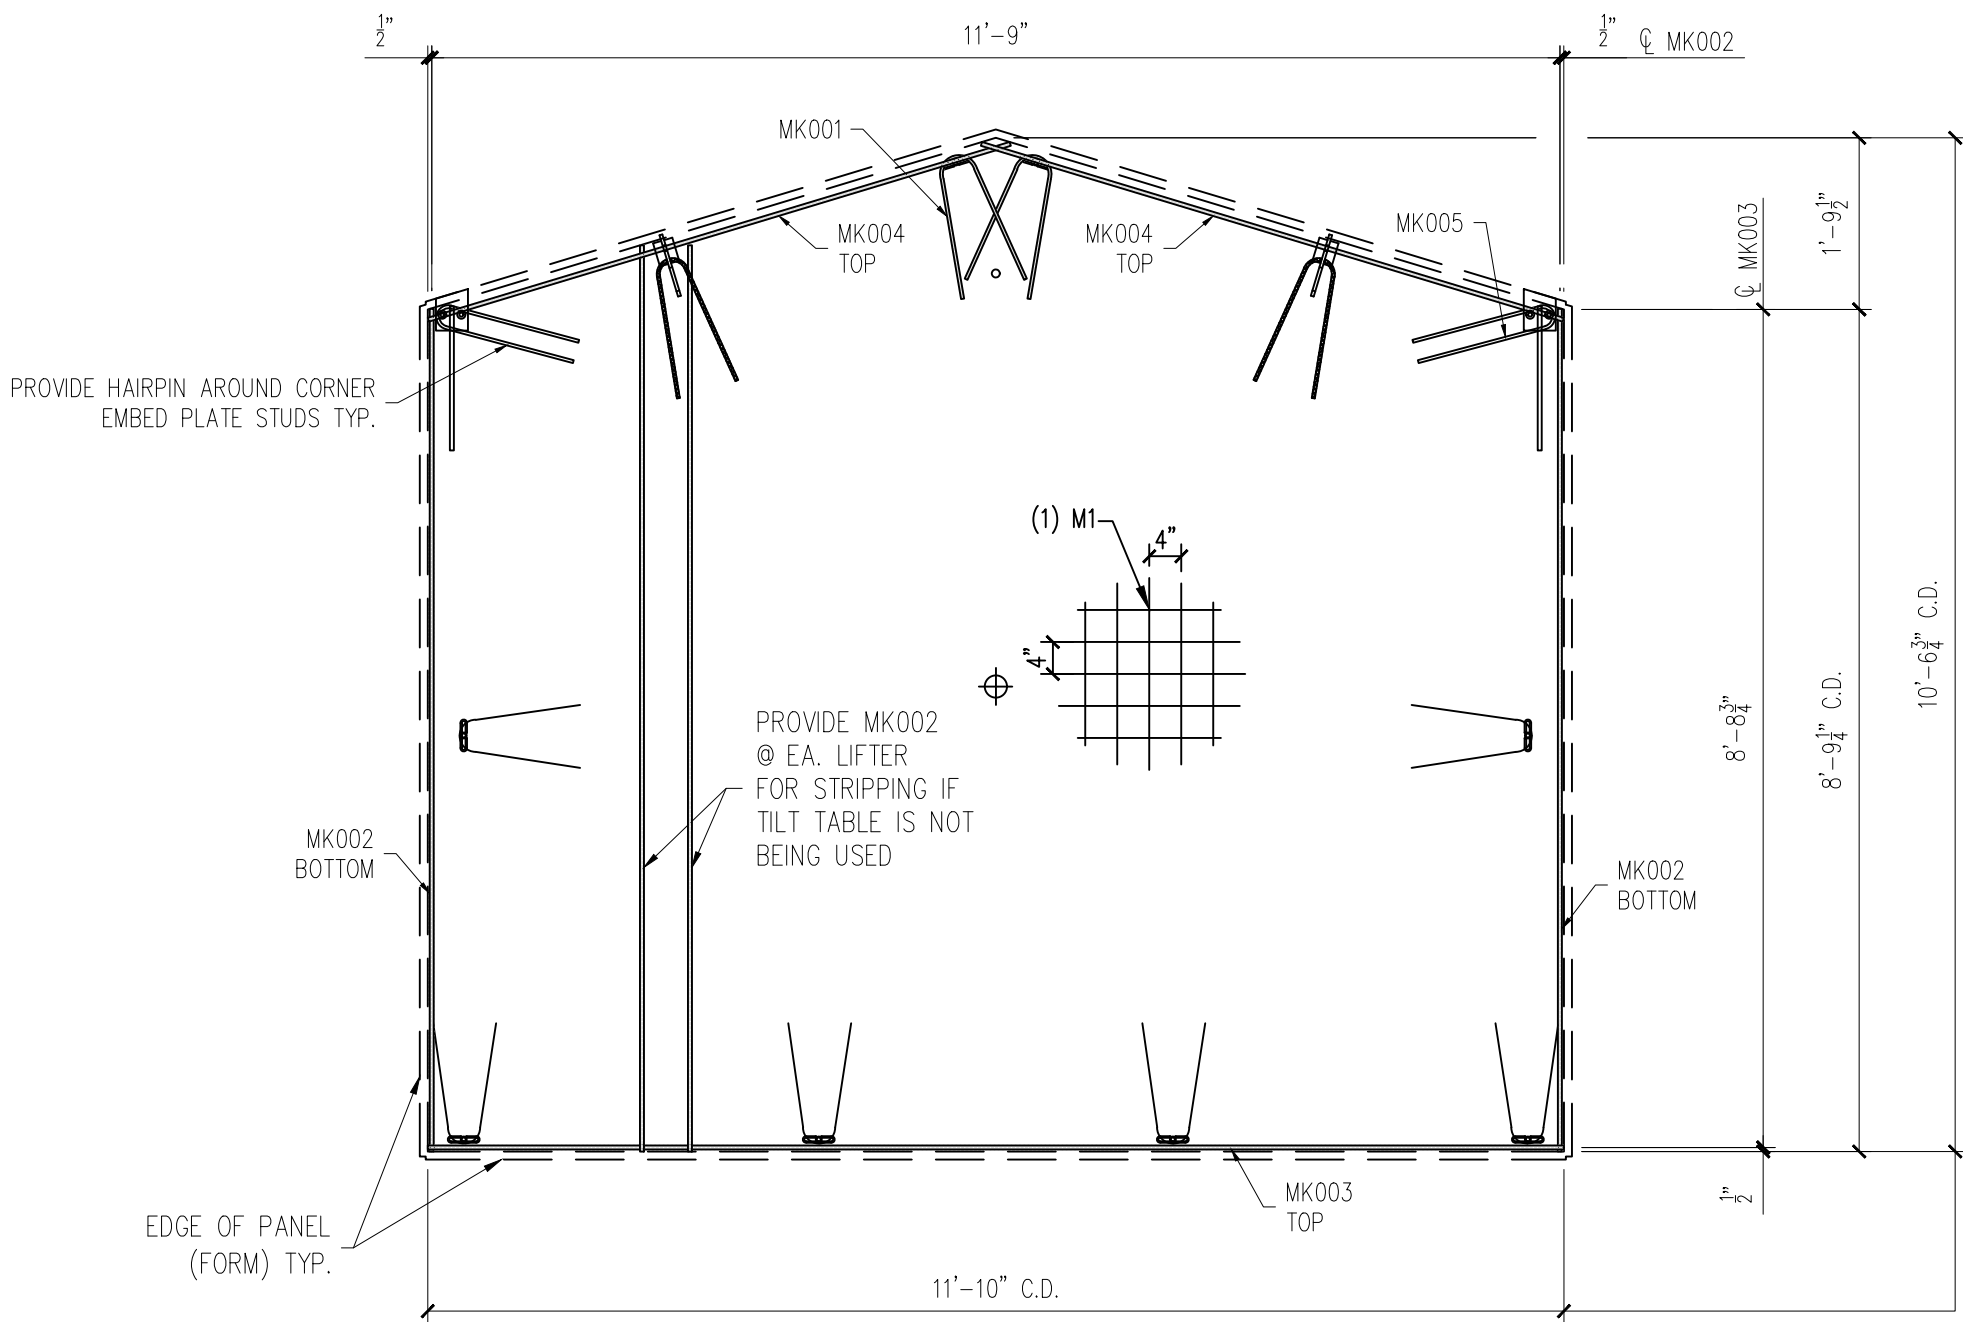

REINFORCING VIEW
SCALE: 1/2" = 1'-0"

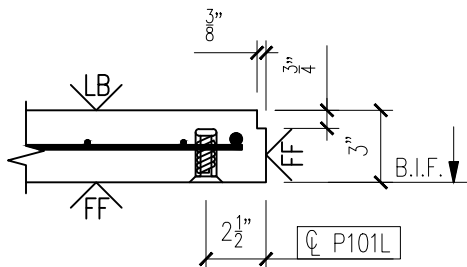

6

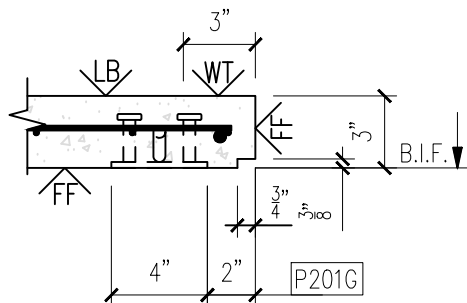

7

MESSAGE CENTER

1. REFER TO DETAILS AND SECTION FOR REINFORCEMENT PLACEMENT
2. SUPPLEMENTAL STEEL FOR STRIPPING AND HANDLING MAY BE ADDED AS REQUIRED.

CHECKED BY: DATE:
APPROVED BY: DATE:

NOTE:
1. CONSTRUCT REBAR-MESH CAGE ACCORDING TO THE DRAWINGS. SECURE LIFTING APPARATUS TO FORM AND ADD PROPER REINFORCEMENT. PLACE REBAR-MESH CAGE AND HAIRPINS AT INSERTS WITH PROPER CLEARANCES (PER DRAWINGS).

PRODUCT	SALES ORDER NUMBER
BUILDING	STANDARD
SHEET NUMBER	NUMBER REQUIRED
2 OF 2	1

REINFORCING SCHEDULE		
MARK #	DESCRIPTION	QTY.
MK001	#3 X 3'-0"	10
MK002	#3 X 8'-9 3/4"	2
MK003	#3 X 11'-10"	1
MK004	#3 X 6'-4"	2
MK005	#3 X 3'-1"	2

MESH SCHEDULE		
MARK #	DESCRIPTION	QTY.
M1	W4XW4 4"X4" WWF 11'-10" X 10'-6 3/4"	1

REV	DATE				
	INI.	1	2	3	4

PROJECT: 10'-0" x 12'-0" x 9'-0"
EASI - SET CABLED BUILDING
CONTRACTOR: -

SCALE
NTS
DRAWN BY
FTL
CHECK BY
WCR
ISSUE DATE
06.12.26
PIECE MARK
BKPG-12

EASI
SET
WORLDWIDE

EASI-SET®
WORLDWIDE

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com
www.EasiSet.com • 800-547-4045 • Fax 540-439-2541