
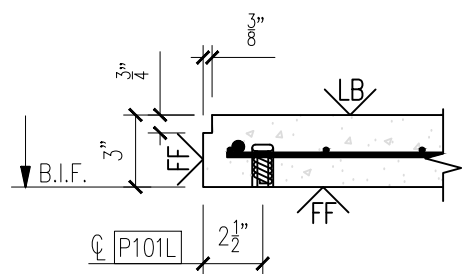
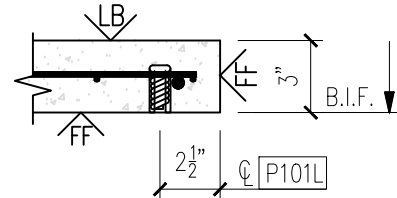
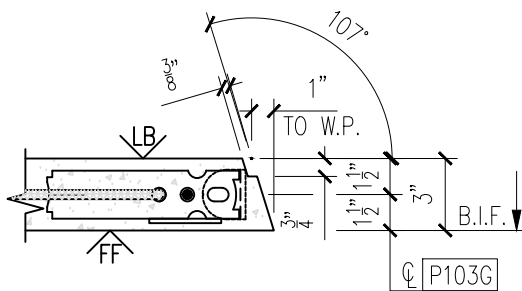
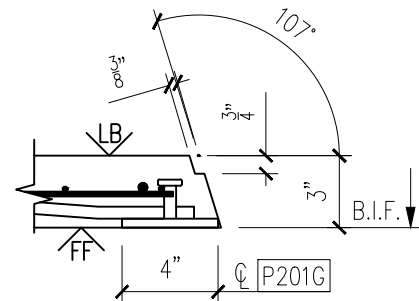
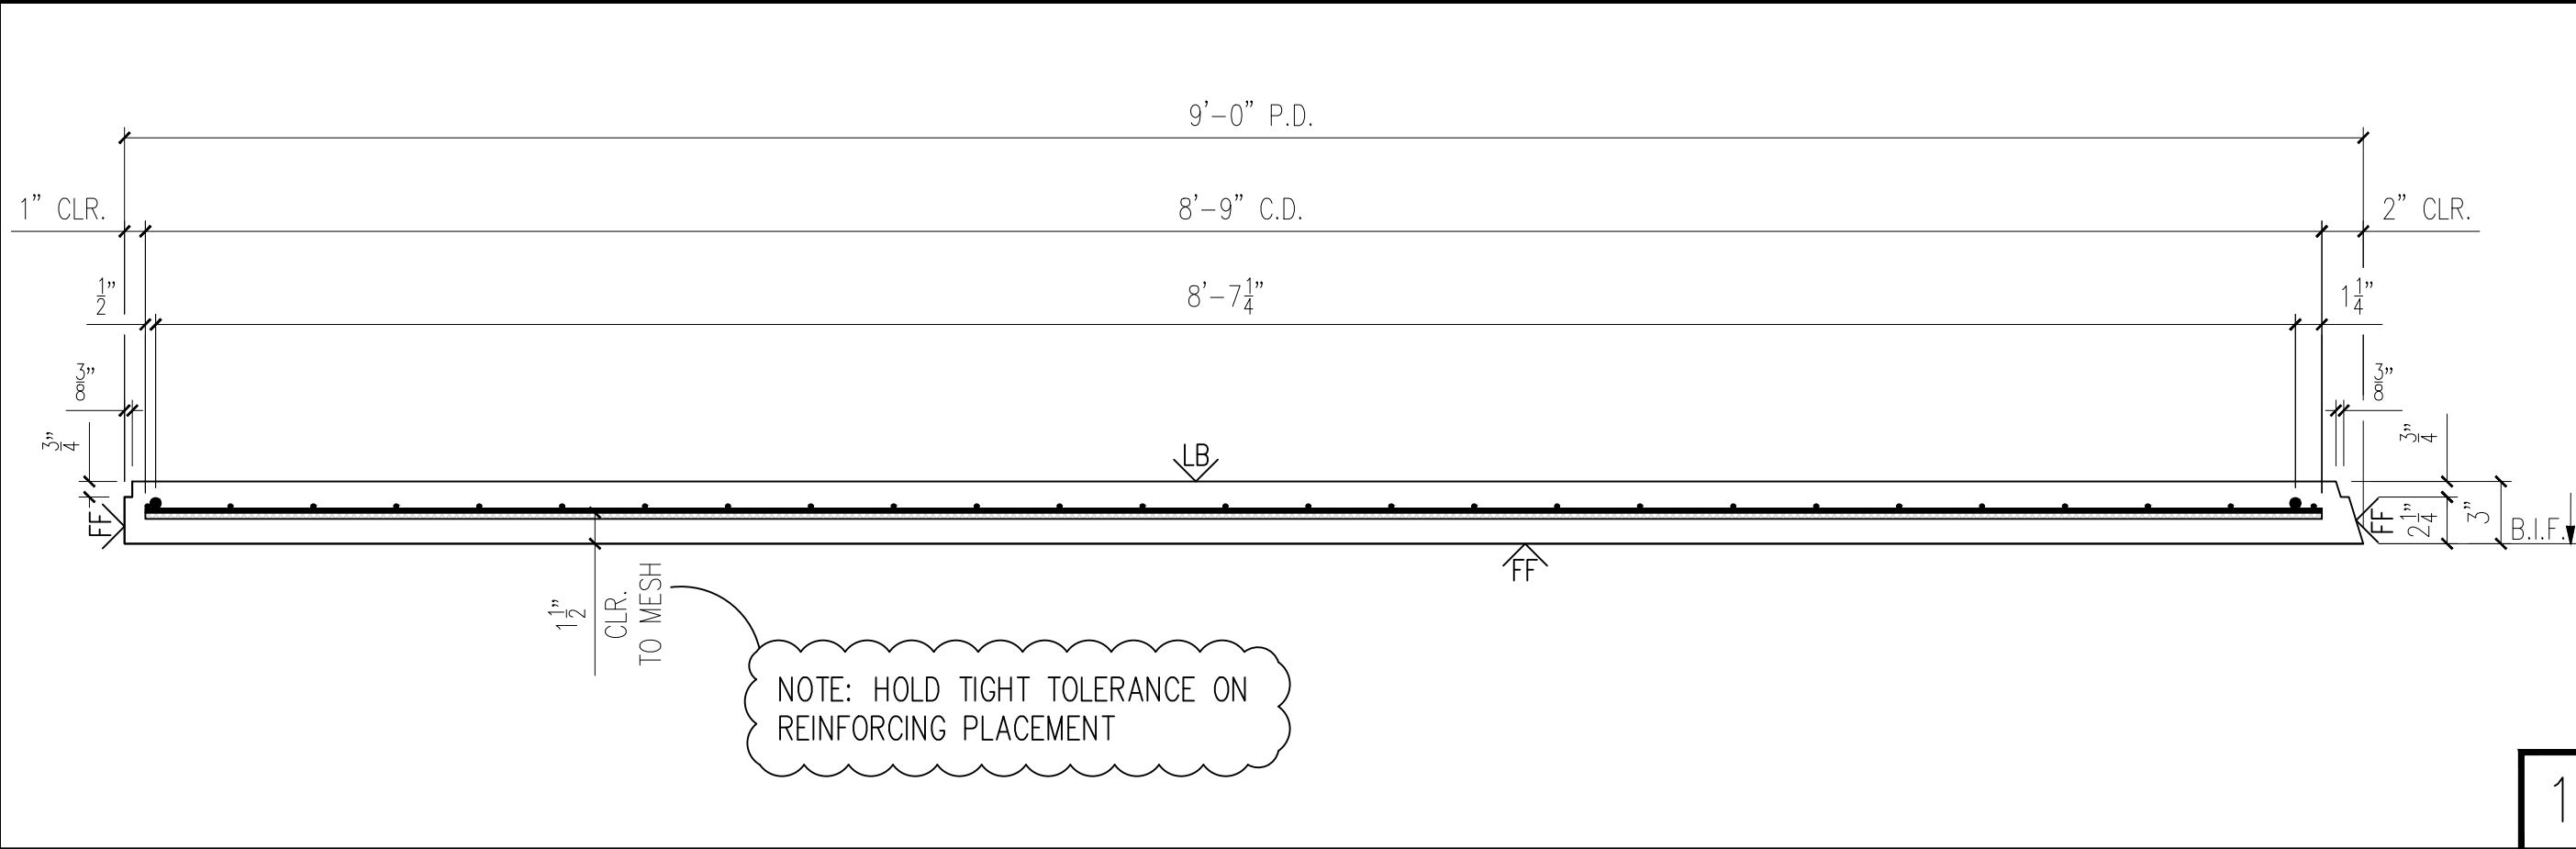


25-4460
Olin Chemical Building
ID - CVW
SIDE WALL A - BSDG-10A
Weight - 3,185 LBS Each
1 Required

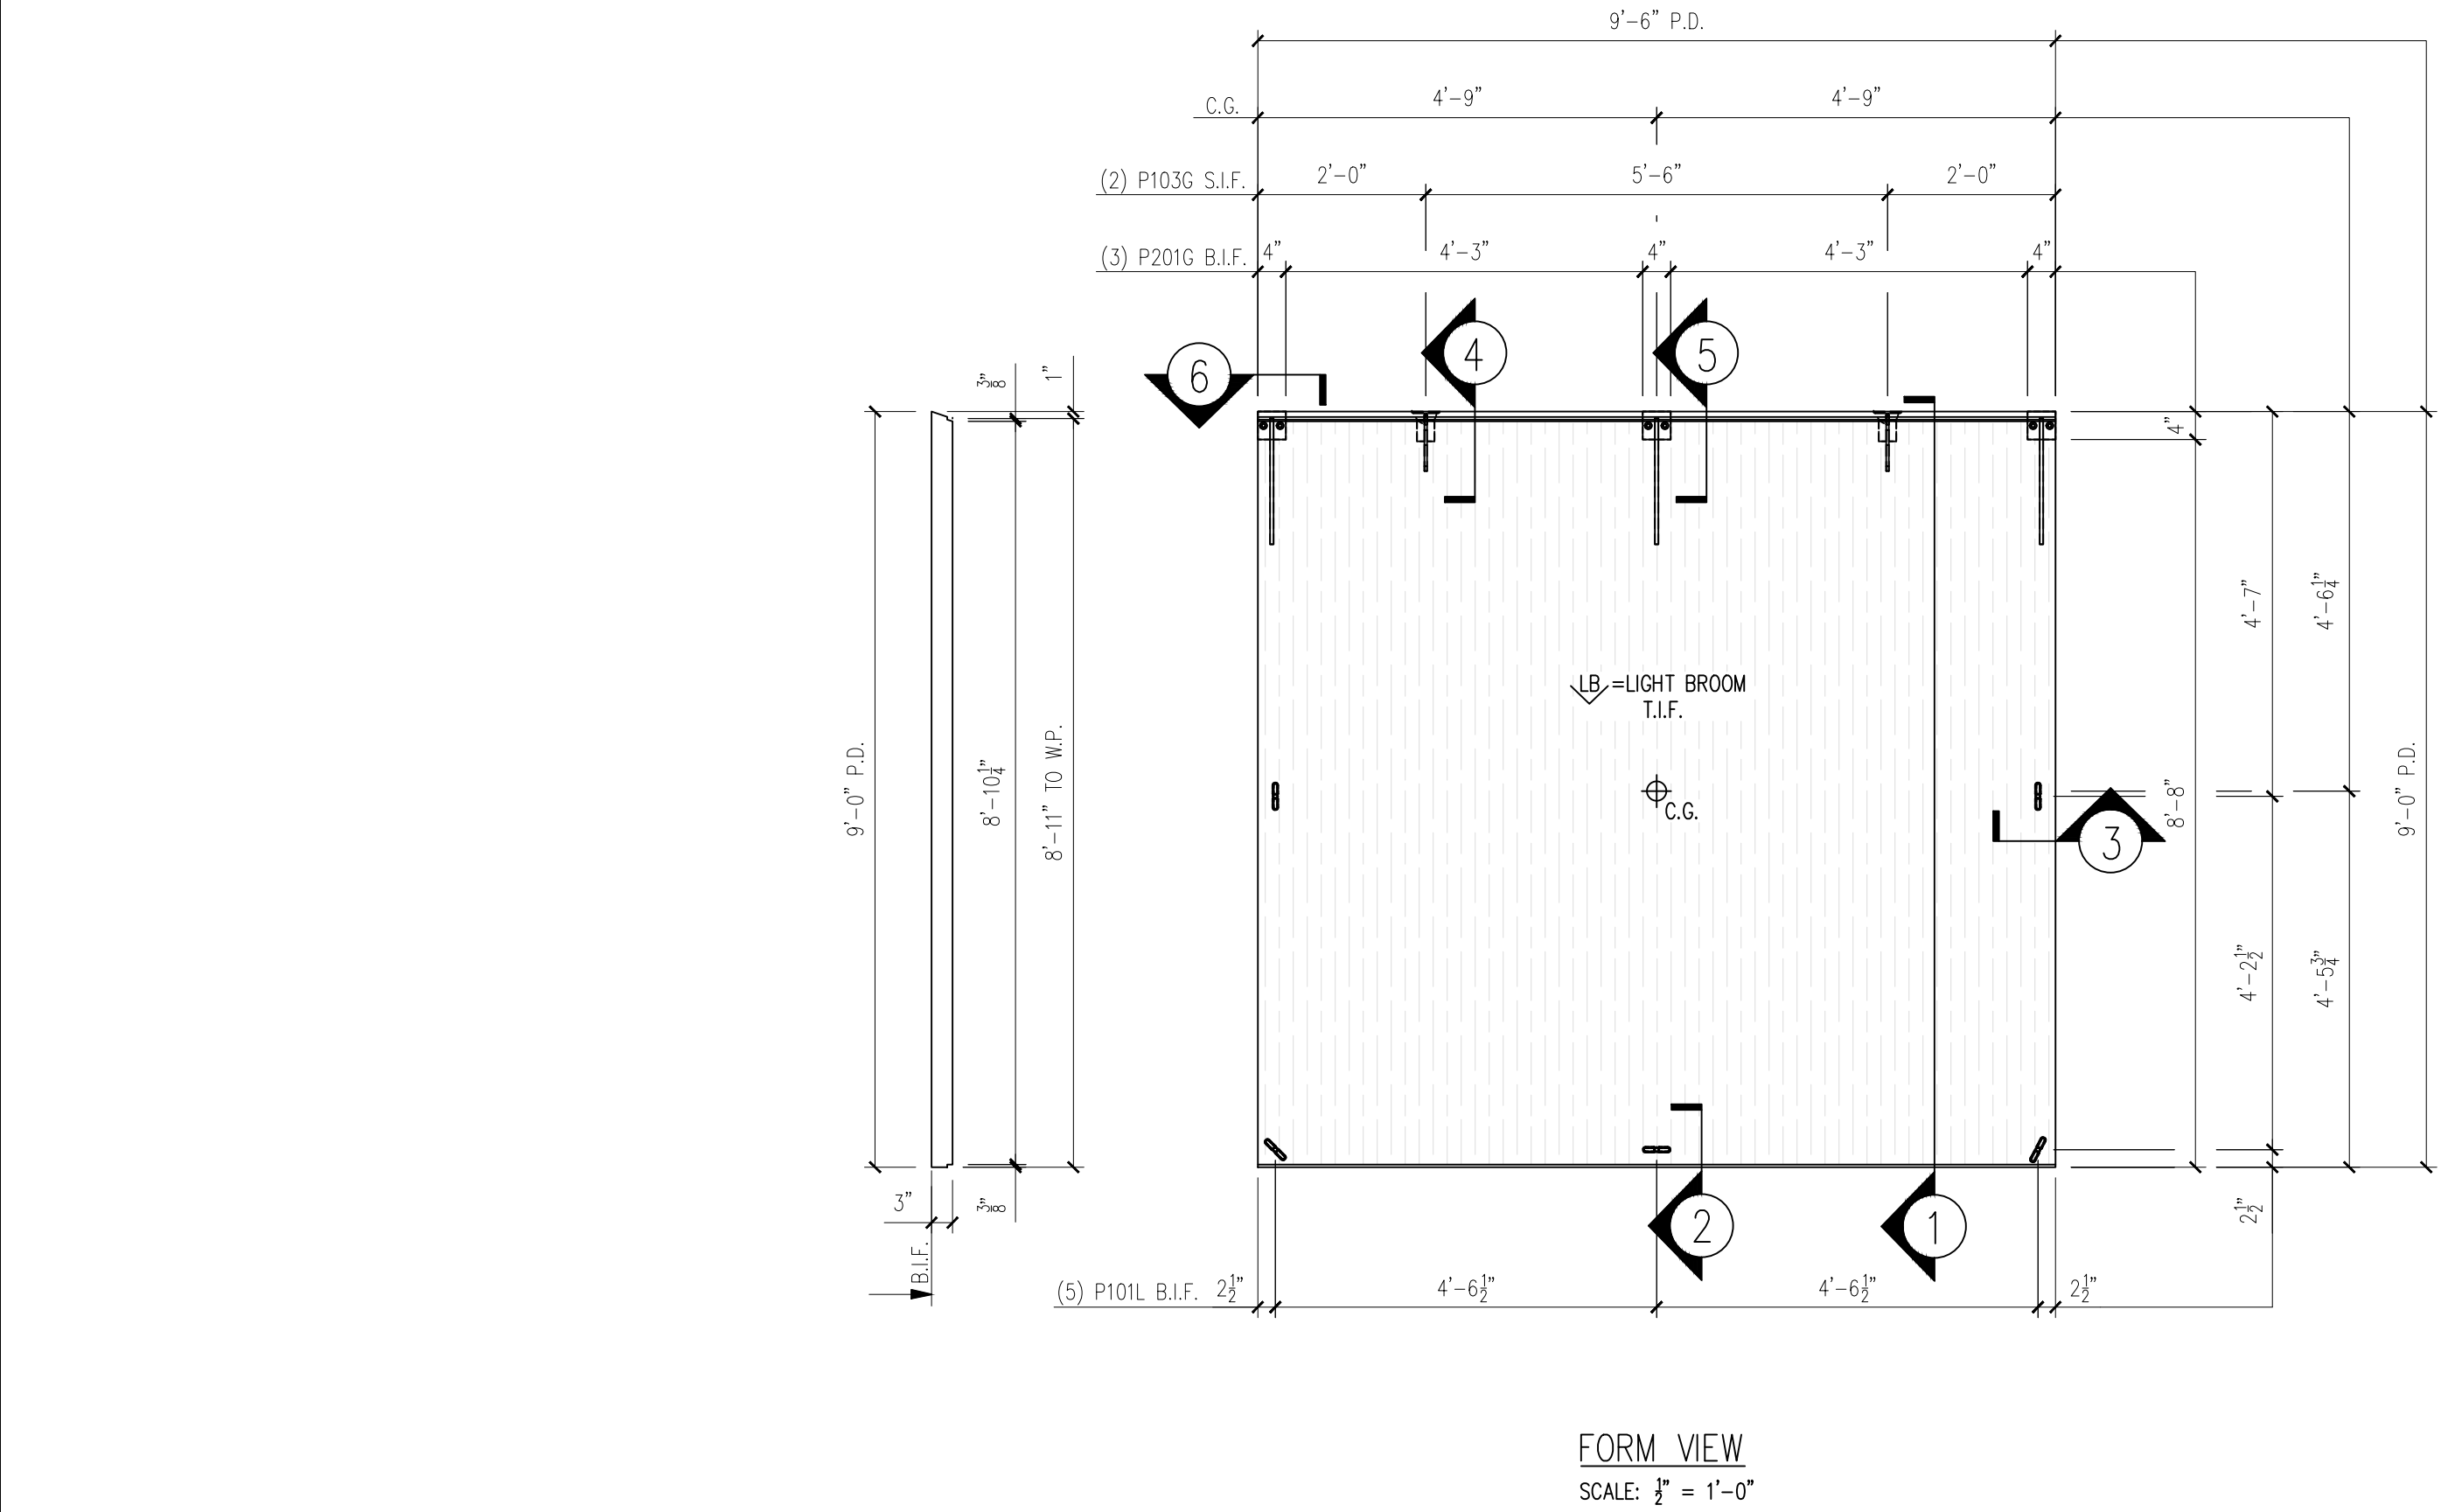

MESSAGE CENTER

1. REFER TO DETAILS AND SECTION FOR REINFORCEMENT PLACEMENT





2. SHOP TICKET SHOWS EXTERIOR FINISH CAST FACE UP

CHECKED BY: DATE:

APPROVED BY: DATE:

BILL OF MATERIALS		
MARK #	DESCRIPTION	QTY.
P101L	3/8" Ø X 1 1/2" F-63 FLARED THIN SLAB COIL INSERT (ELECTROPLATED)	5
P201G	4" X 4" X 3/8" W/(2) 3/8" Ø X 1 1/2" H.A.S. W/ 1'-4" BENT REBAR (GALV.)	3
P103G	2 TON TECH ERECTION ANCHOR (GALV.)	2

HANDLING INSTRUCTIONS

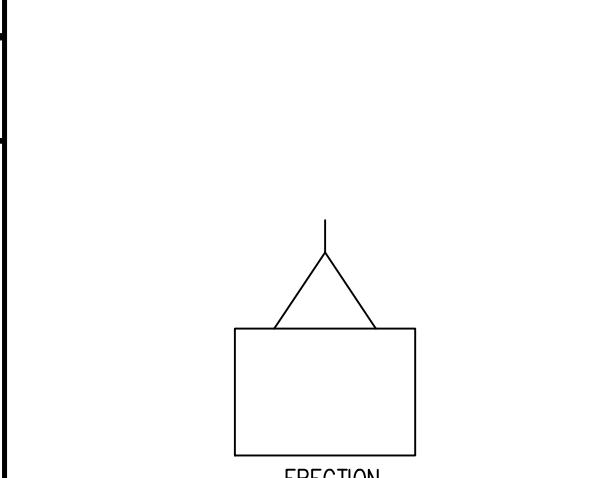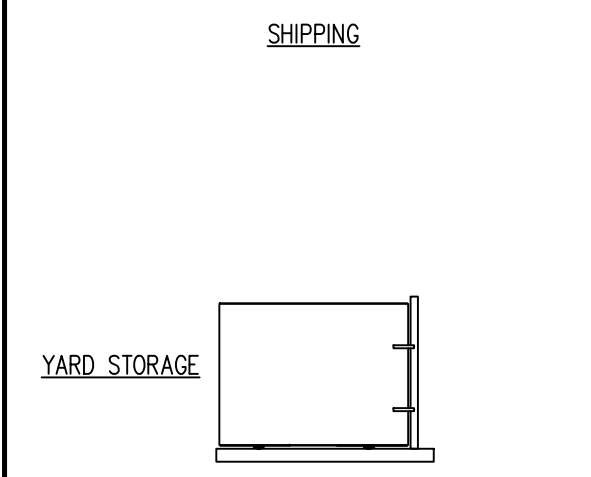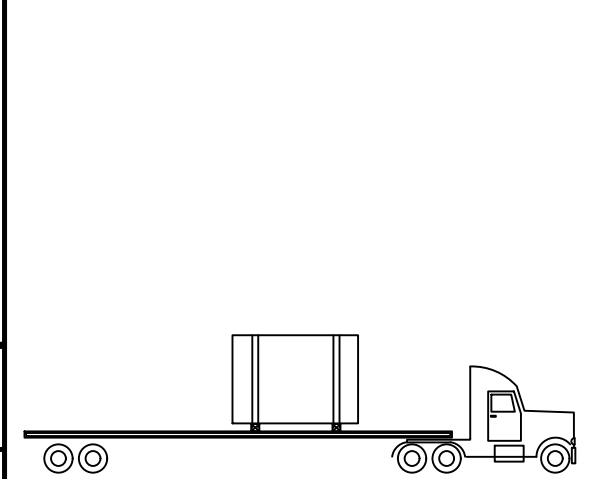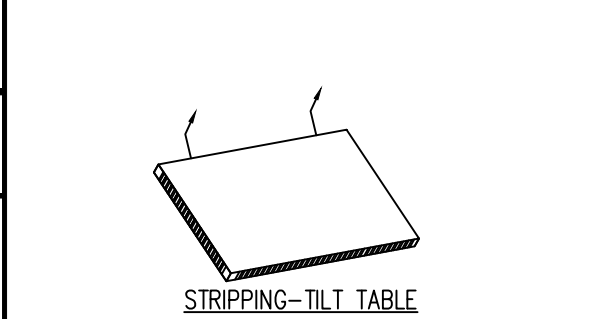

CONCRETE INSTRUCTIONS	
CONCRETE RELEASE @	2,500 P.S.I.
CONCRETE @ 28 DAYS:	5,000 P.S.I.

CONCRETE MIXES	
CONCRETE - GRAY	VOLUME = 0.78 C.Y.
CONCRETE - MIX 1	VOLUME = - C.Y.
CONCRETE - MIX 2	VOLUME = - C.Y.
SOFT SOUND	VOLUME = - C.Y.
TOTALS	VOLUME = 0.78 C.Y.

WEIGHT: 3,185 LBS.

FINISHING INSTRUCTIONS

LB = LIGHT BROOM FINISH	
FF = FORM FINISH	
WT = WET TROWEL FINISH	
H = 9'-0"	SQ.FT.(T.I.F.) = 84.94
W = 9'-6"	SQ.FT.(T.I.F.) = -
D = 3"	SQ.FT.(T.I.F.) = -

CONTROL NUMBERS:

PRODUCT	SALES ORDER NUMBER
BUILDING	STANDARD
SHEET NUMBER	NUMBER REQUIRED
1 OF 2	2

EASI-SET® WORLDWIDE

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com
www.EasiSet.com • 800-547-4045 • Fax 540-439-2541

REV	INI.	REV
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5


PROJECT: 10'-0" x 12'-0" x 9'-0"

EASI - SET CABLED BUILDING

CONTRACTOR:


SCALE NTS
DRAWN BY FTL
CHECK BY WCR
ISSUE DATE 06.09.26
PIECE MARK BSDG-10A

25-4460
Olin Chemical Building
ID - CVW
SIDE WALL A - BSDG-10A
Weight - 3,185 LBS Each
1 Required

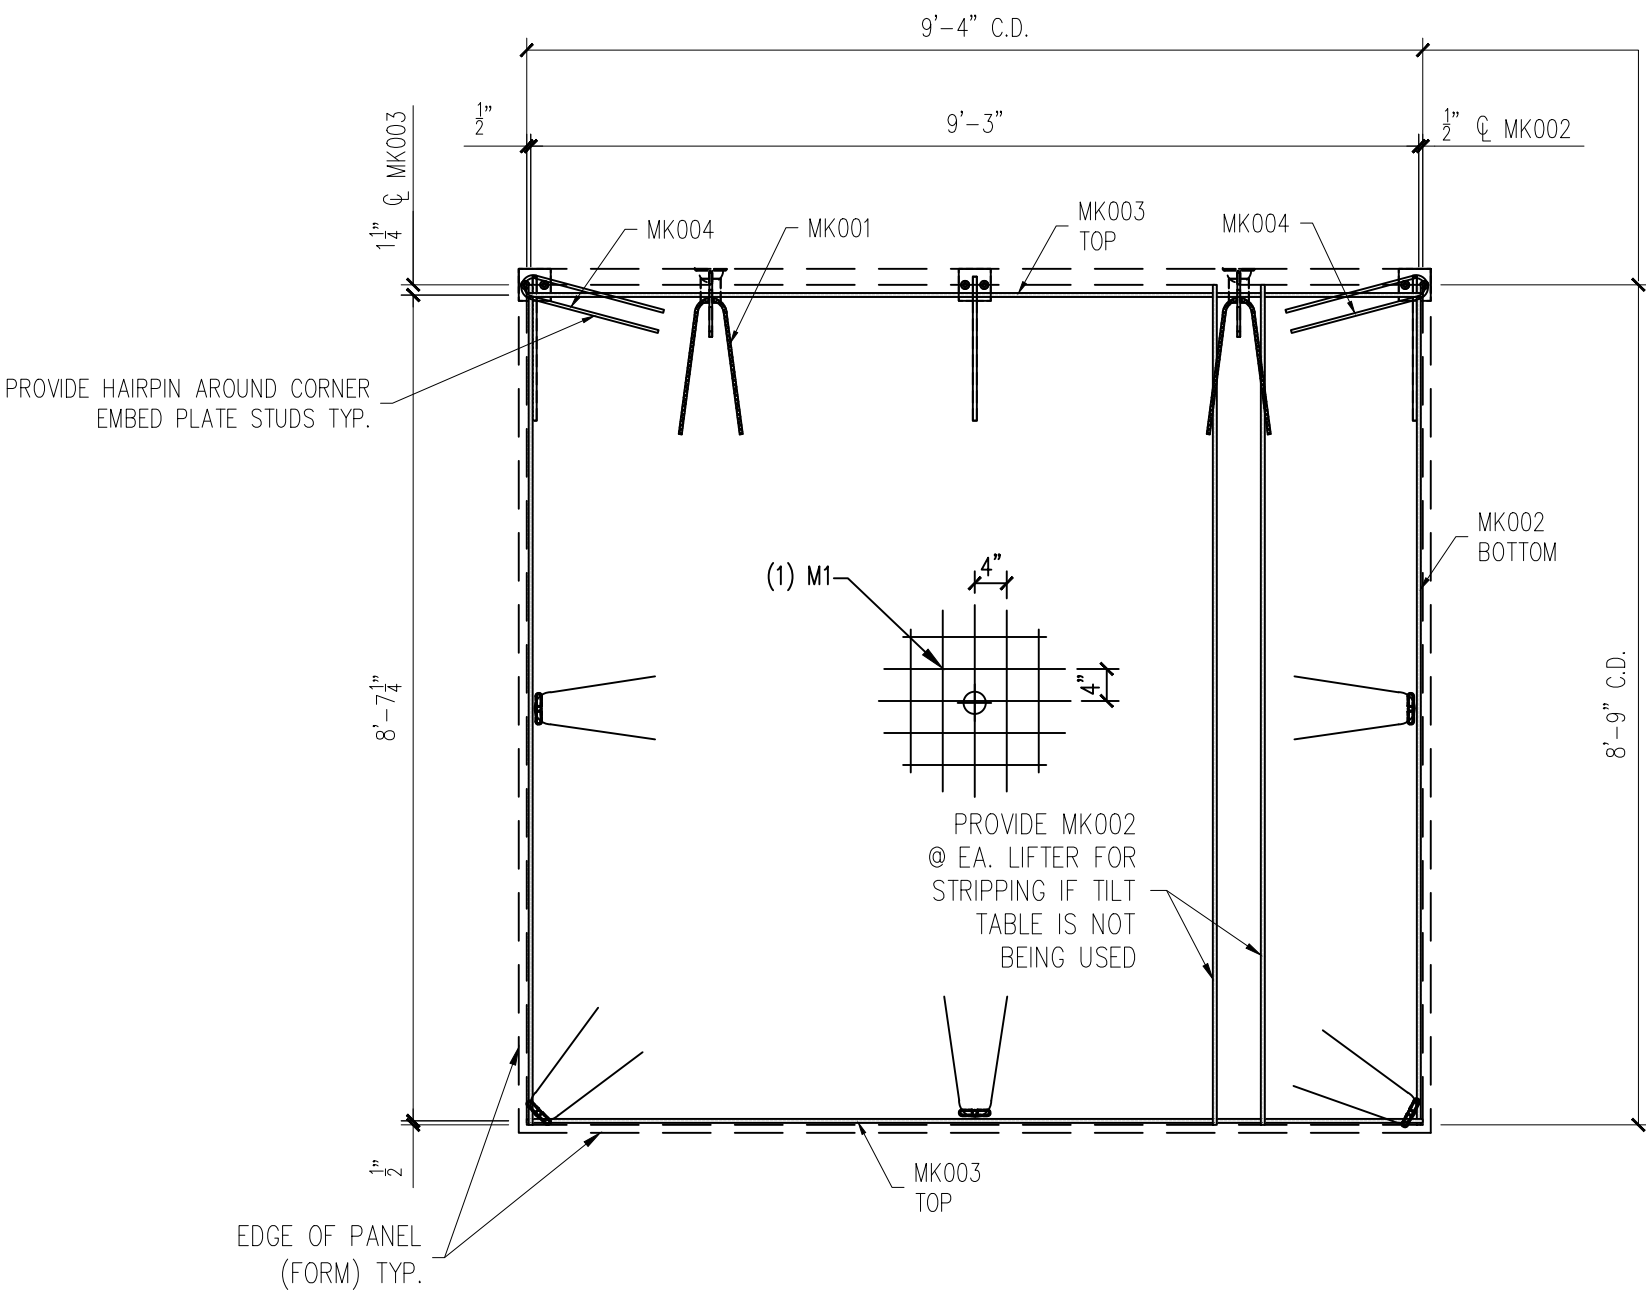

REINFORCING VIEW
SCALE: 1/2" = 1'-0"

NOTE:
DIMENSIONS PROVIDED ARE PULLED FROM EDGE OF
CAGE TO CENTERLINE OF REBAR AND TO CENTER
OF REBAR TO CENTER OF REBAR

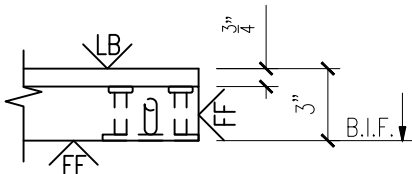

MESSAGE CENTER

1. REFER TO DETAILS AND SECTION FOR REINFORCEMENT PLACEMENT

2. SUPPLEMENTAL STEEL FOR STRIPPING AND HANDLING MAY BE ADDED AS REQUIRED.

CHECKED BY: DATE: APPROVED BY: DATE:

NOTE:
1. CONSTRUCT REBAR-MESH CAGE ACCORDING TO THE DRAWINGS. SECURE LIFTING APPARATUS TO FORM AND ADD PROPER REINFORCEMENT. PLACE REBAR-MESH CAGE AND HAIRPINS AT INSERTS WITH PROPER CLEARANCES (PER DRAWINGS).

PRODUCT	SALES ORDER NUMBER
BUILDING	STANDARD
SHEET NUMBER	NUMBER REQUIRED
2 OF 2	2

REINFORCING SCHEDULE		
MARK #	DESCRIPTION	QTY
MK001	#3 X 3'-0"	7
MK002	#3 X 8'-9"	2
MK003	#3 X 9'-4"	2
MK004	#3 X 3'-1"	2
MESH SCHEDULE		
MARK #	DESCRIPTION	QTY
M1	W4XW4 4"X4" WWF 9'-4" X 8'-9"	1

EASI-SET® WORLDWIDE

5119 Catlett Rd. • Midland, VA 22728 • info@EasiSet.com

www.EasiSet.com • 800-547-4045 • Fax 540-439-2541

REV	INI.	DESCRIPTION	DATE
△	-		-
△	-		-
△	-		-
△	-		-
△	-		-

PROJECT: 10'-0" x 12'-0" x 9'-0" EASI - SET CABLED BUILDING

CONTRACTOR: -

SCALE NTS

DRAWN BY FTL

CHECK BY WCR

ISSUE DATE 06.09.26

PIECE MARK BSDG-10A